


**BRI5N60**





**/ Package Dimensions**

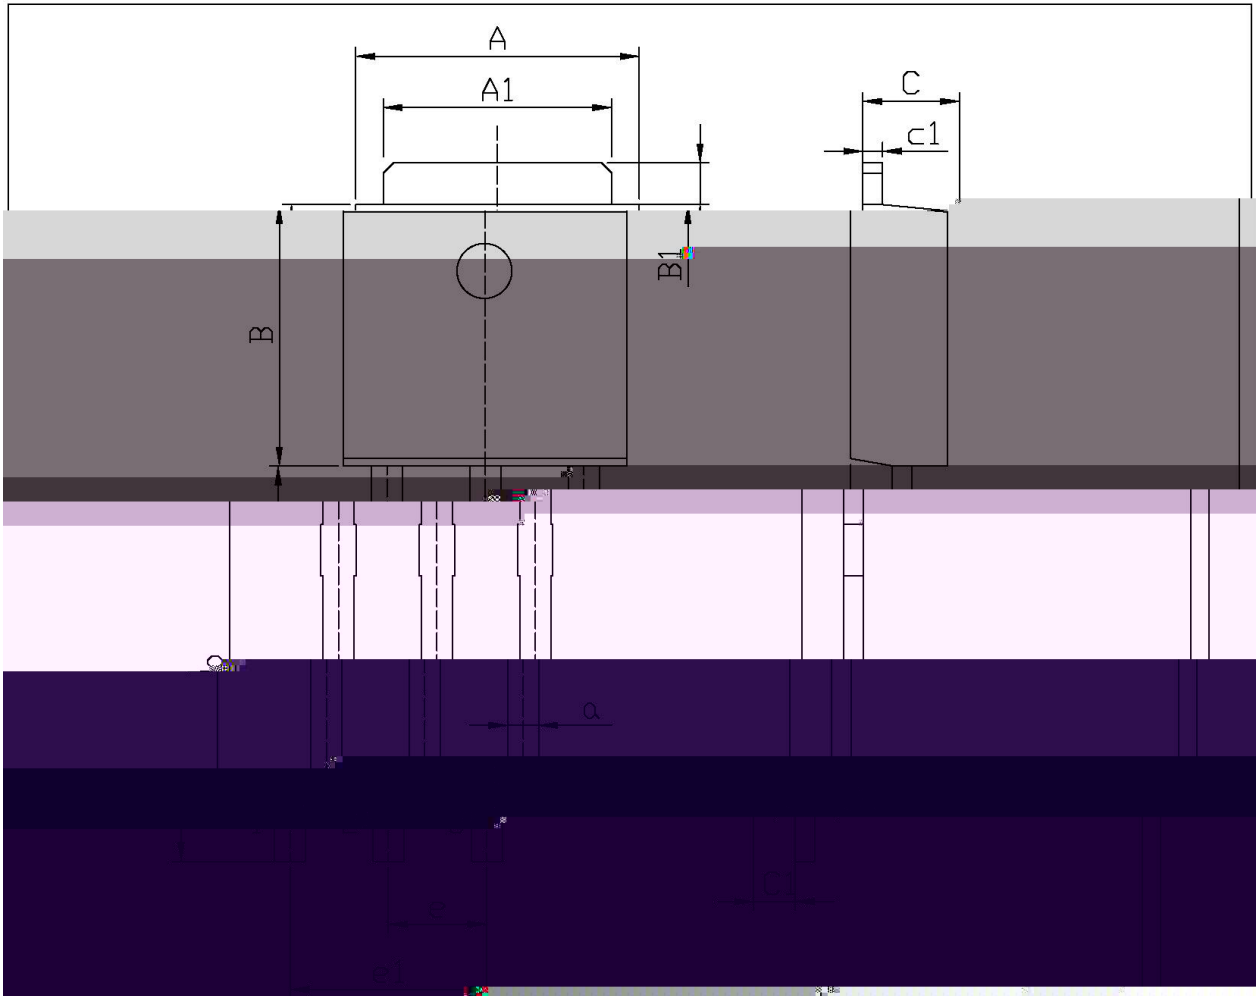


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters			Dimensions In Millimeters		
Min	Max	Symbol	Min	Max	Symbol	Min	Max	Symbol
6.45	6.75	a	0.50	0.70	A			
5.10	5.50	b	9.00	9.40	A1			

T0-251

**/ Marking Instructions**

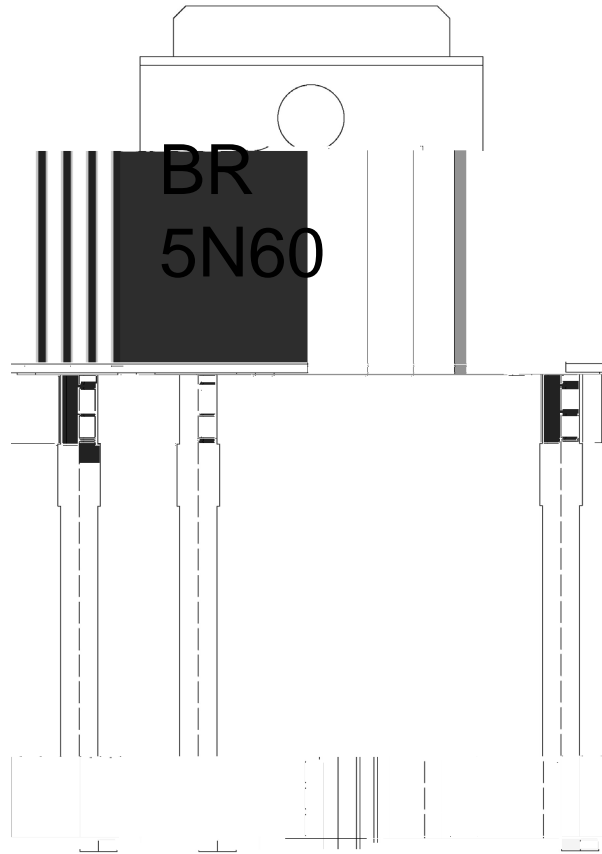

BR

5N60

\*\*\*\*


Note:

BR:           Company Code

5N60:        Product Type.

\*\*\*\*:         Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

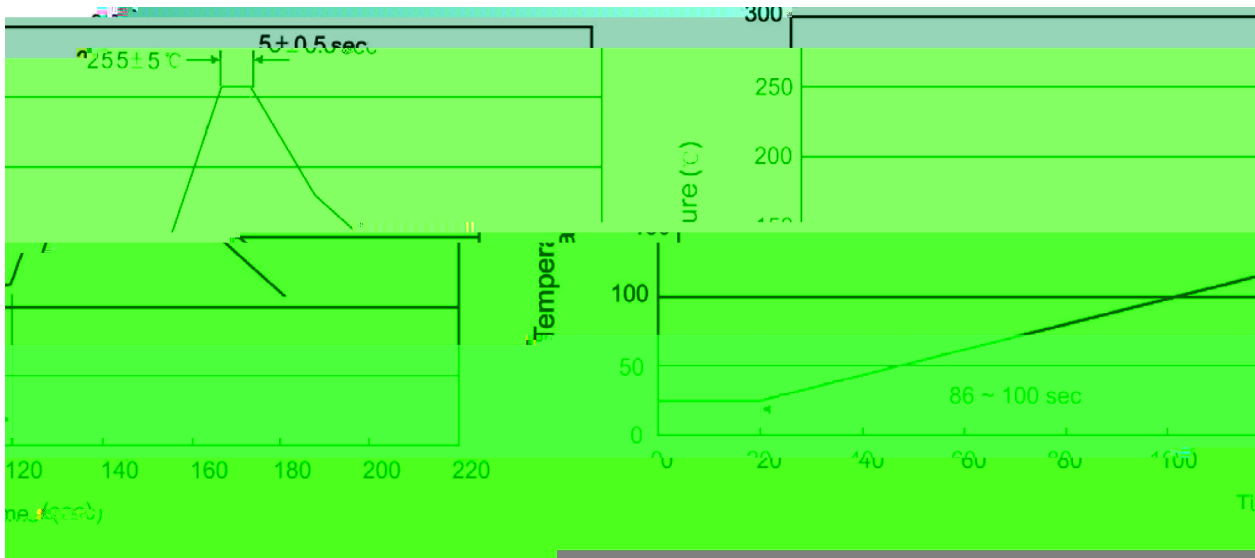

Note:

- |   |       |     |           |        |                                         |
|---|-------|-----|-----------|--------|-----------------------------------------|
| 1 | 25    | 150 | 60        | 90sec; | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 255±5 |     | 5±0.5sec; |        | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 |       | 2   | 10        | /sec.  | 3. Cooling Speed: 2~10 /sec.            |

/ Resistance to Soldering Heat Test Conditions

270±5                      10±1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension (unit mm <sup>3</sup> )		

/ TUBE

Package Type	Units				Dimension (unit mm <sup>3</sup> )		