


**BRI740**  
Rev.A Sep.-2023

TO-251          N






**/ Package Dimensions**

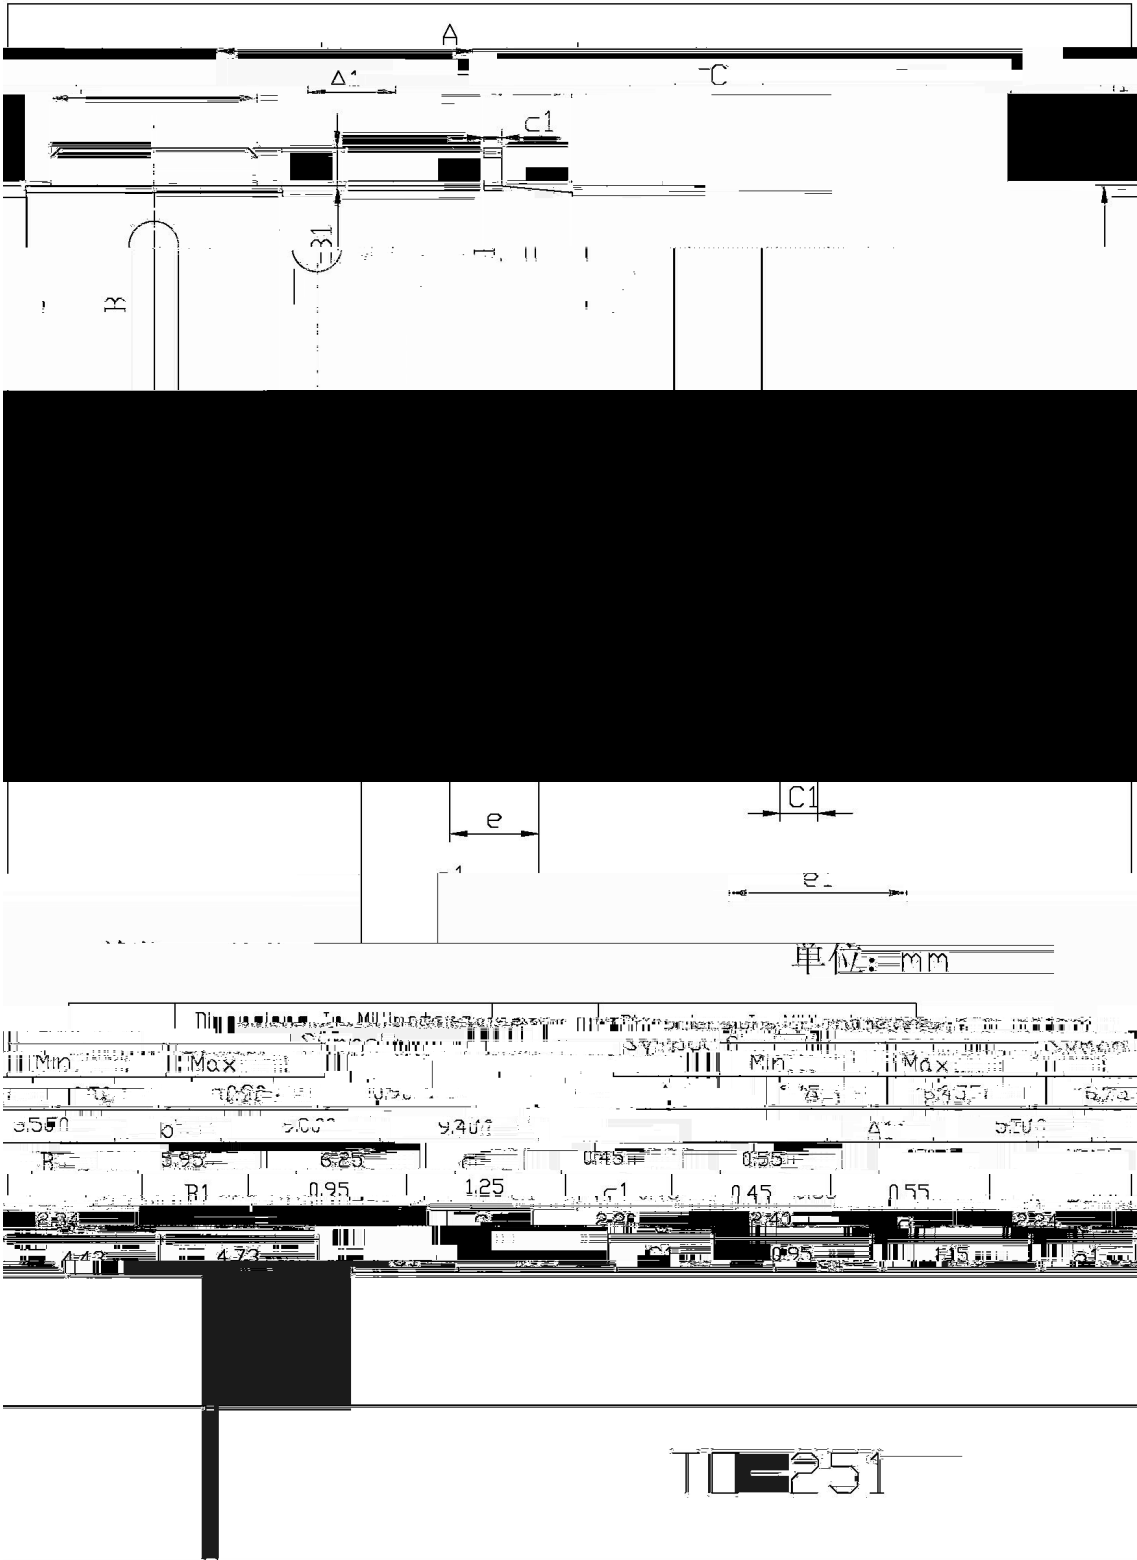

**/ Marking Instructions**

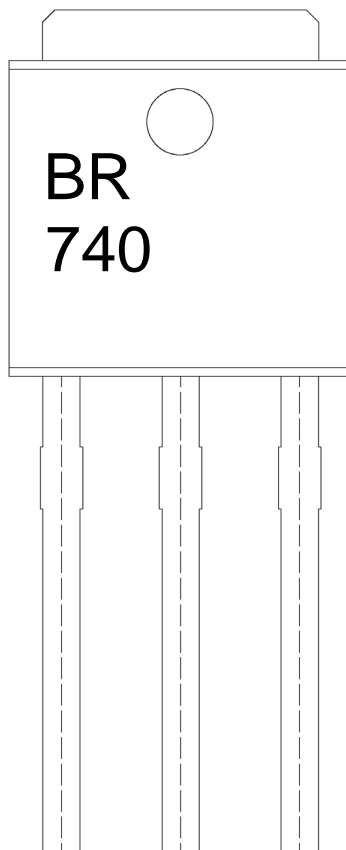

BR

740

\*\*\*\*

Note:

BR: Company Code

740: Product Type Code

\*\*\*\*: Lot No. Code, code change with Lot No

**( ) / Temperature Profile for Dip Soldering(Pb-Free)**



- |   |       |     |       |          |       |   |
|---|-------|-----|-------|----------|-------|---|
| 1 | 25    | 150 | 60    | 90sec;   | Note: | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 255±5 |     | 5±0.5 | sec;     |       | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 |       |     | 2     | 10 /sec. |       | 3. Cooling Speed: 2~10 /sec.            |

**/ Resistance to Soldering Heat Test Conditions**

270±5                      10±1 sec.                      Temp.:270±5                      Time:10±1 sec

**/ Packaging SPEC.**

/ BULK

| Package Type | Units | Dimension | (unit mm <sup>3</sup> ) |
|--------------|-------|-----------|-------------------------|
|--------------|-------|-----------|-------------------------|