

Schottky Barrier Diode in a TO-220 Plastic Package.

Low forward voltage drop, Low power loss, high efficiency.



For use in high frequency inverters, switching power supplies, freewheeling diodes, dc-to-dc converters and reverse battery protection.



PIN1 Anode PIN 2 4 Cathode PIN 3 Anode

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	V
Maximum RMS Voltage	V_{RMS}	31.5	V
Maximum Average forward current	$I_{F(AV)}$	30	A
Non-Repetitive Peak Surge Current	I_{FSM}	300	A
Thermal Resistance Junction to Case	R_{Jc}	2	/W
Junction Temperature Range	T_j	150	
Storage Temperature Range	T		

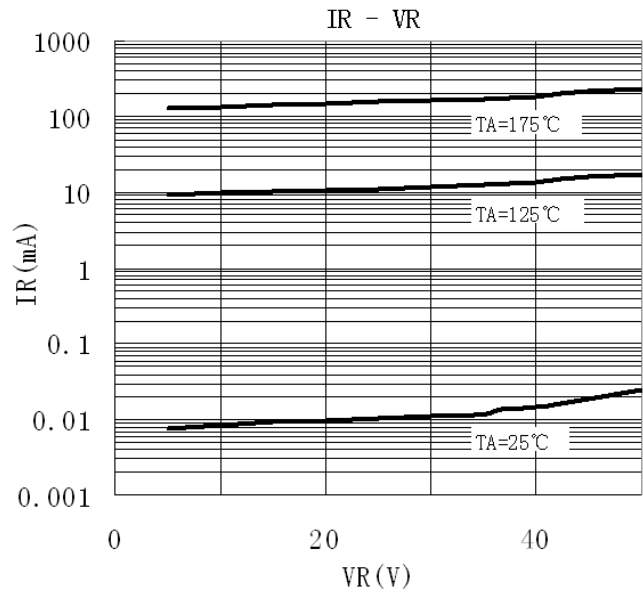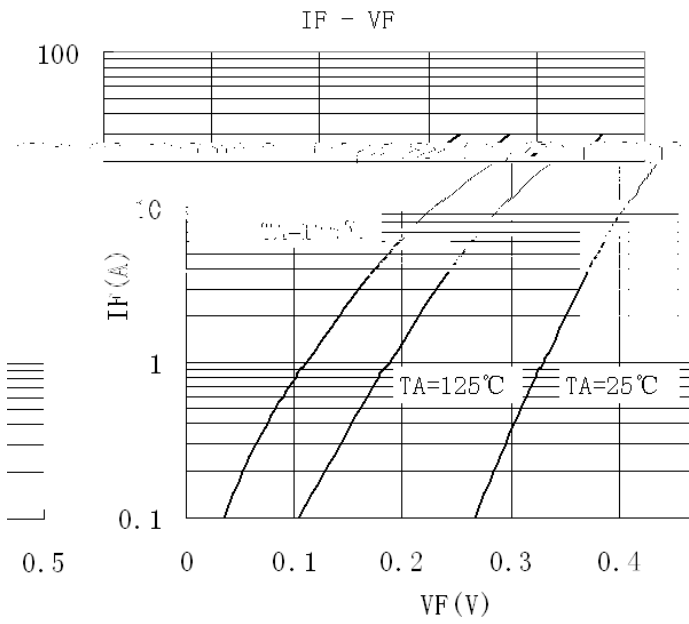

Rev. A Mar.-2019

