


BRMJD31CDPQ
Rev.A Jan.-2023

DATA SHEET


Î ? d • Ž ¢ / Electrical Characteristic Curve

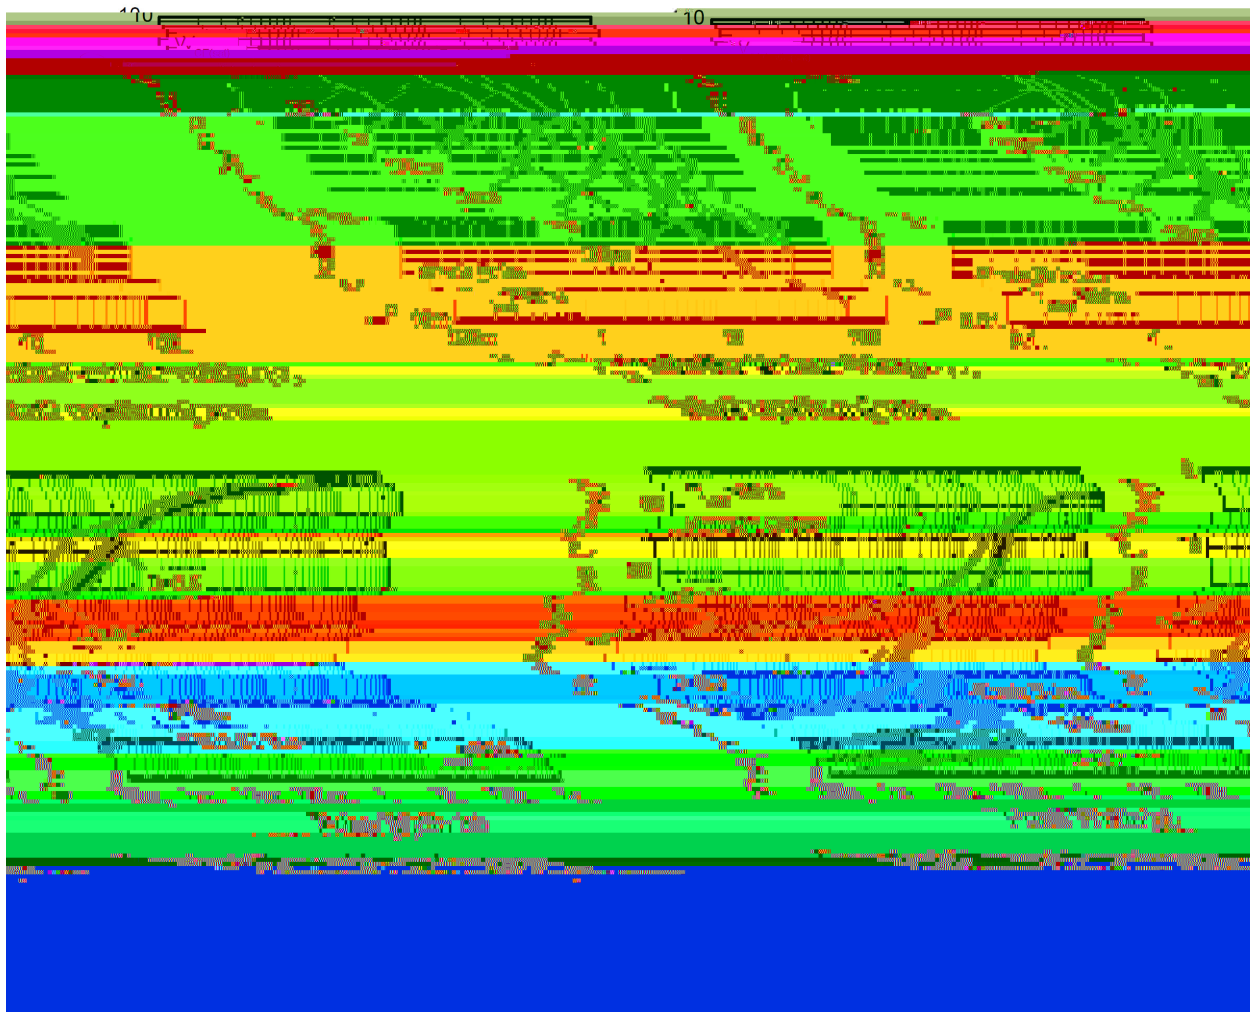

BRMJD31CDPQ

Rev.A Jan.-2023


, M y f / Marking Instructions

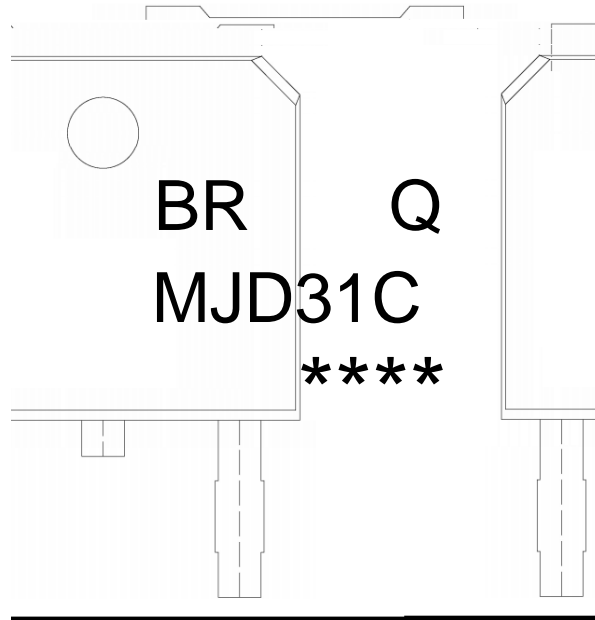

- ^a ç y
- BR y , [W A
- Q y V ñ —)í D } ö œ
- 3 0 *)y D } ° Z
- y ÿ D Z W A k š ÿ D Z J
- Note:
- BR: Company Code
- Q: Automobile halogen-free product Code
- MJD31C: Product Type
- ****: Lot No. Code, code change with Lot No

šWD t...•Žç (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HPSHUDWXUH

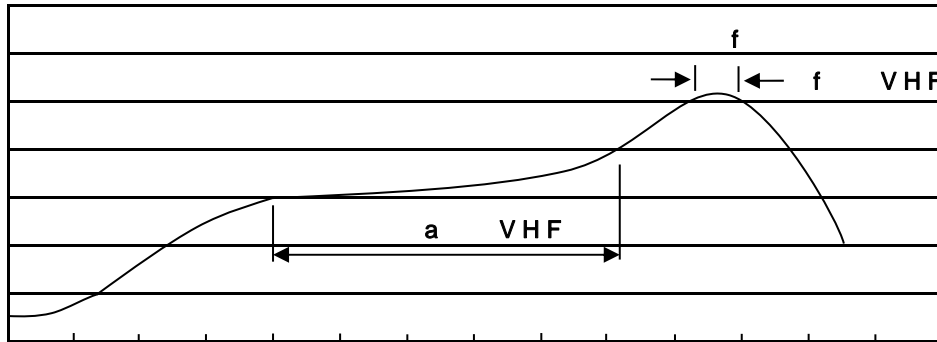

7LPH VHF

a ç y

Note:

- 1. Preheating: 150~200 - , Time: 60~120sec.
- 2. Peak Temp.: 255 r5 - , Duration: 5 r0.5sec.
- 3. Cooling Speed: 2~10 - /sec.

„ĀD /Cā p ~ »] / Resistance to Soldering Heat Test Conditions

“† y 260 r5 - ž • y 10 r1 sec. Temp.: 260±5 Time: 10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û iH					Dimension ;>û p . (unit Åmm ³)		
	Units/Reel / - -	Reels/Inner Box - - / -	Units/Inner Box / -	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
TO-252	2,500	2	5,000	6	30,000	s x16	360x360x50	380x335x366

ì' x / TUBE

Package Type 7>û ~ E	Units ;>û iH					Dimension ;>û p . (unit Åmm ³)		
	Units/Tube /•1x	Tubes/Inner Box •1x / -	Units/Inner Box / -	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Tube•1x	Inner Box	Outer Boxç
TO-251/252	75	48	3,600	5	18,000	526x20.5x5.25	555x164x50	575x290x180

„Đ y f / Notices