
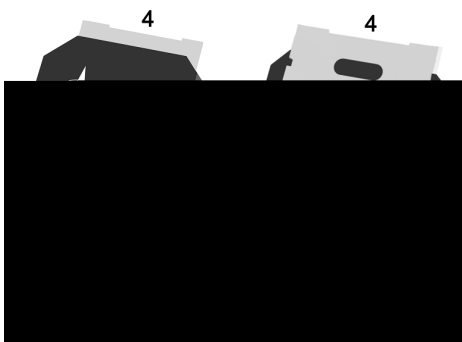


BRMJD41CQ

TO-252 NPN
NPN

BRMJD42CQ AEC-Q101







/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ

/ Electrical Characteristic Curve

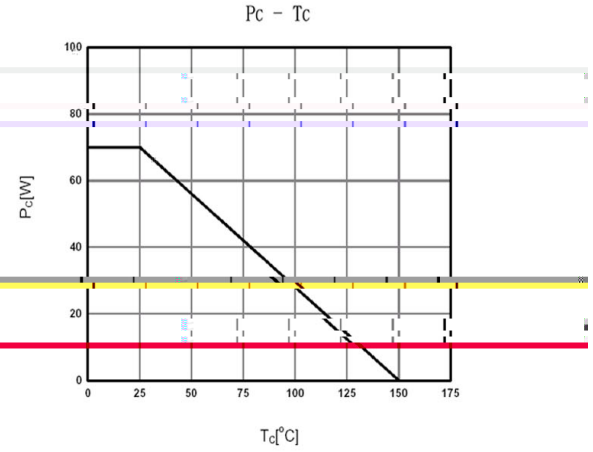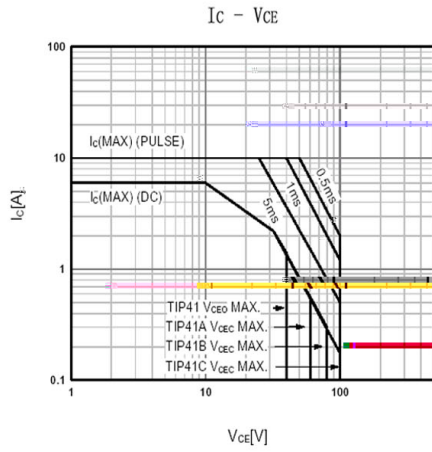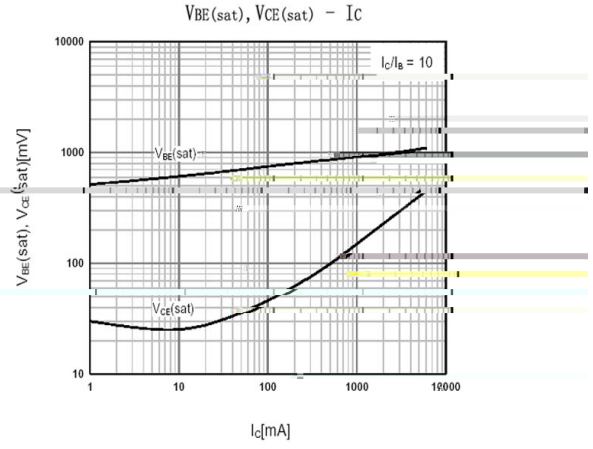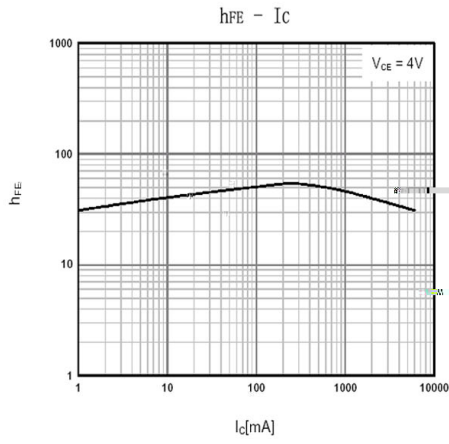


/ Package Dimensions

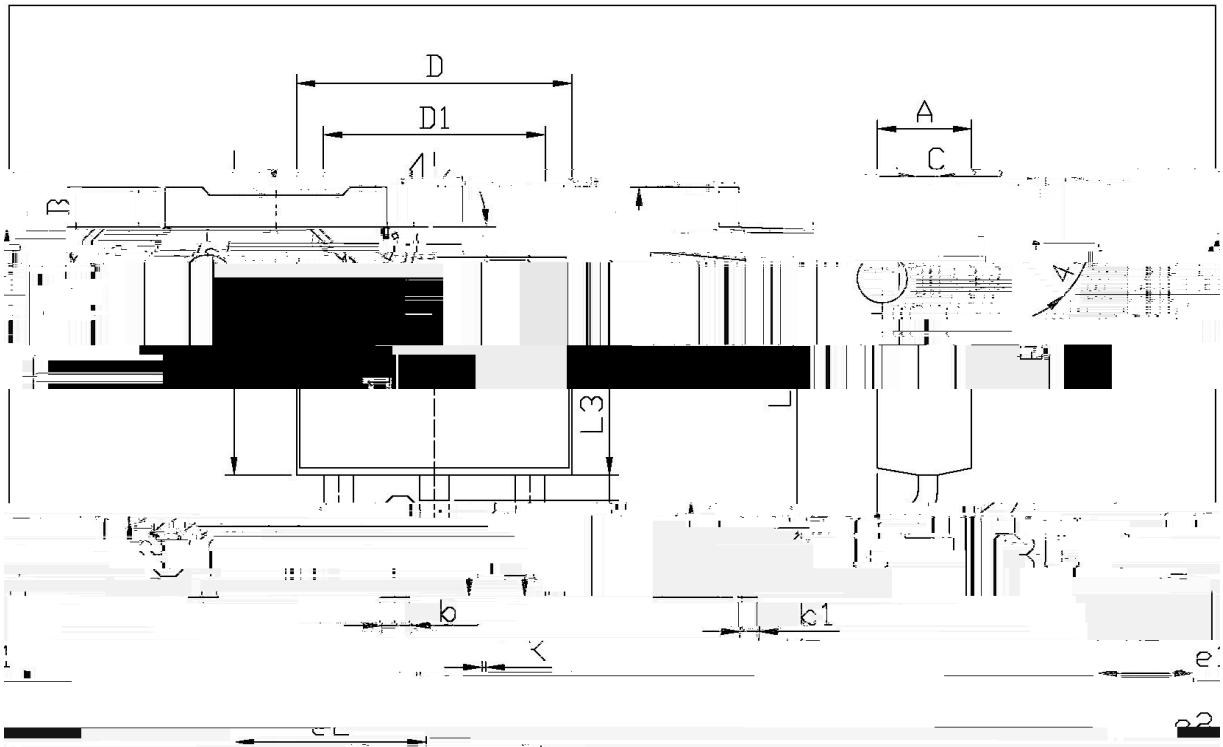

单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Min	Max	Min	Max	Min	Max
B	0.95	1.25	e1	2.24	2.34		
b1	0.70	0.90	L	4.20	4.30		
b	0.75	0.95	L3	0.95	1.05		
D	5.50	5.60	D1	5.10	5.50		

TO-252

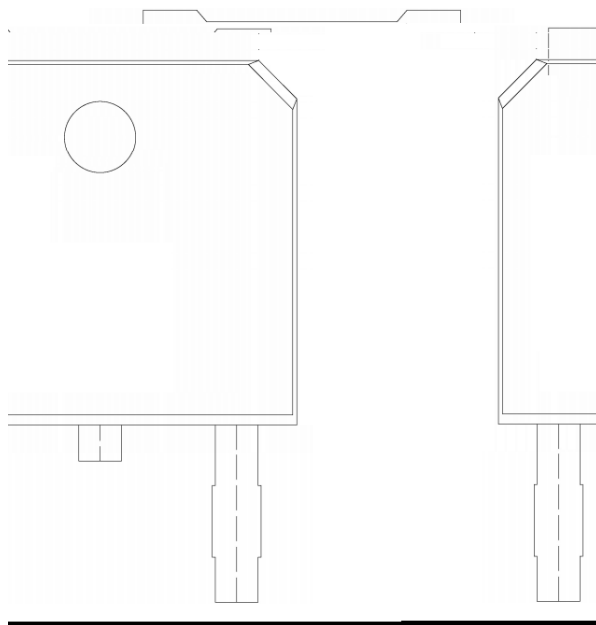

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

--	--	--