

5 é / Descriptions

9 5: .> // x 4 6 4 4 6 4 f â'ož

* U [H B i k c o n 4 6 4 and N 6 4 transistor in a SOT-363 Plastic Package

α^a / Features

Ä x ž å Š k • ç è — < k × 5 « ^ y ò - v i k —) í D } ož

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, HF Product.

Đ ÷ / Applications

9 • ¼ 0 • μ è Y C Ü è ož

Switching applications, interface circuit and driver circuit applications.

Ã W] Ô • / Equivalent Circuit

• Ů - æ / Pinning

Z Ü B , M V / h_{FE} Classifications & Marking

Marking	H214
---------	------

§ Absolute Maximum Ratings(Each Transistor,Ta=25℃ ;)

Parameter	Symbol	Rating	Unit
Output Voltage	V _{CC}	50	V
Input Voltage	V _{IN}	40	V
		-6	V
Output Current	I _{CM}	100	mA
	I _O	70	mA
Collector Dissipation	P _C	150	mW
Junction Temperature	T _j	150	
Storage Temperature Range	T _{stg}	-55 ~ 150	

§ Electrical Characteristics((Each Transistor,Ta=25℃ ;)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage(OFF)	V _{I(off)}	V _{CC} =5.0V I _O =100 μA	0.3			V
Input Voltage(ON)	V _{I(on)}	V _O =0.3V I _O =1mA			1.4	V
Output Voltage	V _{O(on)}	I _O =5mA I _I =0.25mA			0.3	V
Input Current	I _I	V _I =5.0V			0.88	mA
Output Cut-off Current	I _{O(off)}	V _{CC} =50V V _I =0V			0.5	μA
DC Current Gain	G _I	V _O =5.0V I _O =5.0mA	68			
Transition Frequency	f _T	V _{CE} =10V I _C =5.0mA f=100MHz		250		MHz
Resistance1	R ₁		7	10	13	K
Resistance Ratio	R ₂ /R ₁		3.7	4.7	5.7	

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ø □ =) ¢ / Package Dimensions

H214 *

 y


ÿ D Z W A k š ÿ D Z J

6 O T

Lot No. Code, code change with Lot No

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HPSHUDWXUH

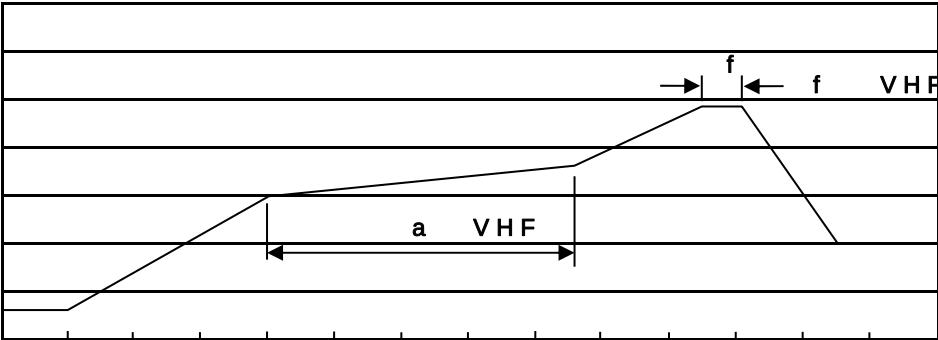

7LPH VHF

a č y

- 10• Ä ½ “† 150 ½180 - k ž • 60 ½90sec;
- 20• Q > “† 245 r5 - k ž • 4 Ò 5 r0.5sec;
- 30•D N ò i Ò 0 ,† 2 ½10 - /sec.

Note:

- 1.Preheating:150~180 - , Time:60~90sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

“† y 260 r5 - ž • y 10 r1 sec. Temp.:260±5 Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û H					Dimension ;>û p . (unit Åmm³)		
	Units/Reel /-	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
SOT-363	3,000	10	30,000	6	180,000	7 s ×8	180×120×180	390×385×205

„Đ y f / Notices