

5 é / Descriptions

: 5 ') . > / / x Ý ½ Ê Ö 8 â ' ož

Ultrafast Recovery Diode in a TO-220AC Plastic Package.

□^a / Features

J J' Ù • W + ý D Ý ½ Ê Ö 8 â ' k À Ä û z F g ¥ y ä U ´ Å ož

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

Đ ÷ / Applications

9 ä È o • ä 9 o • Ý v ... v 8 â ' k Ò v 8 â ' ož

For high frequency, high voltage, high current rectifier diode, freewheeling diode.

Ã W J Ô • / Equivalent Circuit

• Û - æ / Pinning

2

1

3

PIN1 o • 2 y Cathode

PIN 3 y Anode

Z Ü B , M V / h_{FE} Classifications & Marking• - ~^a ¢ ož See Marking Instructions

Table 1 / Absolute Maximum Ratings(Ta=25 °C ;)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Average Forward Current	I_F	1 h 10	A
Peak forward surge current	I_{FSM}	100	A
Typical Thermal Resistance Junction to Case	R_{JC}	1.5	/W
Junction Temperature Range	T_J	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	


Table 2 / Electrical Characteristics(Ta=25 °C ;)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R=1mA$	600			V
Forward Voltage	V_F	$I_F=2.0A$ $T_C=25$		1.0	1.2	V
		$I_F=2.0A$ $T_C=150$		0.73	1.0	
		$I_F=10A$ $T_C=25$		1.3	1.5	
		$I_F=10A$ $T_C=150$		1.1	1.2	
Instantaneous Reverse Current(Note1)	I_R	$V_R=600V$ $T_a=25$			10	A
		$V_R=480V$ $T_a=150$			100	
		$V_R=600V$ $T_a=150$			500	
Reverse Recovery Time	t_{rr}	$I_F=0.5A$ $I_R=1.0A$ $I_{RR}=0.25A$			50	ns

Notes

- Short duration pulse test used to minimize self-heating effect.
- Unless otherwise noted, values for the parameters of a single chip

Electrical Characteristic Curve

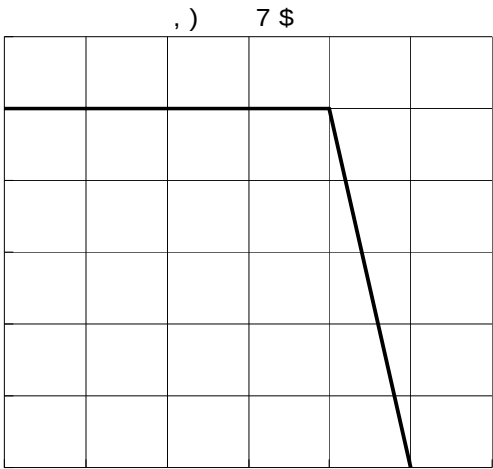

BRMUR1060AC

Rev.G Jan.-2019

, M y f / Marking Instructions

BR

MUR1060

^a ¢ y

(8 y

3 ; 8 y

y

Note:

BR:

MUR1060 y

****:

, [W A

D } ° Z

ÿ D Z W A k š Ÿ D Z J ož

Company Code

Product Type.

Lot No. Code, code change with Lot No.

