













Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	100	V
Drain Current – Continuous	$I_D$	170	mA
Drain Current– Pulsed	$I_D(T_C=25^{\circ}C)$	680	mA
Continuous Drain–Source	$I_S$	170	mA
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V




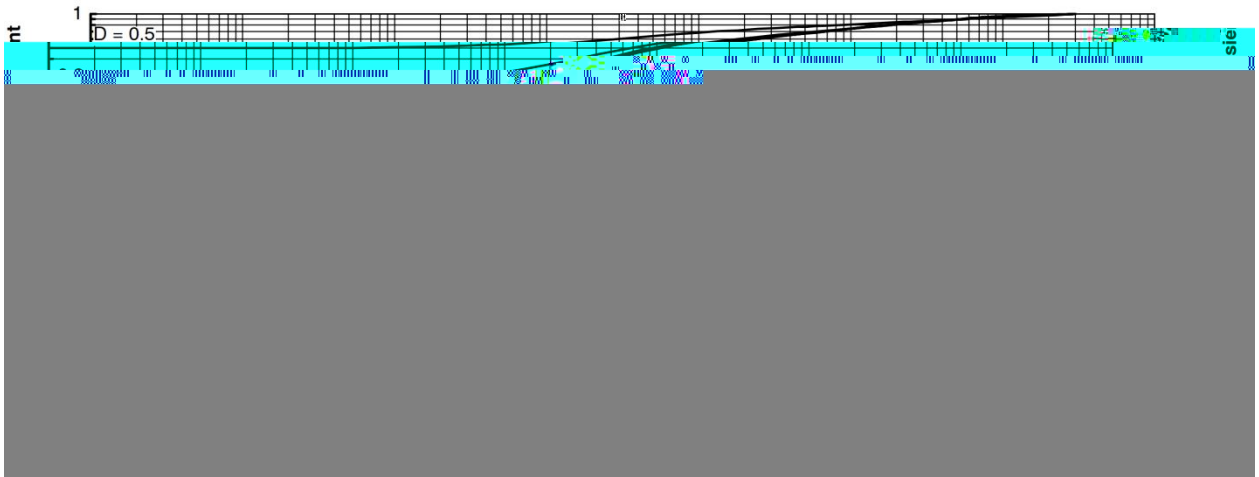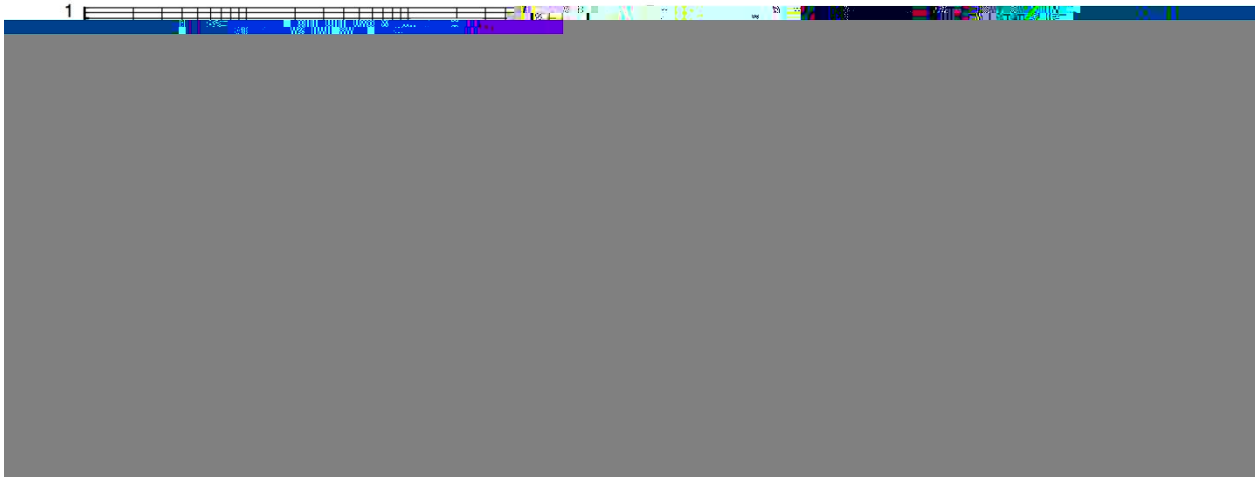



Rev.A May.-2022

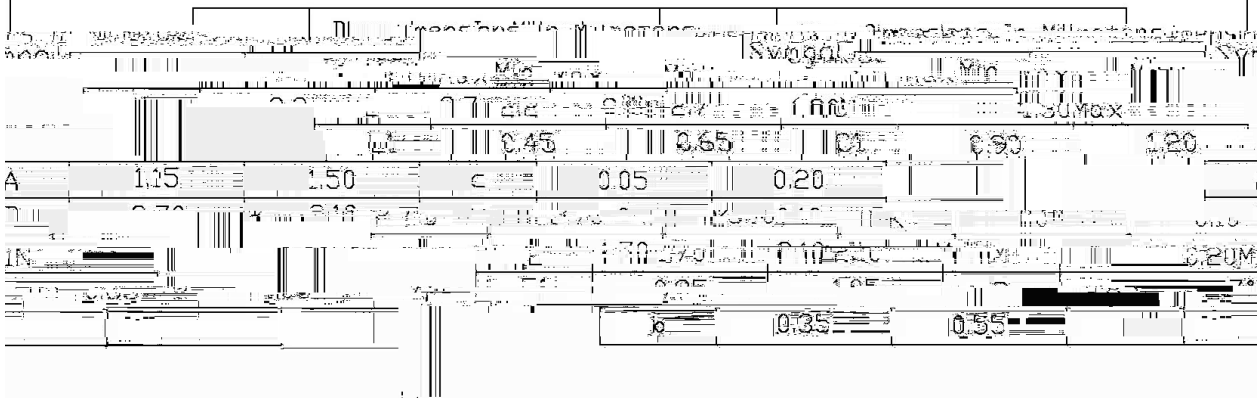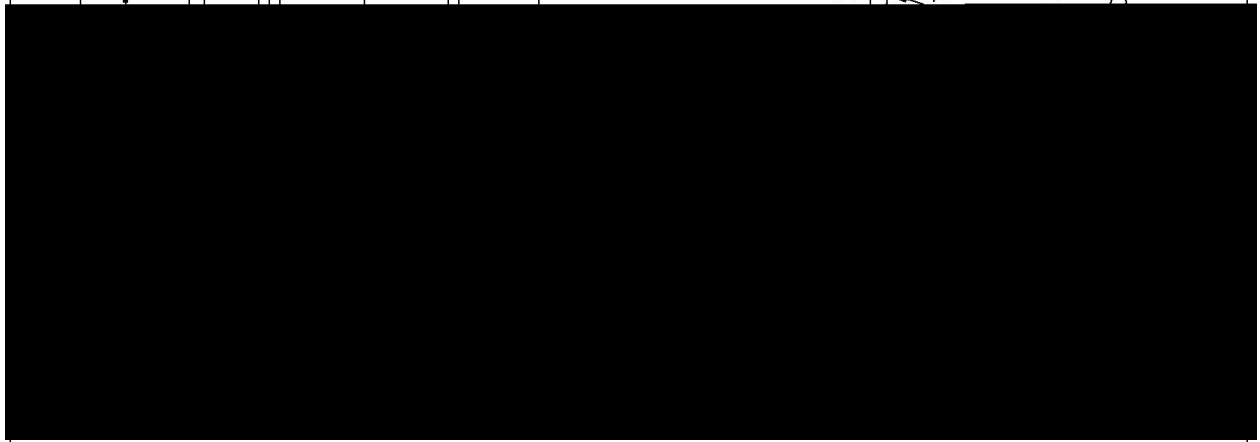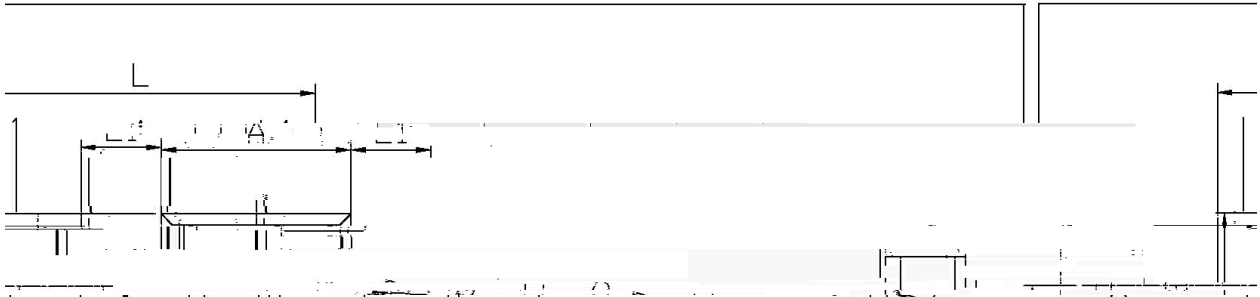



H

SA

Note:

H: Company Code

SA: Product Type




- |   |         |           |       |  |
|---|---------|-----------|-------|--|
| 1 | 150 180 | 60 90sec; | Note: | 1.Preheating:150~180°C, Time:60~90sec.   |
| 2 | 245±5   | 5±0.5sec; |       | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2       | 10°C/sec. |       | 3. Cooling Speed: 2~10°C/sec.            |

260±5°C                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

/ REEL