

5é / Descriptions

SOD-323 .#x I98ăž
Zener Diode in a SOD-323 Plastic Package.

ă / Features

S= ăvăkăž
200mW power dissipation, medium current, automated assembly processes,HF Product.


Đ / Applications

9ăž
2.4V to 39V wide zener voltage range applications.

Đv / Equivalent Circuit



ăă / Pinning

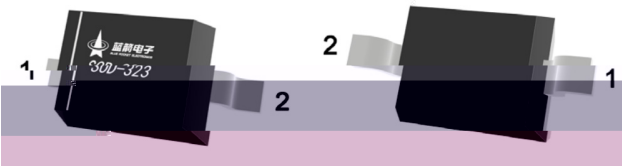

PIN1:Cathode PIN2:Anode

,MV / Marking

•~ăž
See Marking Instructions.




Parameter	Z. Symbol	f Rating	% Unit
Forward Voltage (Note 2) $I_F=10\text{mA}$	V_F	0.9	V
Power Dissipation(Note 1)	P_D	200	mW
Typical Thermal Resistance Junction to Ambient(Note 1)	R_{JA}	625	/W
Junction and Storage Temperature Range	T_J, T_{stg}	-65 150	

Type Number	Marking Code	Zener Voltage Range (Note 2)				Maximum Zener Impedance (Note 3)			Maximum Reverse Current	
		$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	I_R	@ V_R
		Nom (V)	Min (V)	Max (V)	mA				A	V
BZT52B2V4S	H0Z	2.4	2.35	2.45	5	94	564	1	45	1
BZT52B2V7S	H1Z	2.7	2.65	2.75	5	94	564	1	18	1
BZT52B3V0S	H2Z	3.0	2.94	3.06	5	89	564	1	9	1
BZT52B3V3S	H3Z	3.3	3.23	3.37	5	89	564	1	4.5	1
BZT52B3V6S	H4Z	3.6	3.53	3.67	5	84	564	1	4.5	1
BZT52B3V9S	H5Z	3.9	3.82	3.96	5	84	564	1	2.7	1
BZT52B4V3S	H6Z	4.3	4.21	4.39	5	84	564	1	2.7	1
BZT52B4V7S	H7Z	4.7	4.61	4.79	5	75	564	1	2.7	2
BZT52B5V1S	H8Z	5.1	5.00	5.20	5	56	470	1	1.8	2
BZT52B5V6S	H9Z	5.6	5.49	5.71	5	27	451	1	0.9	2
BZT52B6V2S	HAZ	6.2	6.08	6.32	5	9	376	1	2.7	4
BZT52B6V8S	HBZ	6.8	6.66	6.94	5	14	141	1	1.8	4
BZT52B7V5S	HCZ	7.5	7.35	7.65	5	14	75	1	0.9	5
BZT52B8V2S	HDZ	8.2	8.04	8.36	5	14	75	1	0.63	5
BZT52B9V1S	HEZ	9.1	8.92	9.28	5	14	94	1	0.45	6
BZT52B10S	HFZ	10	9.80	10.20	5	18	141	1	0.18	7
BZT52B11S	HGZ	11	10.78	11.22	5	18	141	1	0.09	8


Notes:




/ Electrical Characteristic Curve

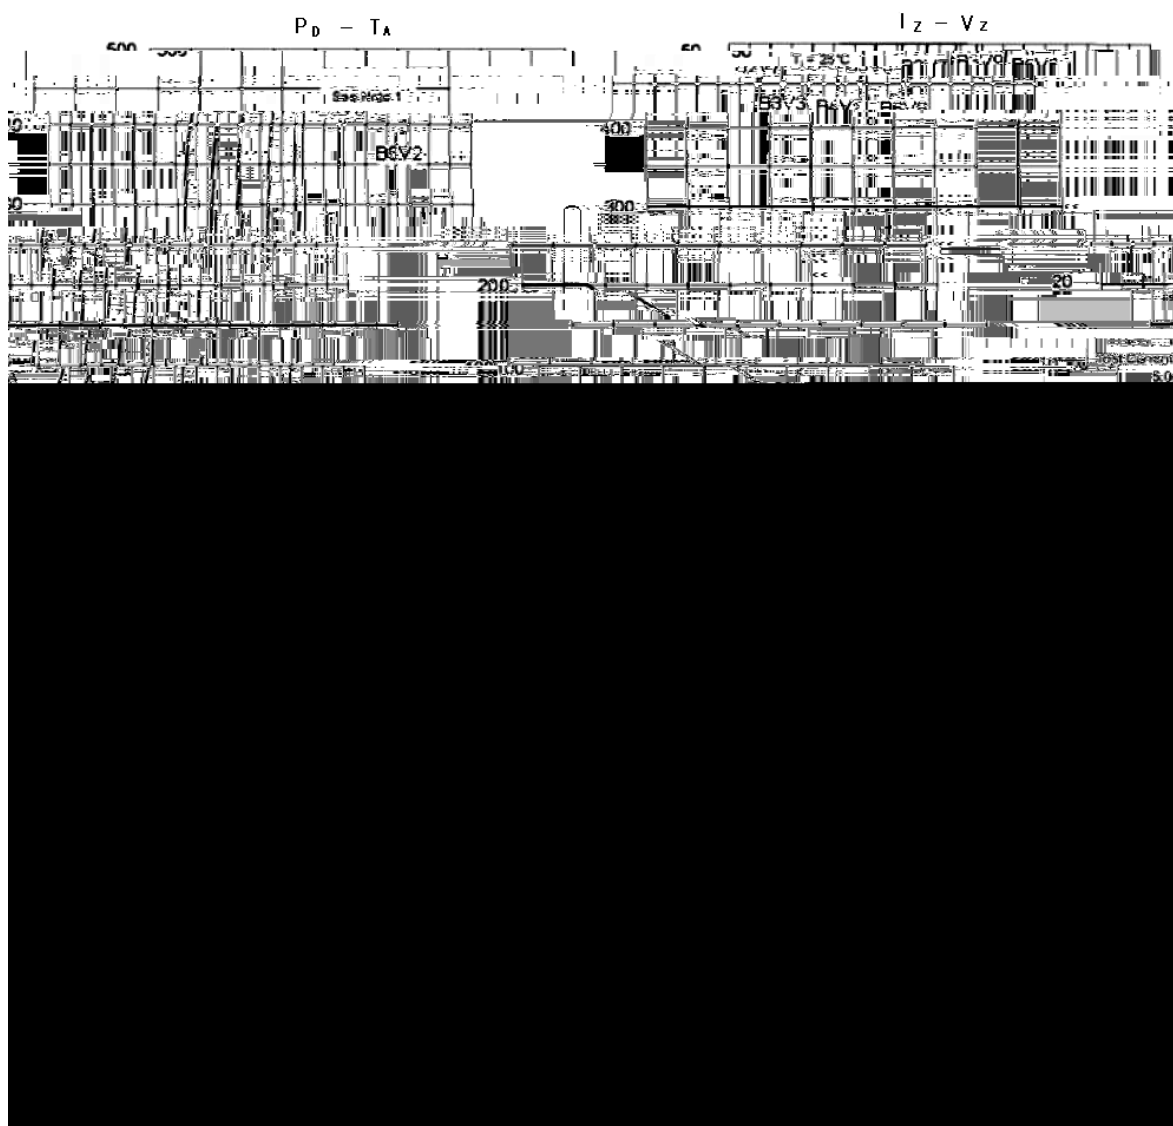

② / Package Dimensions

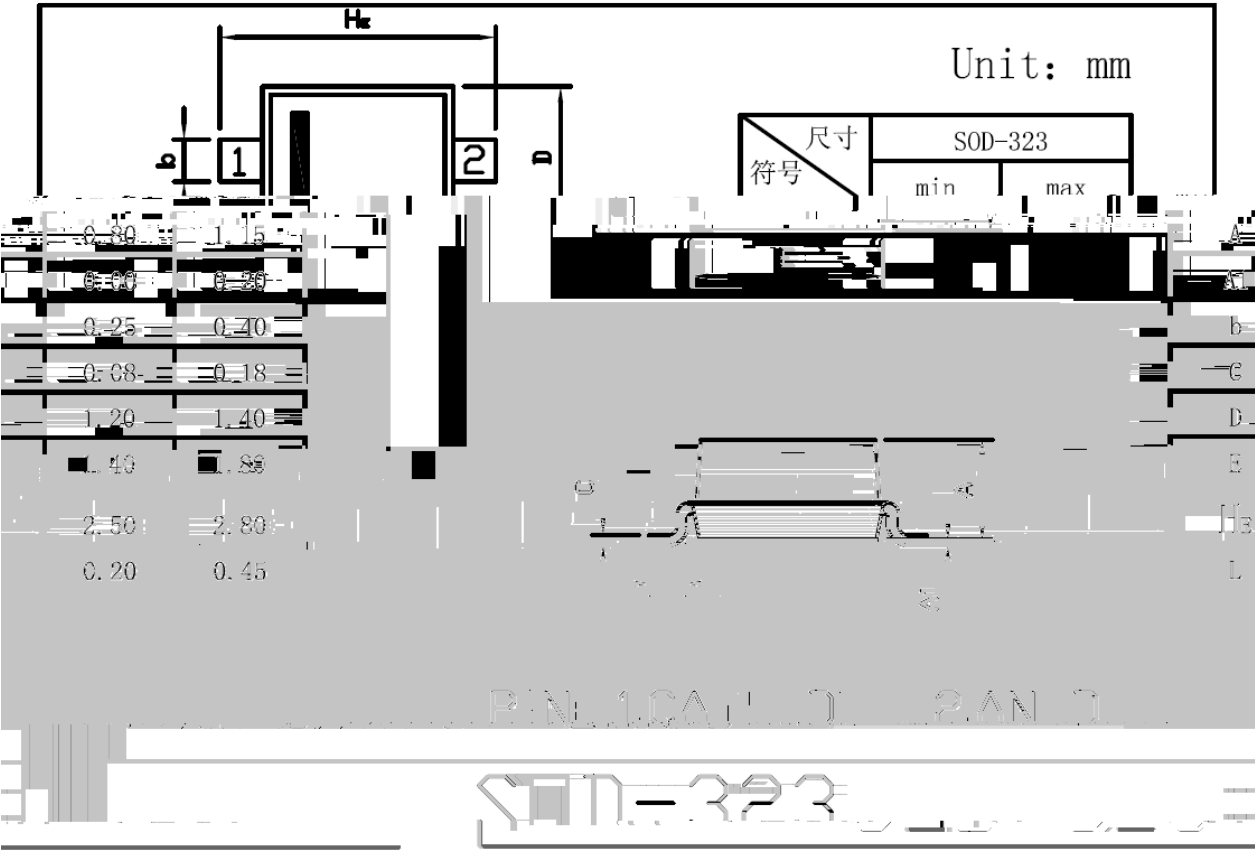

,Myf / Marking Instructions

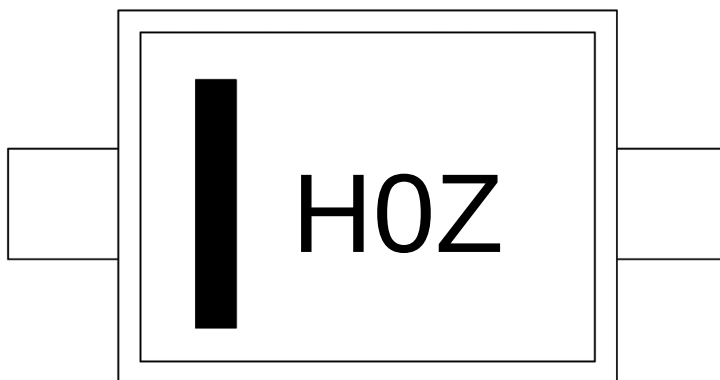

④

.y WA


@y ZWA

Note:

H: Company Code

0Z: Product Type Code

5VDtž. (x/) / 6M2K6X6M/6P6XOM6HXK

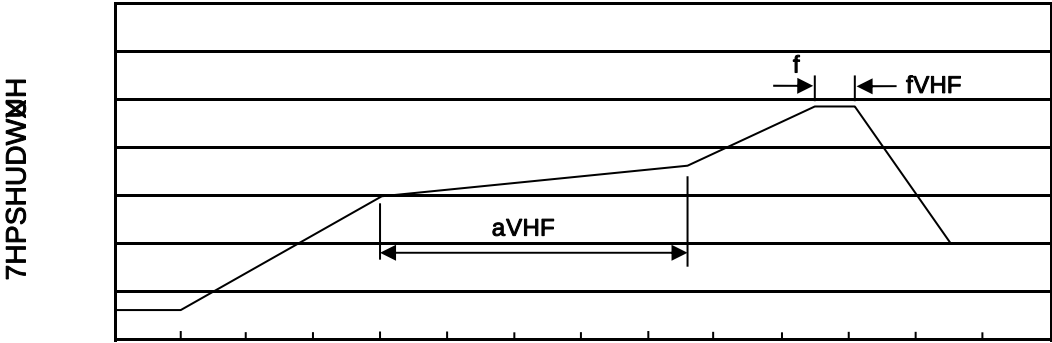

- Note:
- 1.Preheating:150~180- , Time:60~90sec.
 - 2.Peak Temp.:245r 5- , Duration:5r 0.5sec.
 - 3. Cooling Speed: 2~10- /sec.

8/Cpž / Resistance to Soldering Heat Test Conditions

ž 260r 5- ž 10r 1 sec. Temp.:260±5 Time:10±1 sec

GPá / Packaging SPEC.

2& / REEL

Package Type 7ž	Units :ž					Dimension :ž. (unit/Emm ³)		
	Units/Reel /-	Reels/Inner Box - /-	Units/Inner Box /-	Inner Boxes/Outer Box - /ž	Units/Outer Box /ž	Reel	Inner Box -	Outer Box ž
SOD-323	3,000	10	30,000	6	180,000	7s ×8	180×120×180	390×385×205

žf / Notices