

# BZT52CXXXS

Rev.J Oct.-2025

## / Descriptions

SOD-323


Zener Diode in a SOD-323 Plastic Package.

200mW

200mW Power dissipation, medium current, automated assembly processes, HF Product.

) %M\$\* OM

2.4V to 39V wide zener voltage range applications.

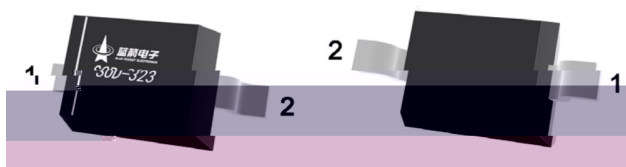

PIN1:Cathode

PIN2:Anode

## / Marking

See Electrical Characteristics.

# BZT52CXXXS

Rev.J Oct.-2025




DATA SHEET

Parameter	Symbol	Rating	Unit
Forward Voltage (Note 2) ( $I_F=10mA$ )	$V_F$	0.9	V
Power Dissipation(Note 1)	$P_D$	200	mW
Typical Thermal Resistance Junction to Ambient(Note 1)	$R_{JA}$	625	/W
Junction and Storage Temperature Range	$T_j, T_{stg}$	-65 150	

**/ Electrical Characteristics(Ta=25 )**

Type Number	Marking Code	Zener Voltage Range (Note 2)				Maximum Zener impedance (Note 3)			Maximum Reverse Current (Note 2)		Typical Temperature Coefficient @IzTC mV/°C		Test Current IzTC
		Vz @IzT			IzT	ZzT @IzT	ZzK @IzK	IzK	IR	@VR	Min	Max	
		Nom (V)	Min (V)	Max (V)	mA	mA			uA	V			
BZT52C11S	HWG	11	10.4	11.6	5	20	150	1	0.1	8	5.4	9	5
BZT52C12S	HWH	12	11.4	12.7	5	25	150	1	0.1	8	6	10	5
BZT52C13S	HWI	13	12.4	14.1	5	30	170	1	0.1	8	7	11	5
BZT52C15S	HWJ	15	13.8	15.6	5	30	200	1	0.1	10.5	9.2	13	5

/ Electrical Characteristic Curve

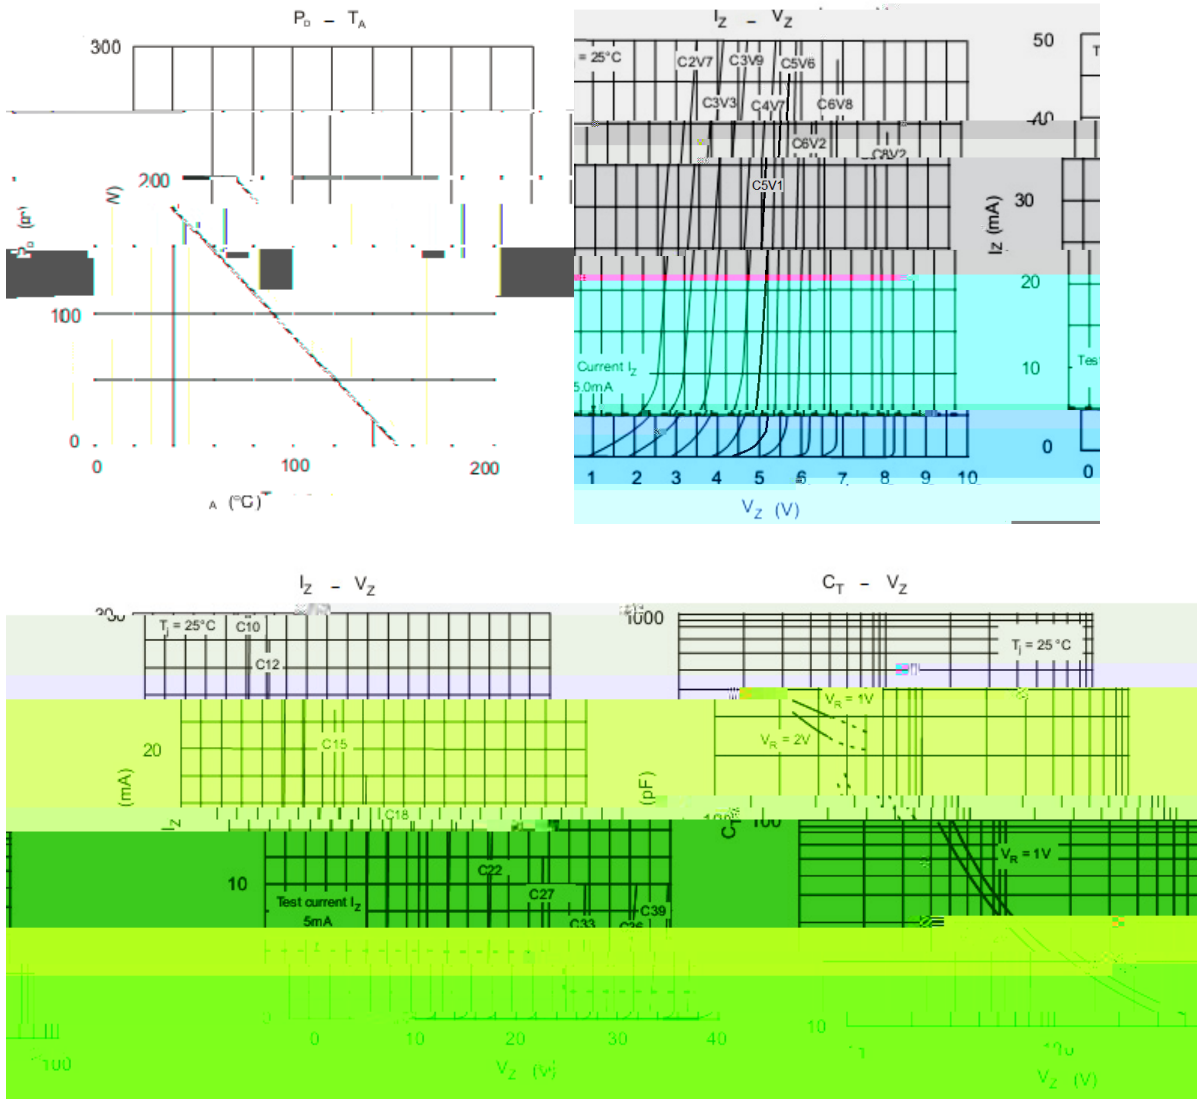


# **BZT52CXXS**

Rev.J Oct.-2025

**DATA SHEET**

**/ Marking Instructions**

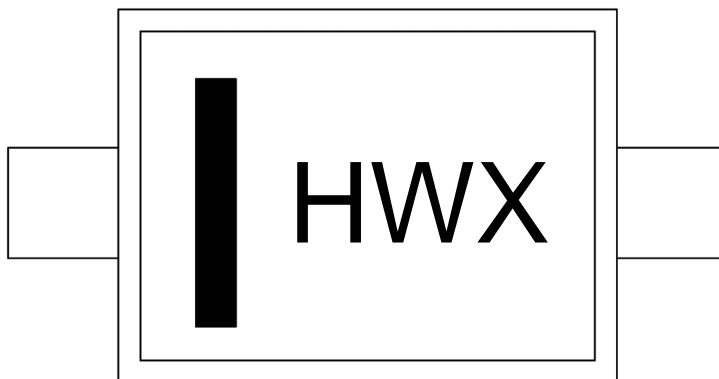

?

N O

Note:

H: Company Code

WX: Product Type Code

**BZT52CXXXS**

Rev.J Oct.-2025



**蓝箭电子**  
BLUE ROCKET ELECTRONICS

**DATA SHEET**

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

