


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ


/ Electrical Characteristic Curve

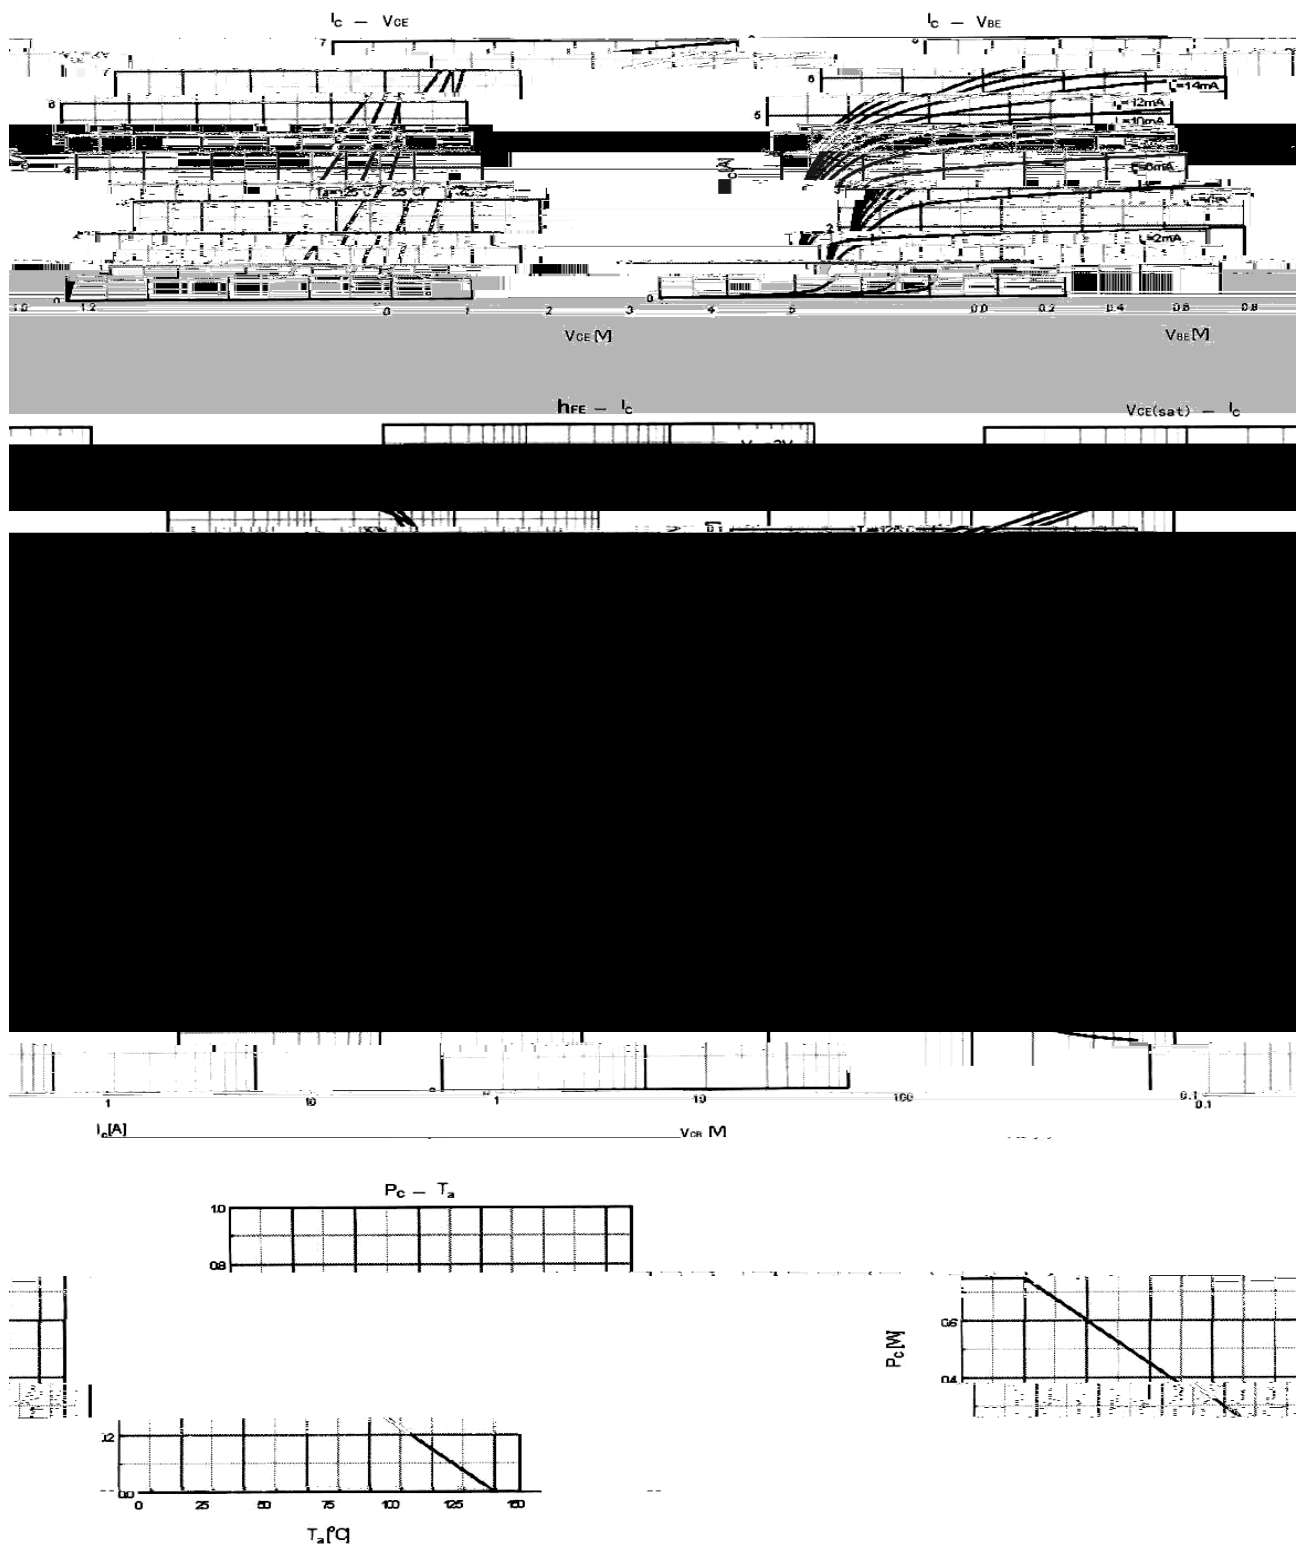


/ Package Dimensions

TO-92

Unit: mm

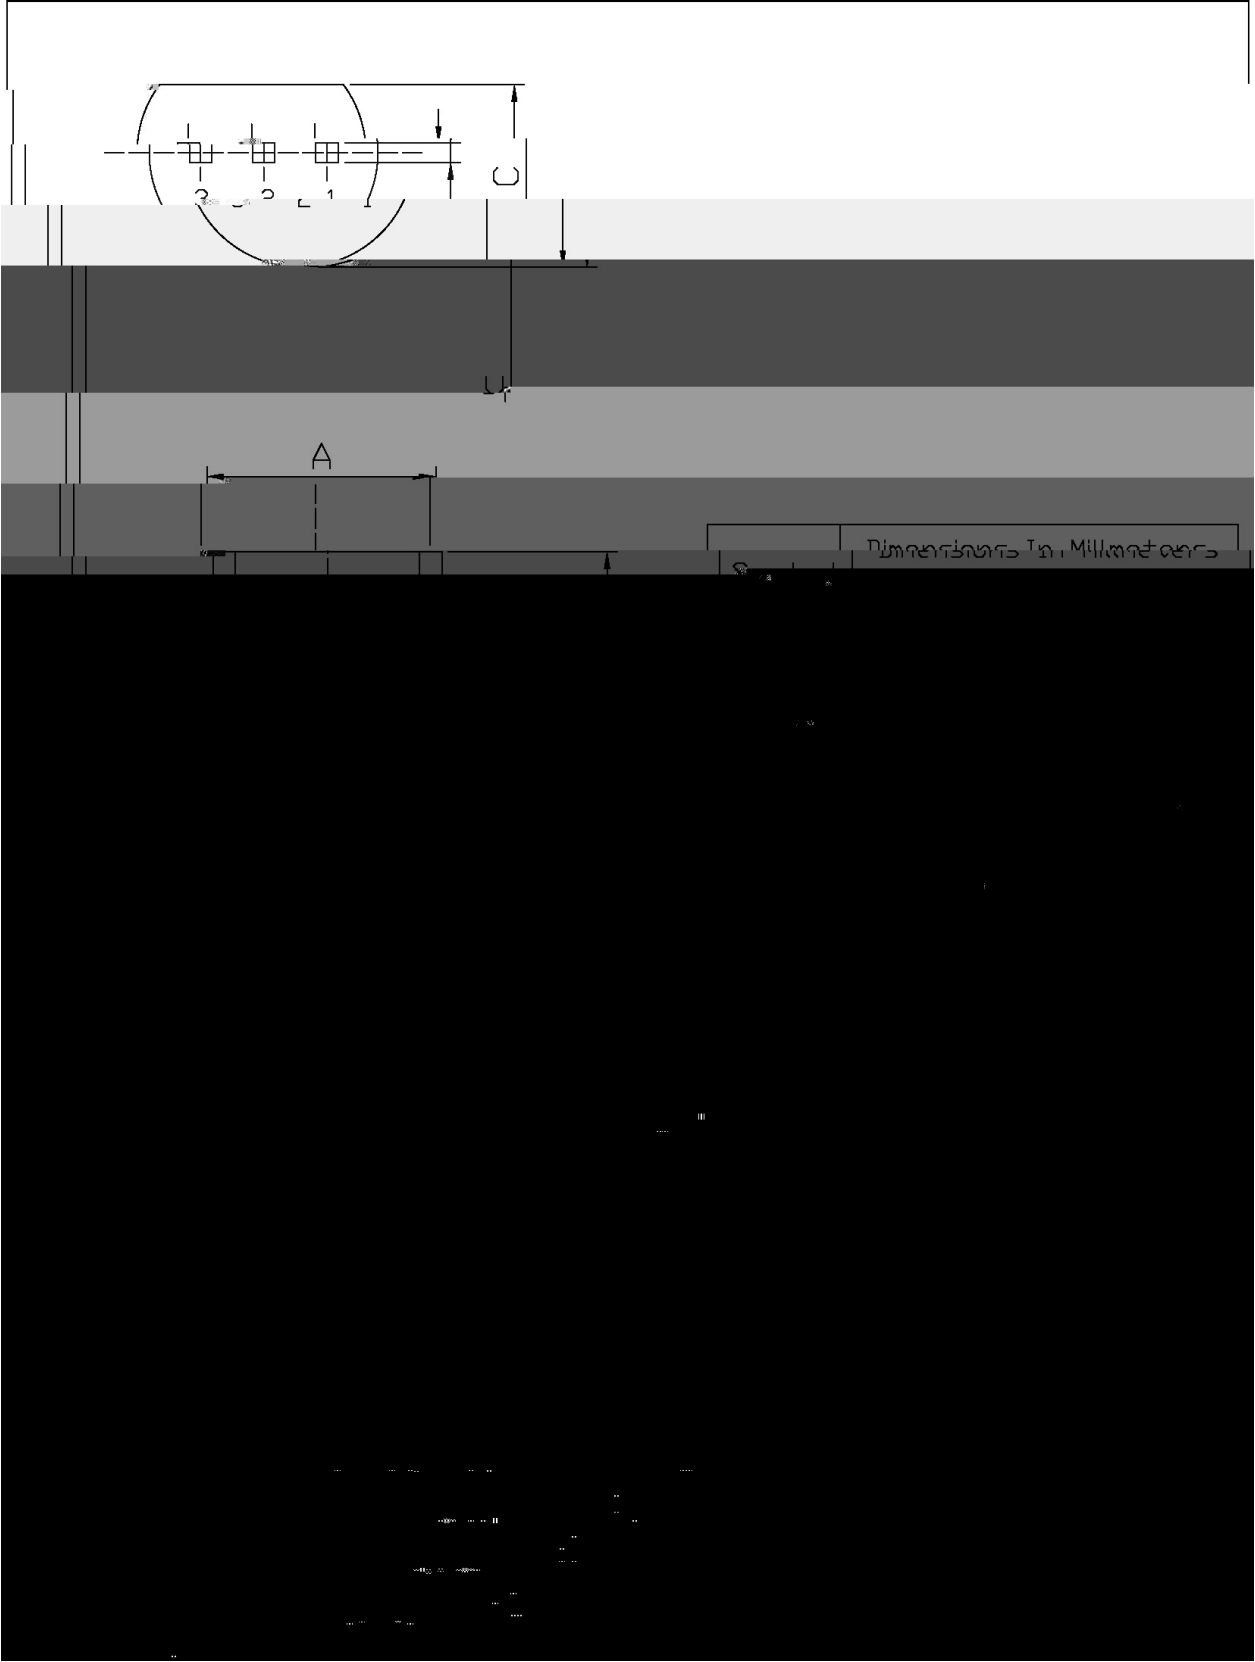


/ Marking Instructions

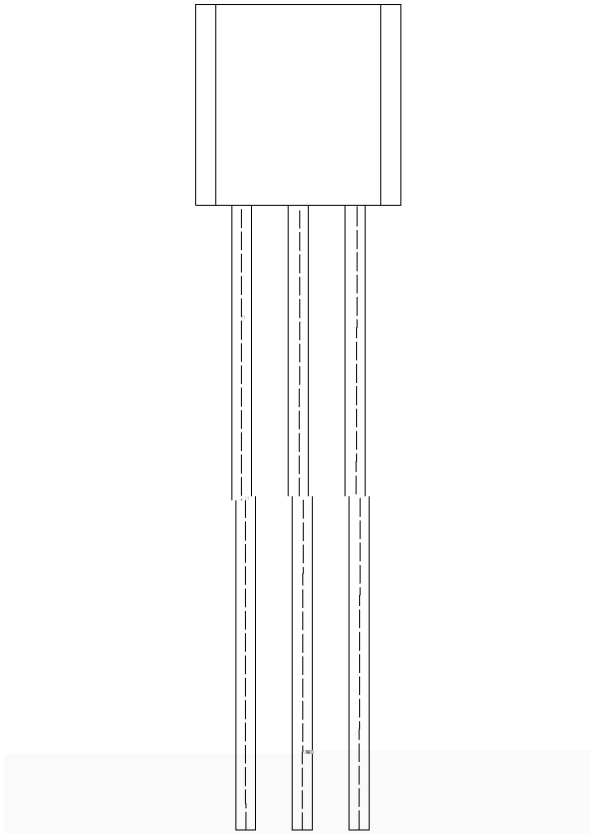

EU:

M

() / Temperature Profile for Dip Soldering(Pb-Free)

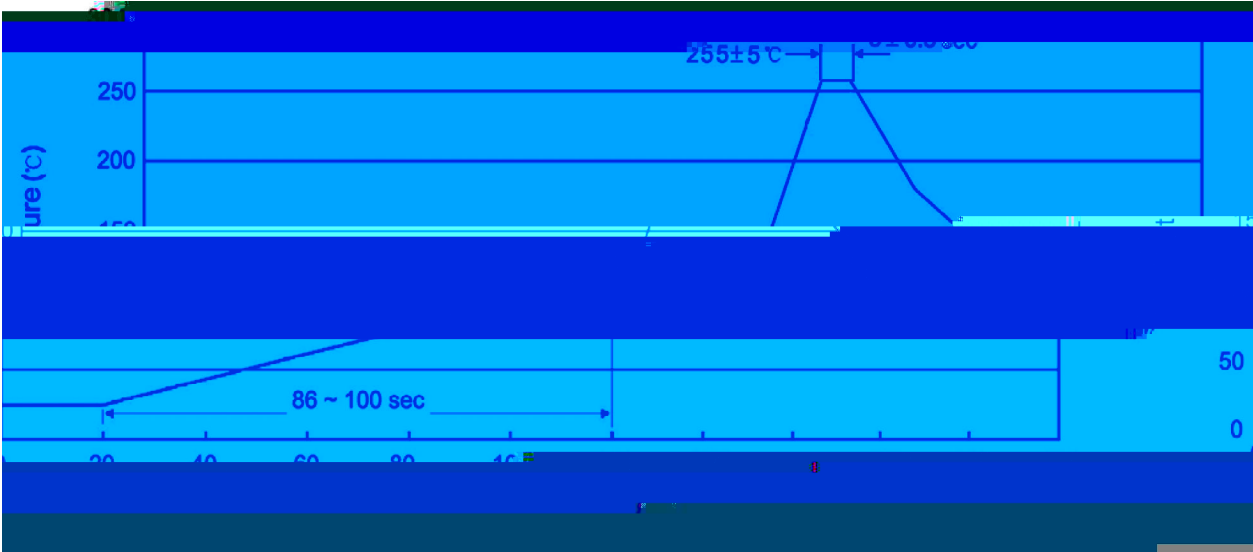

$\frac{3}{8}$ $\frac{3}{8}$
2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2

/ Packaging SPEC.