

GBJ35005~GBJ3510

Rev.A .Jul.-2018



DATA SHEET

50~1000V


35 A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:35

10

Parameter	Symbol	GBJ	Rating	Unit
-----------	--------	-----	--------	------


/ Electrical Characteristic Curve

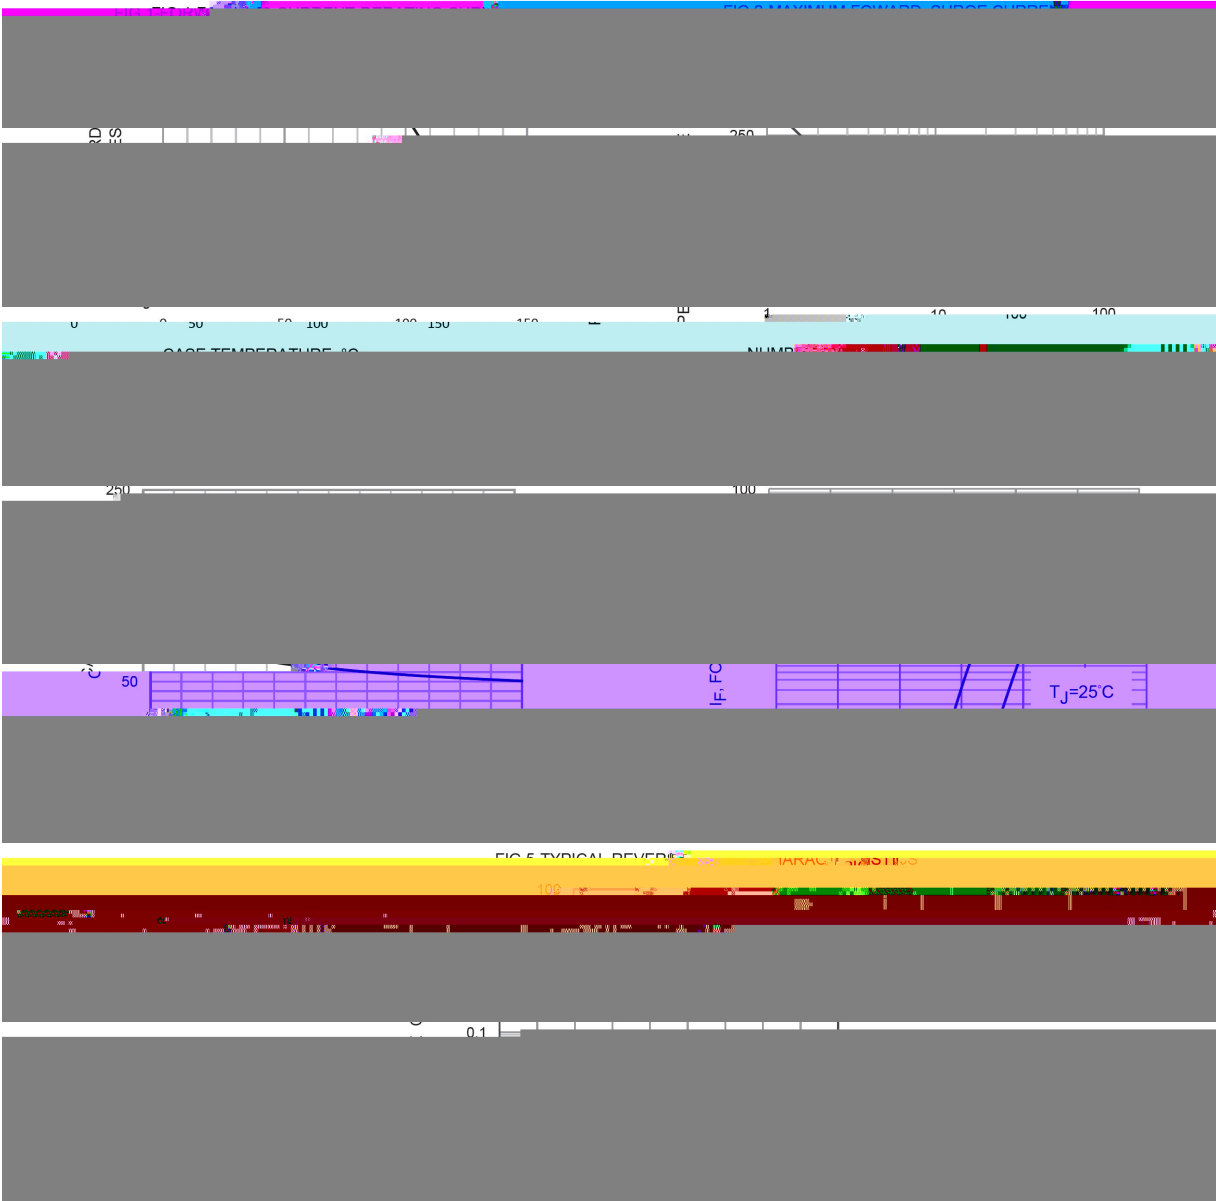

/ Package Dimensions



/ Marking Instructions

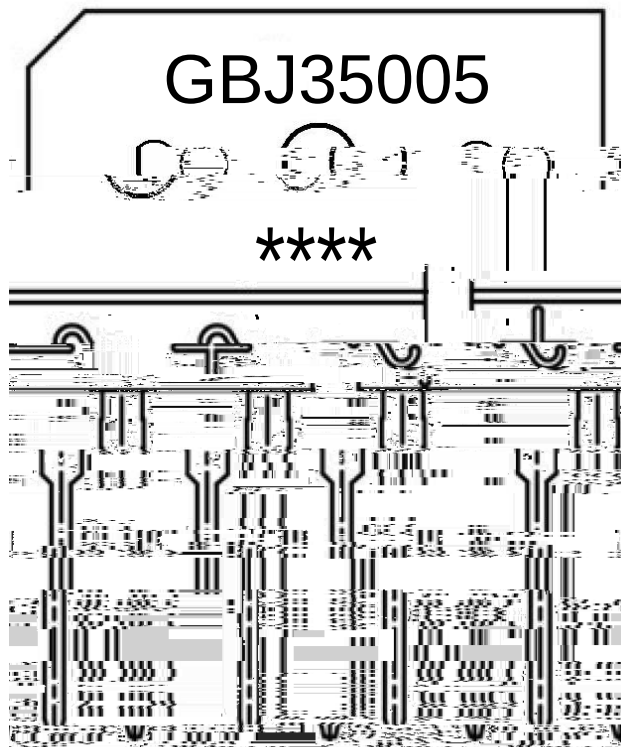


GBJ35005

Note:

GBJ35005: Product Type.

****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

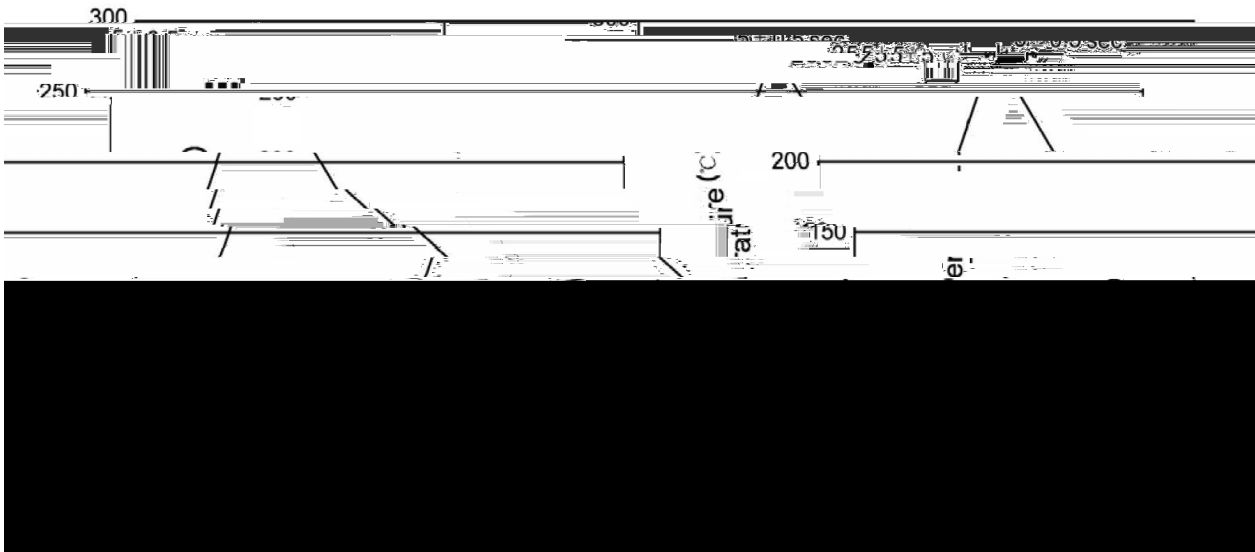

- 1

25 150

60 90sec;

2

255±5

5±0.5sec;

3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5

10±1 sec.

Temp.:270±5℃

Time:10±1 sec

/ Packaging SPEC.

/ BULK