



KTA1273T
Rev.E Mar.-2016

SOT-89 PNP




Parameter	Symbol	Rating	Unit
Collector to Base Voltage			

/ Electrical Characteristic Curve

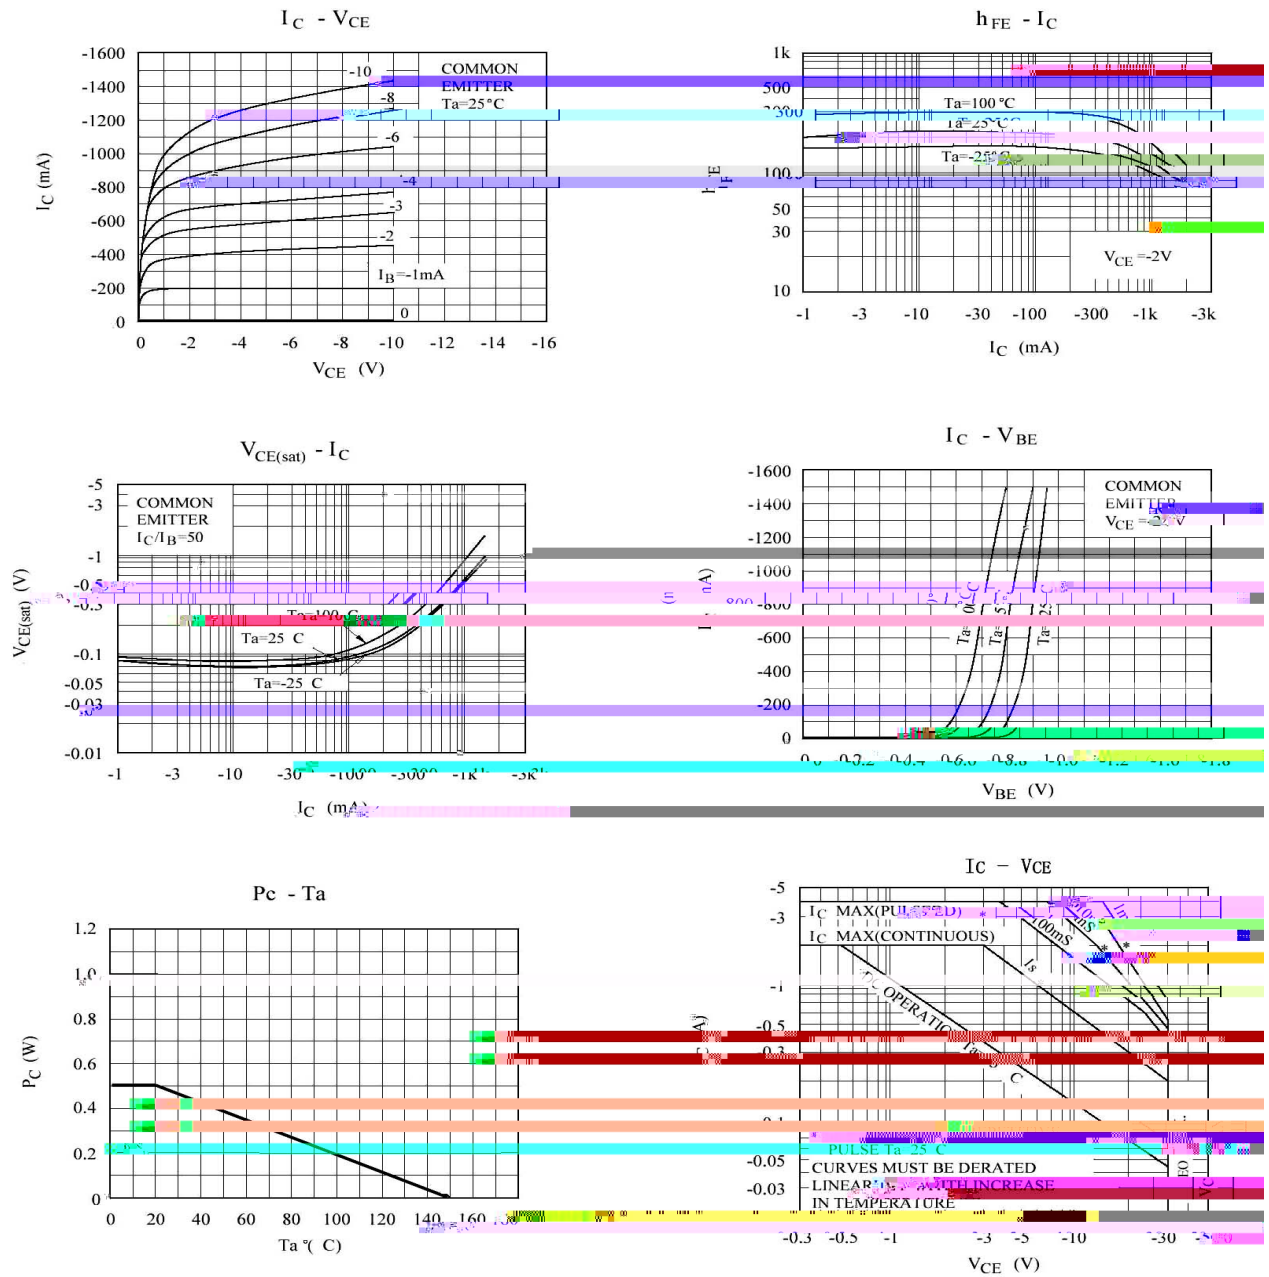

KTA1273T

/ Marking Instructions

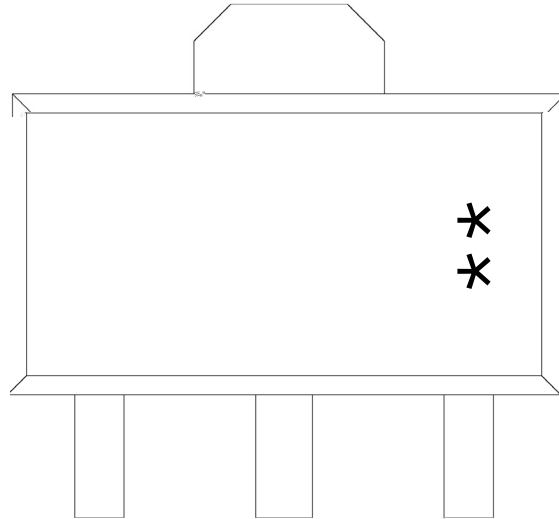

H

P3

O h_{FE}

**

Note:


H: Company Code.

P3: Product Type.

O h_{FE} Classifications Symbol

**: Lot No. Code, code change with Lot No.

() / K\d g\iXk i\`Gif]`d]fi @ `l \]f n Jf d \i e^ZGY\$-i\`z

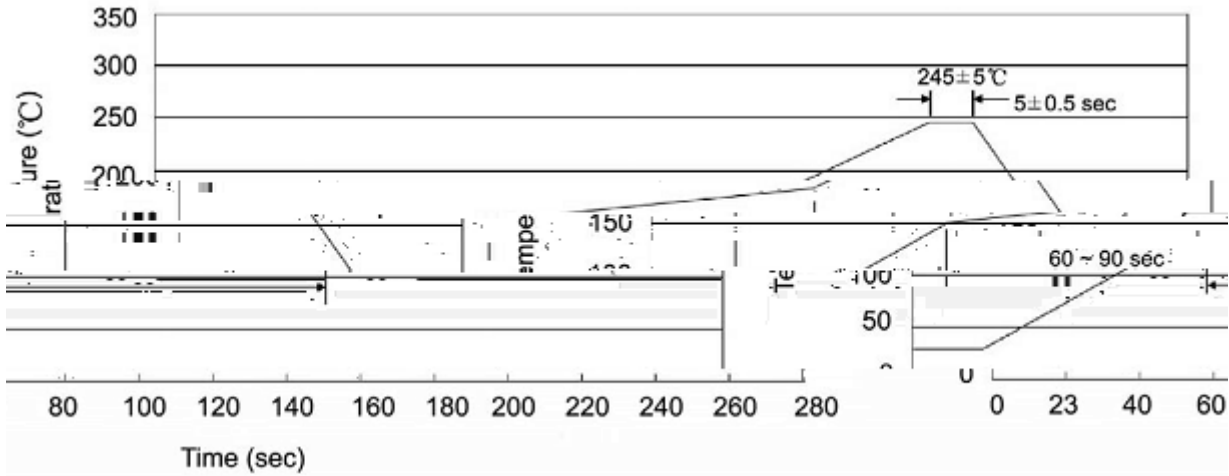

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封	Units 包 量					Dimension 包 尺寸 (unit: mm ³)		
	Units/Reel /卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box /盒	Inner Boxes/Outer Box 盒/	Units/Outer Box /	Reel	Inner Box 盒	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices