

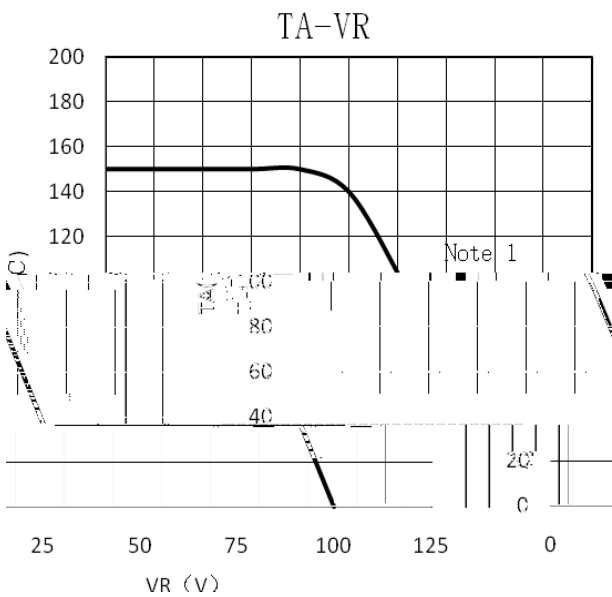
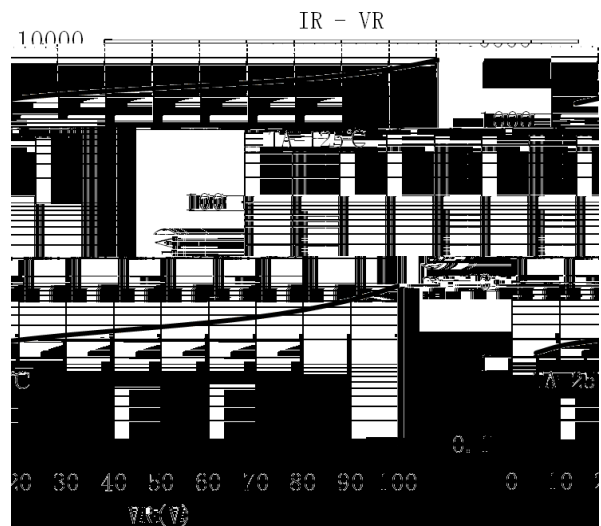
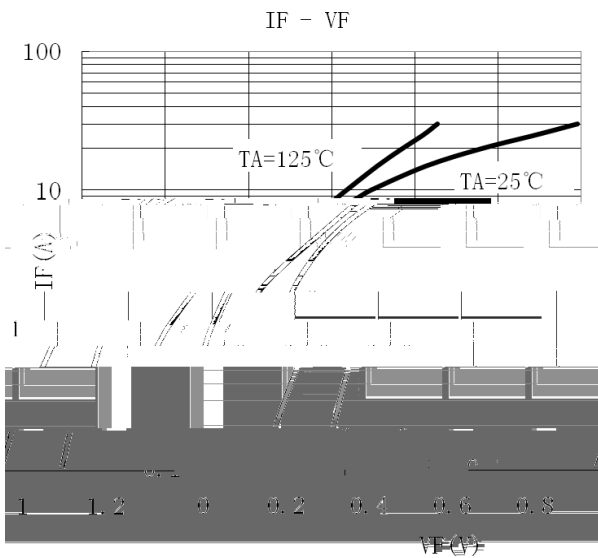
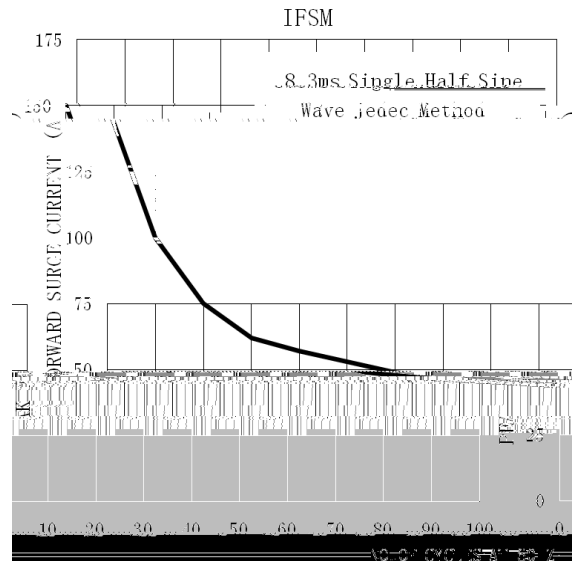


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage			
Working Peak Reverse Voltage			
DC Blocking Voltage			


/ Electrical Characteristic Curve

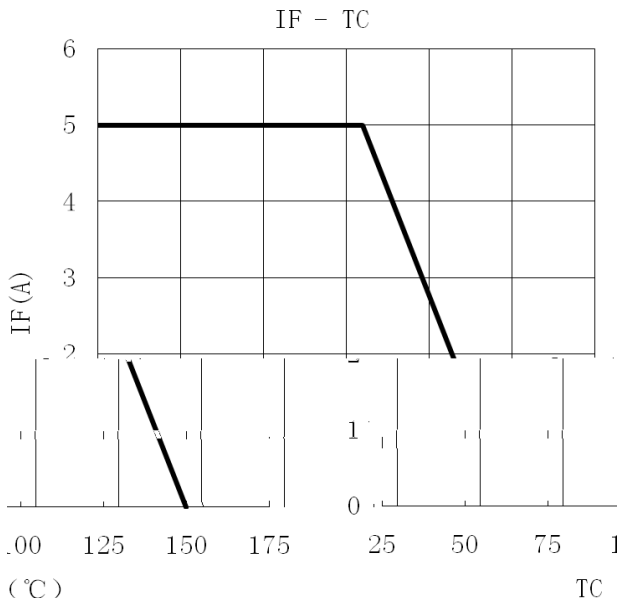

/ Package Dimensions

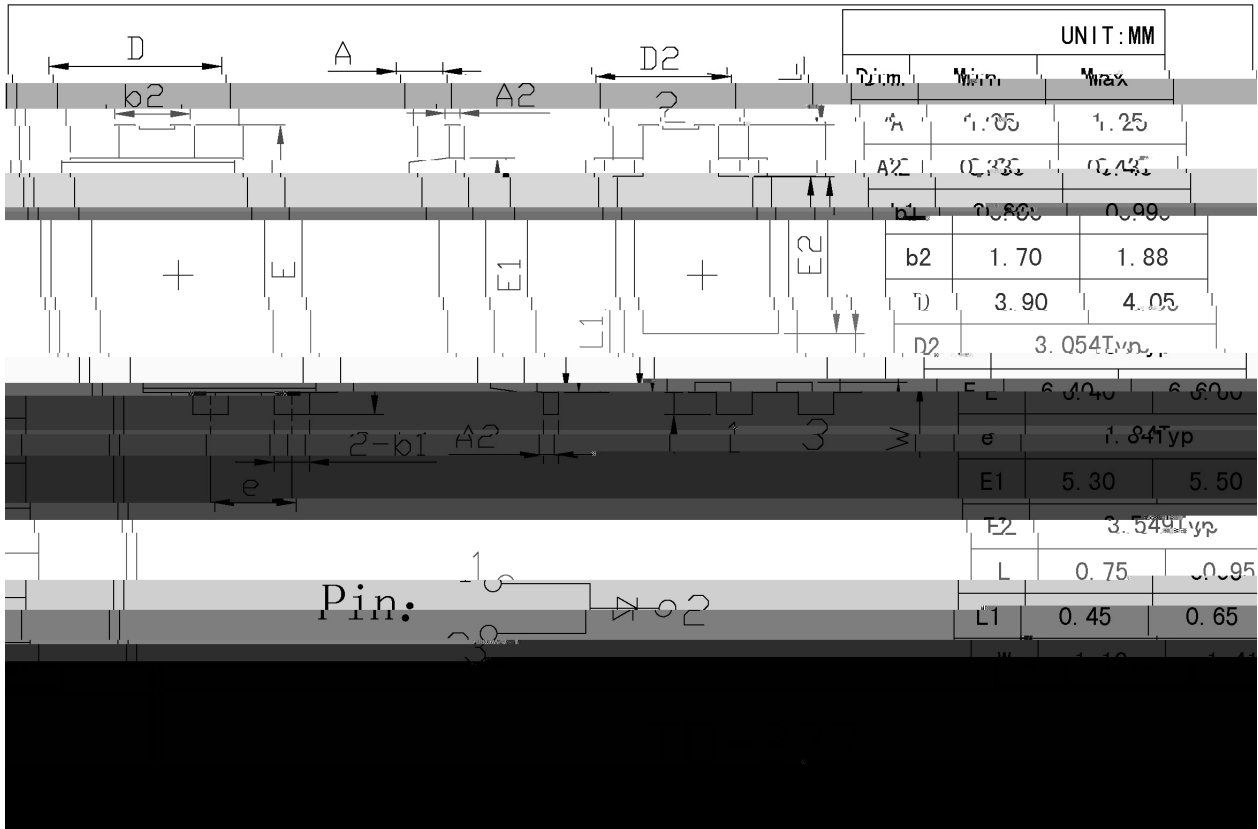

() / Resistance to Soldering Heat Test Conditions

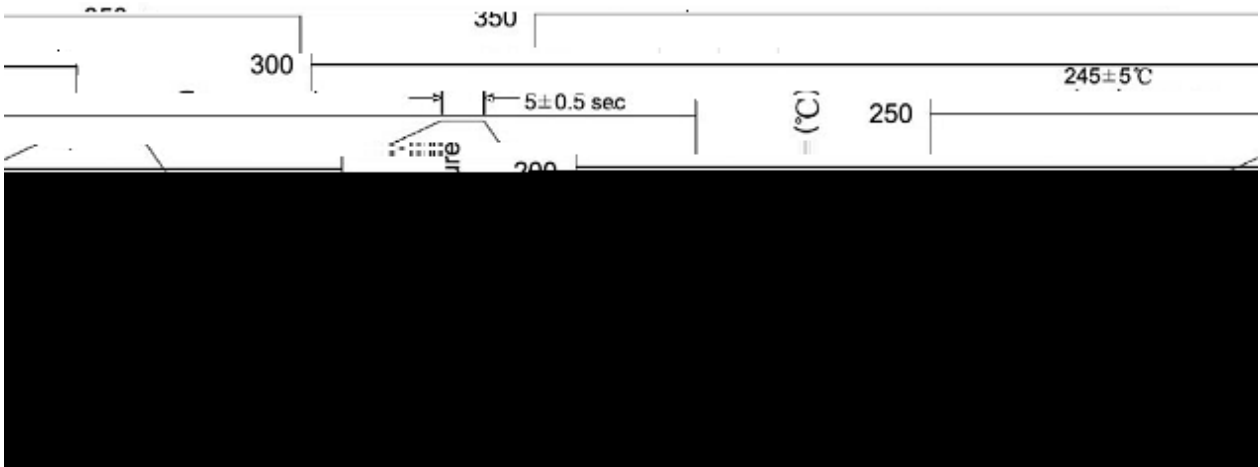

Note:

- | | | | | | |
|---|----|-------|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | | 245±5 | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units			Dimension	(unit mm ³)
	Units/Reel	Reels/Inner Box	Units/Inner Box		