





50V ~ 1000V

1.0A SMA



---


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------






4 5 6 7 3 / Package Dimensions

SMA

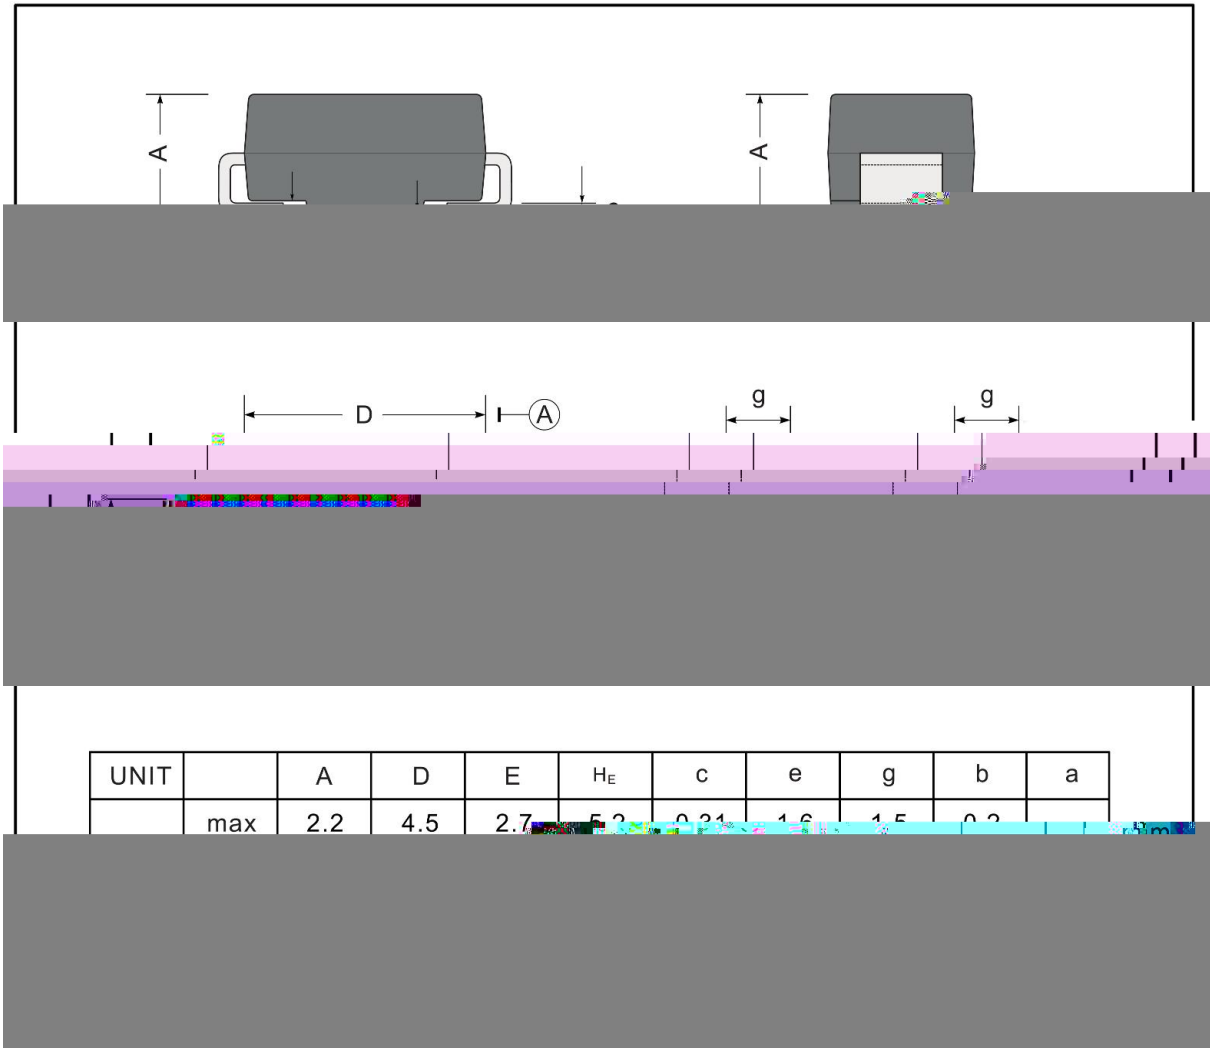



# Marking

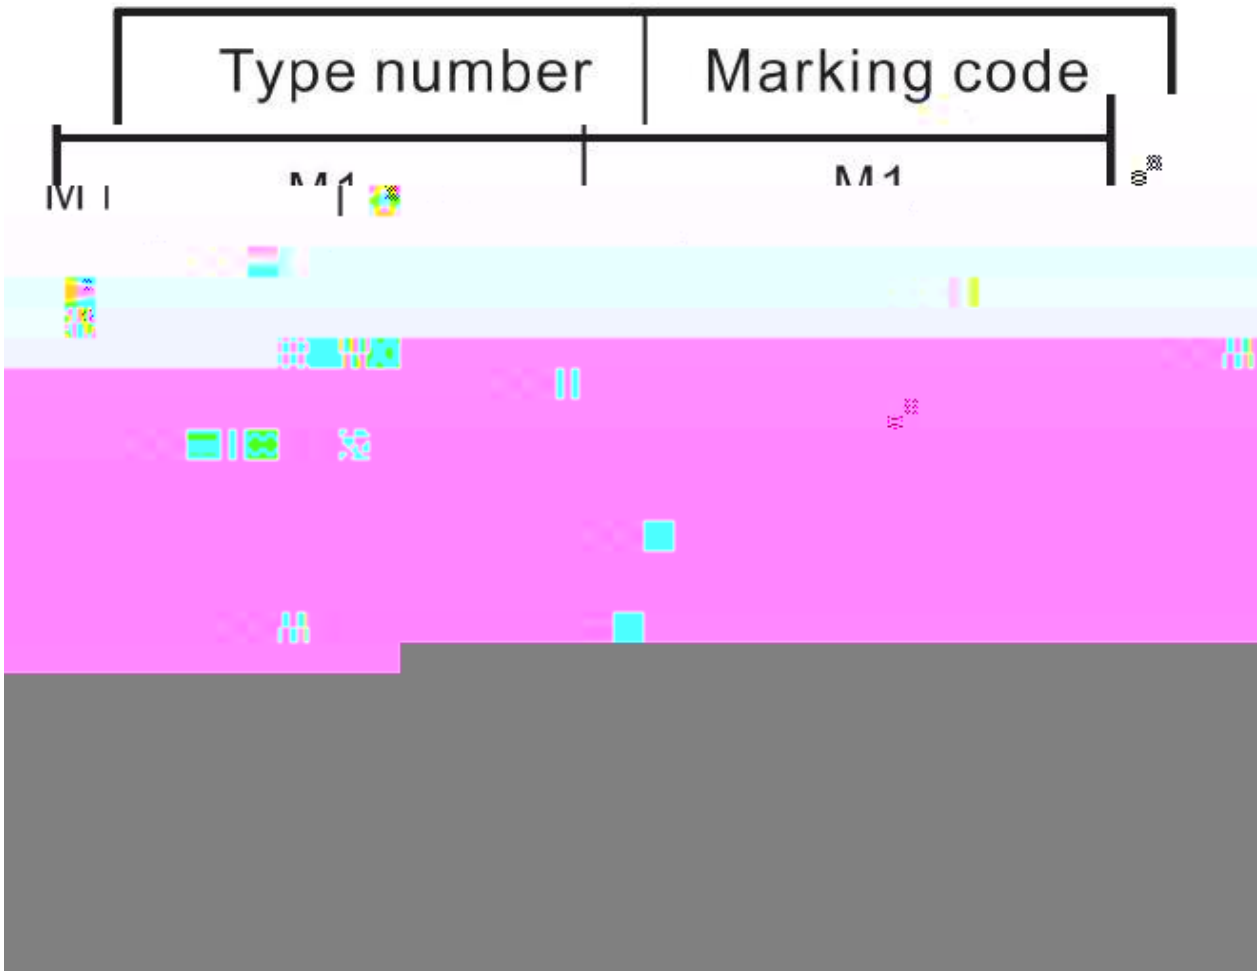





< = > ? @ 1 2 3 (A B) / CDE FDGH I J K L M N O P Q R S T U V W X Y Z [ \ ] ^ \_ ` a b /


Note:

- |   |         |           |  |
|---|---------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec.   |
| 2 | 245±5   | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2       | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec.            |

\ > ] ^ \_ ` a b / Resistance to Soldering Heat Test Conditions

260±5°C                      10±1 sec.                      Temp.:260±5°C                      Time:10±1 sec

c d e f / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱