

/ Descriptions

1A MBF
1A Surface Mount Glass Passivated Bridge Rectifier, MBF thin package.


/ Features

50V~1000V 1A
RoHS
Glass Passivated Chip Junction, Reverse Voltage:50to1000V, Forward Current:1 A, High Surge Current Capability, Low Forward Voltage Drop, Lead and body according with RoHS standard, Halogen free product.


/ Applications

General purpose.

/ Equivalent Circuit



/ Pinning

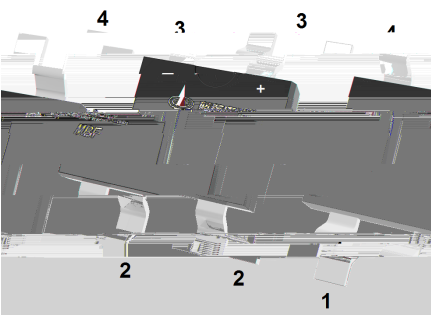

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

/ Marking


See Marking Instructions.

5F10-34~MB10F1

ov.-2025

Parameter	Rating						Unit
	MB1F 10-34	MB2F 10-34	MB4F 10-34	MB6F 10-34	MB8F 10-34	MB10F 10-34	
m Recurrent Peak Voltage	100	200	400	600	800	1000	V
m RMS Voltage	70	140	280	420	560	700	V
m DC Blocking	100	200	400	600	800	1000	V
m Average Forward Current (Note 1)	1						A
Forward Surge Current Single Half Sine-Wave Imposed on Rated (DEC Method)	30						A
I ² t Rating for Fusing(t<8.3ms)	3.7						A ²²

/ Electrical Characteristic Curve

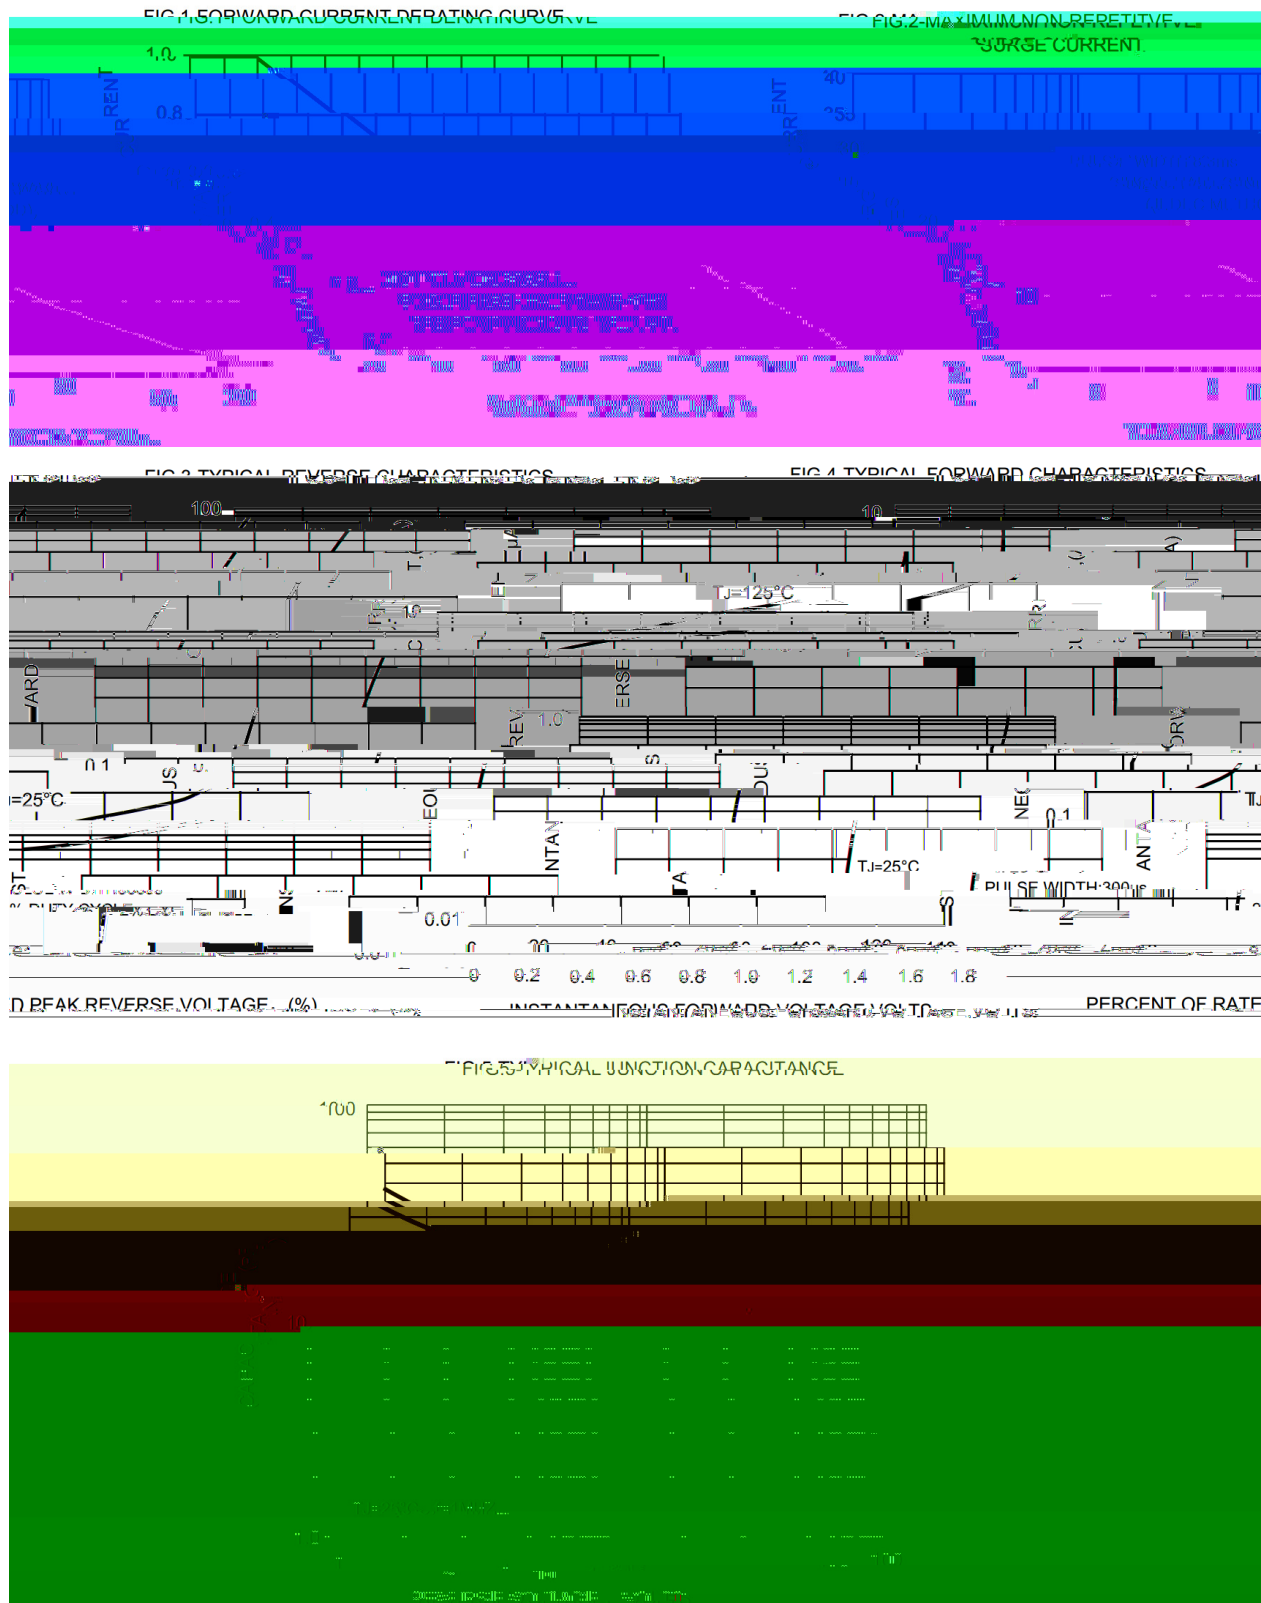

MB05F10-34~MB10F10-34

Rev.A Nov.-2025



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Marking Instructions



MB05F

Note:

MB05F

Product Type Code

Lot No. Code, code change with Lot No.

Marking

Type number	Marking code
MB05F10-34	MB05F
MB1F10-34	MB1F
MB2F10-34	MB2F
MB4F10-34	MB4F
MB6F10-34	MB6F
MB8F10-34	MB8F
MB10F10-34	MB10F

šWD t... •Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

^ačy

Note:

10• Ä ½ “ † 150 ½180 - k Ž • 60 ½