


!"#\$% #!"#\$
Rev.E Jan.-202



0.5A MBF
0.5A Surface Mount Glass Passivated Bridge Rectifier, MBF thin package。
&

100V~1000V 0.5A

Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current: 0.5A, High Surge
Current Capability, Designed for Surface Mount Application, Halogen free product.
&

General purpose.=

& &


!

5.2145 420




& & . & & C96:9<0&'2G0;327;3&

MBF

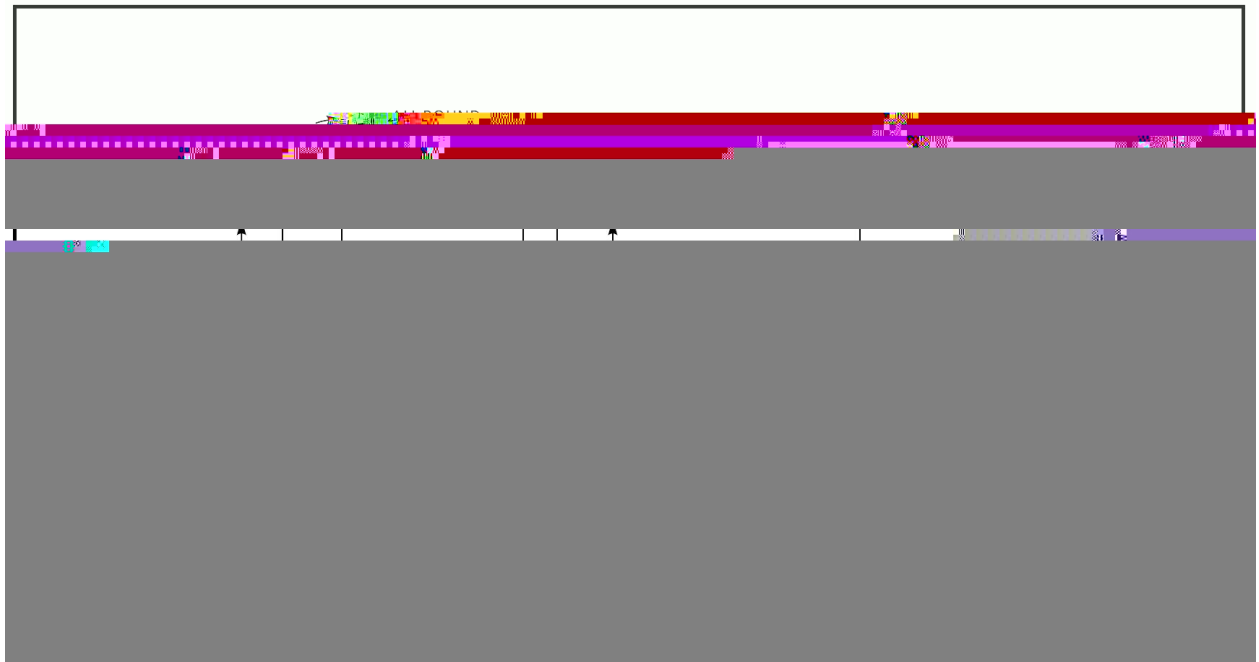


MB5 mechanical data






& & . & & 95:2; < & N ; 3 > 5 ? 6 > 27 ; 3 &

Marking

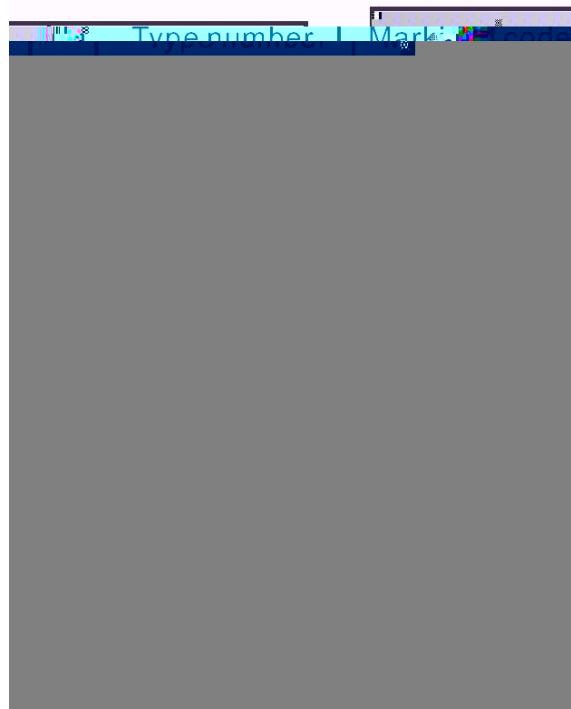



& &

