


Rev.E Jan.-2021


D	2017-5				
E	2021-1-27	4/7	0.5-0.8	e0.5-0.7 5 7	



Rev.E Jan.-2021

0.8A

MBF



Rev.E Jan.-2021

Parameter	Symbol	Rating						Unit
		MB1F	MB2F	MB4F	MB6F	MB8F	MB10F	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	70	140	280	420	560	700	V

070S


1/

Rev.E Jan.-2021



MBF




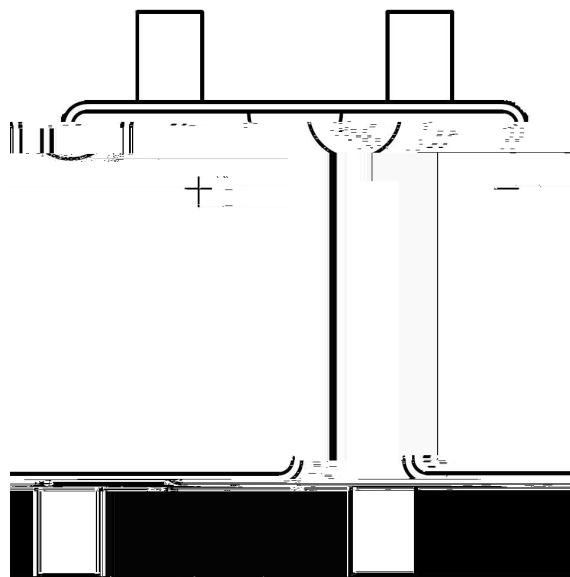

MB1F



Temperature Profile for IR Reflow Soldering(Pb-Free)

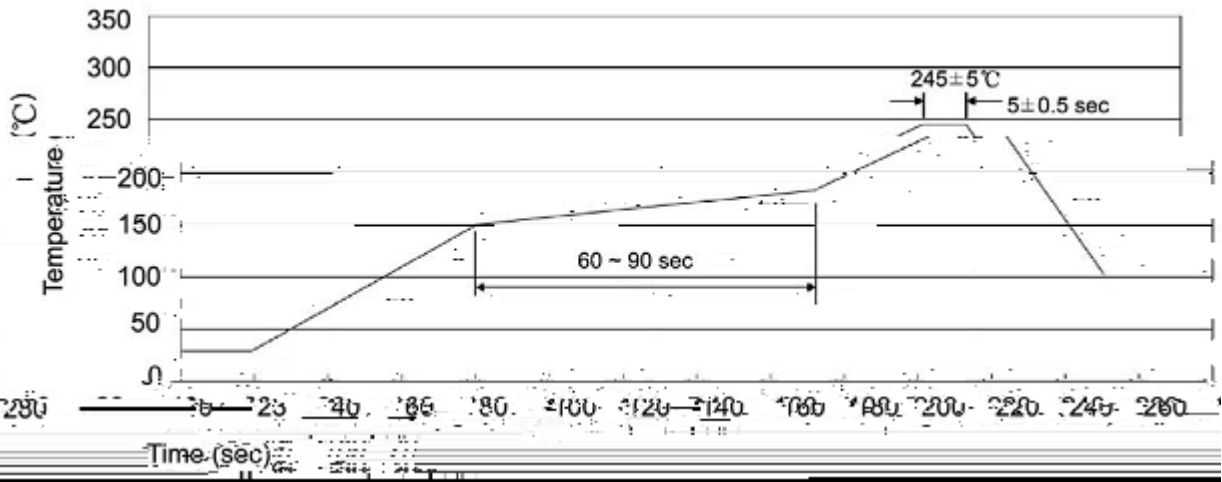

Note:

- | | | | | | |
|---|-------|-----|----|-----------|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | |