


MB1M~MB10M
Rev.D May.-2017

DATA SHEET

/ Electrical Characteristic Curve

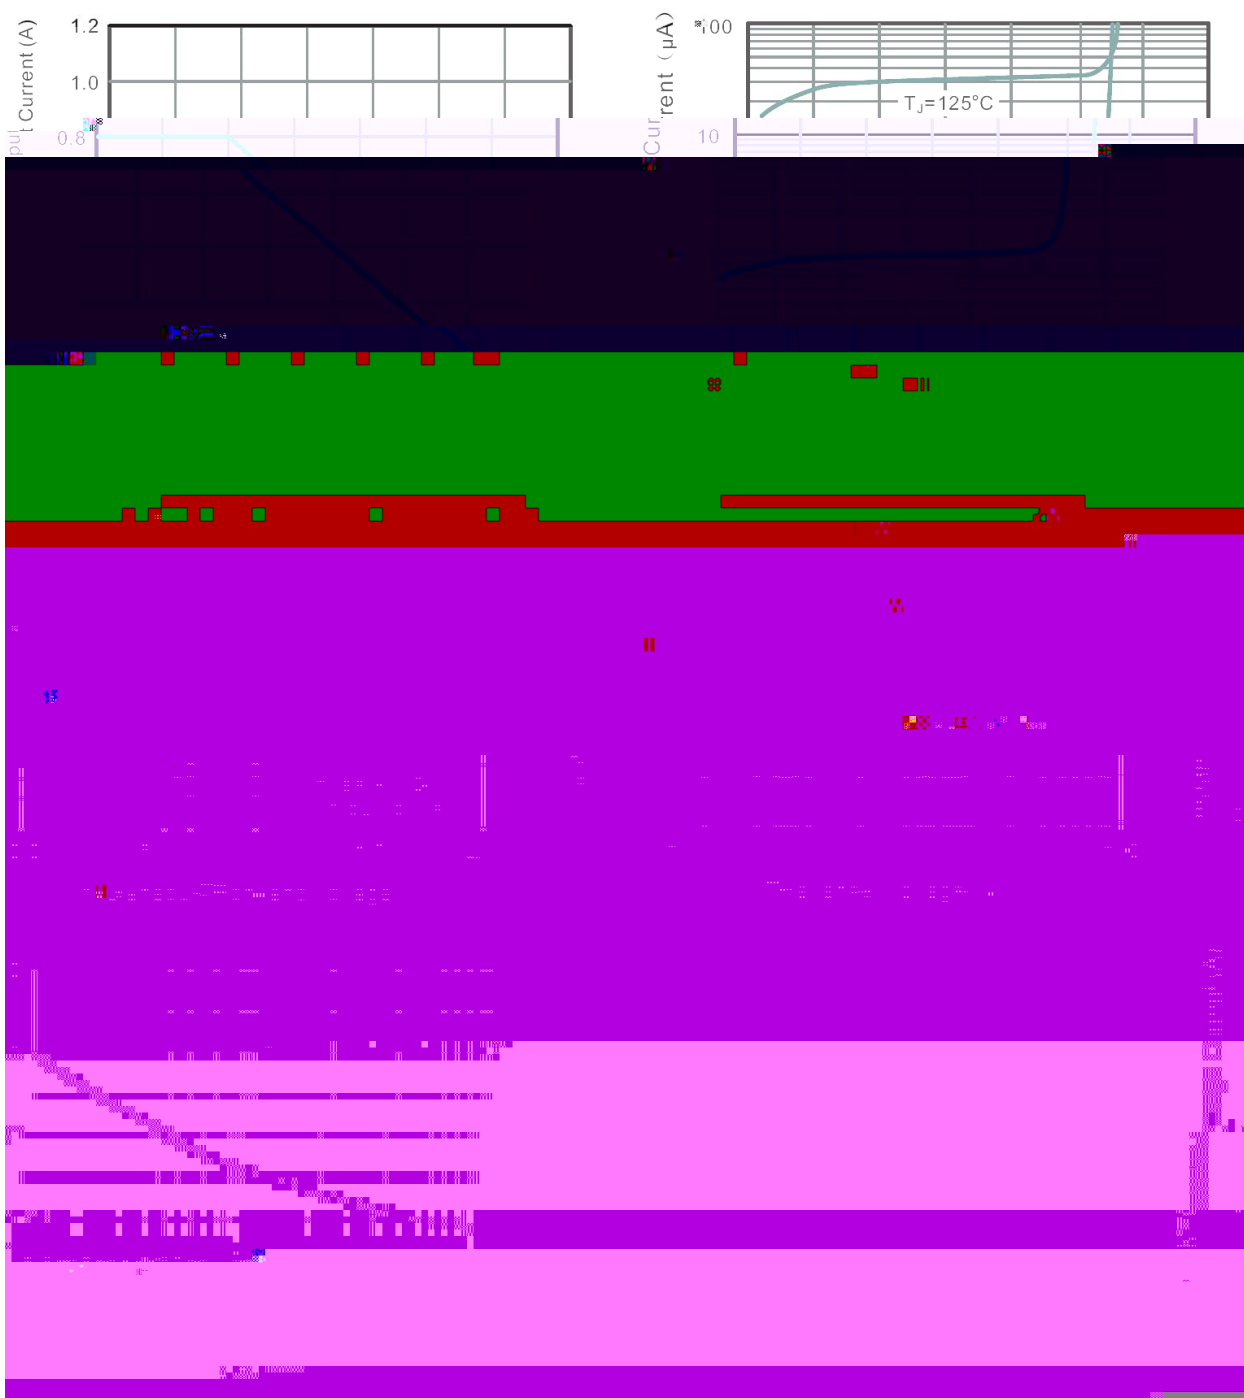


/ Marking Instructions

Marking

Type number	Marking code
MB1M	MB1M
MB2M	MB2M
MB4M	MB4M
MB6M	MB6M
MB8M	MB8M
MB10M	MB10M

/ Marking Instructions



MB1M

1 *


3 *

Note:

MB1M Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

() / Temperature Profile for Dip Soldering(Pb-Free)

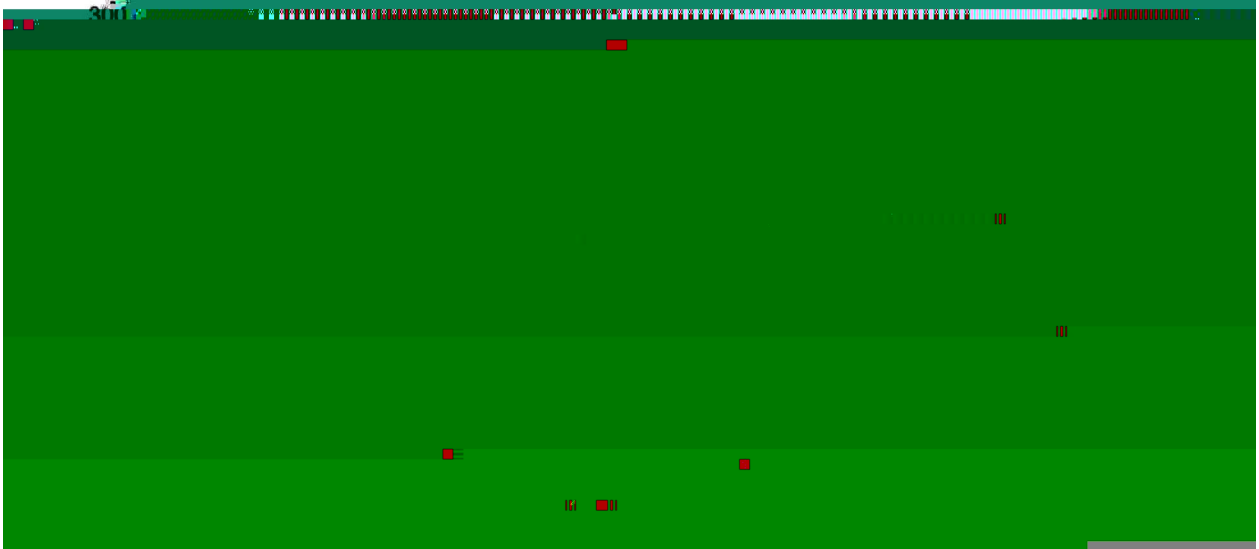

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	100	50	5000	4	20000			

/ Notices