

Rev.A May.-2019

1.2A

MBS



1.2A Surface Mount Glass Passivated Bridge Rectifier, MBS package.

100V ~ 1000V


1.2A

Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current:1.2A, High Surge Current Capability, Designed for Surface Mount Application.Halogen free product.

General purpose.



PIN	DESCRIPTION
1	Input Pin (-)
2	Input Pin (+)
3	Output Anode (+)
4	Output Cathode (-)

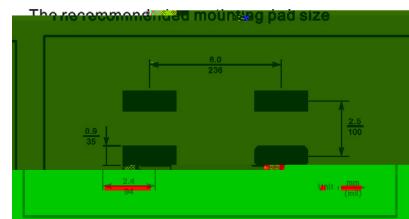

See Marking Instructions.

Parameter	Symbol	Rating						Unit
		MB1S-12	MB2S-12	MB4S-12	MB6S-12	MB8S-12	MB10S-12	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_a = 125$	$I_F$	1.2						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	40						A
Typical Junction Capacitance <small>Note1</small>	$C_j$	18						pF
Typical Thermal Resistance <small>Note2</small>	$R_{\theta JA}$	75						/W
Typical Thermal Resistance <small>Note2</small>	$R_{\theta JL}$	25						/W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55~+150						

Note:


1. Measured at 1MHz and applied reverse voltage of 4 V D.C.
2. Mounted on glass epoxy PC board with 4× 1.5"× 1.5" 3.81× 3.81 cm copper pad.


Parameter	Symbol	Test condition	Rating	Unit
Maximum Forward Voltage	$V_F$	$I_F=1.2A$	1.1	V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	$I_R$	$T_a=25$ $T_a=125$	5.0 80	$\mu A$


Rev.A May.-2019

---

MBS

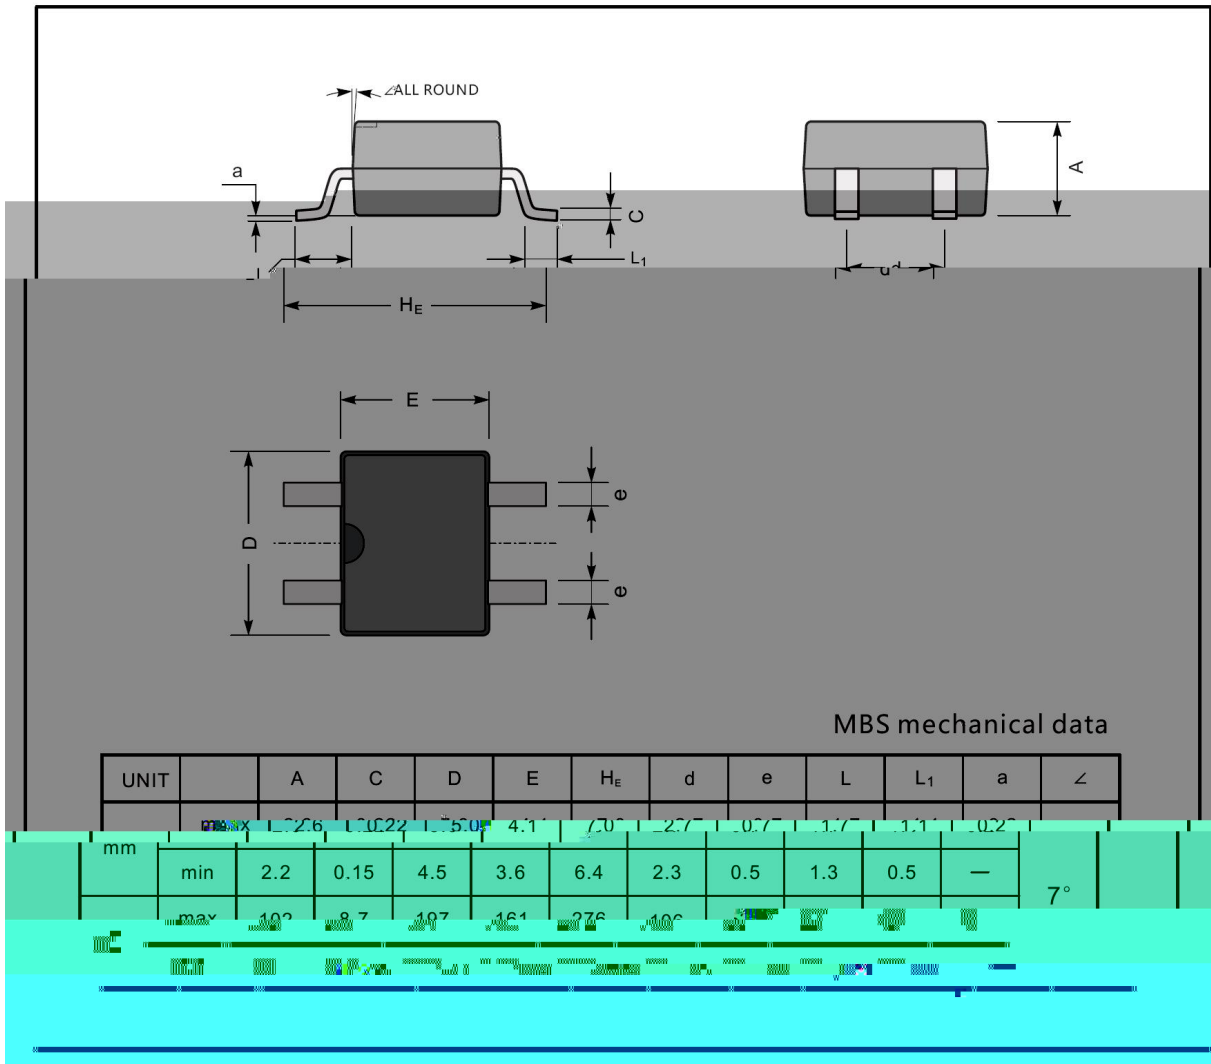

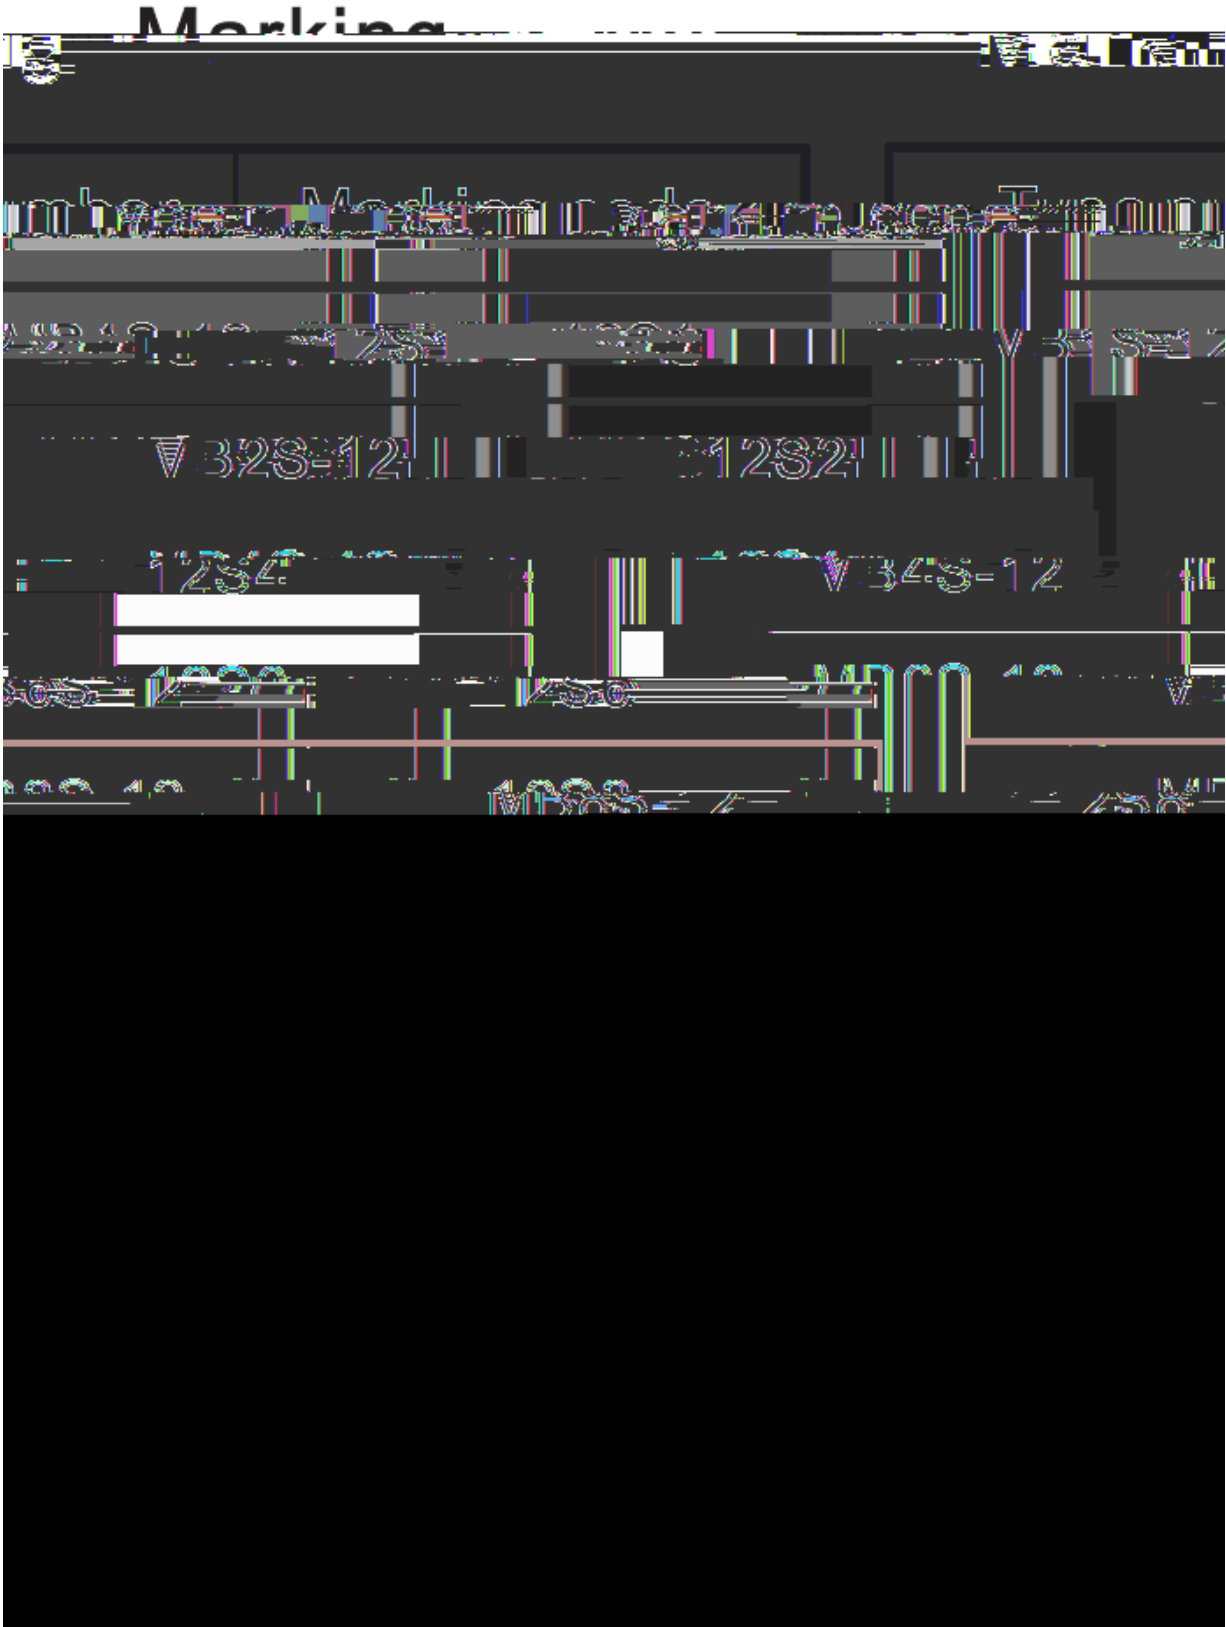

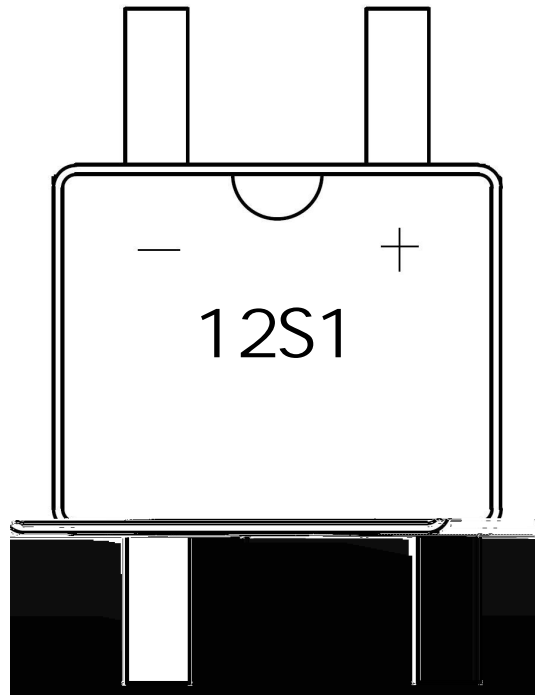

12S1


1

3

Note:

12S1 Product Type Code

Lot No. Code The 1st means:YM Code The last 3 means:little Lot  
No Code

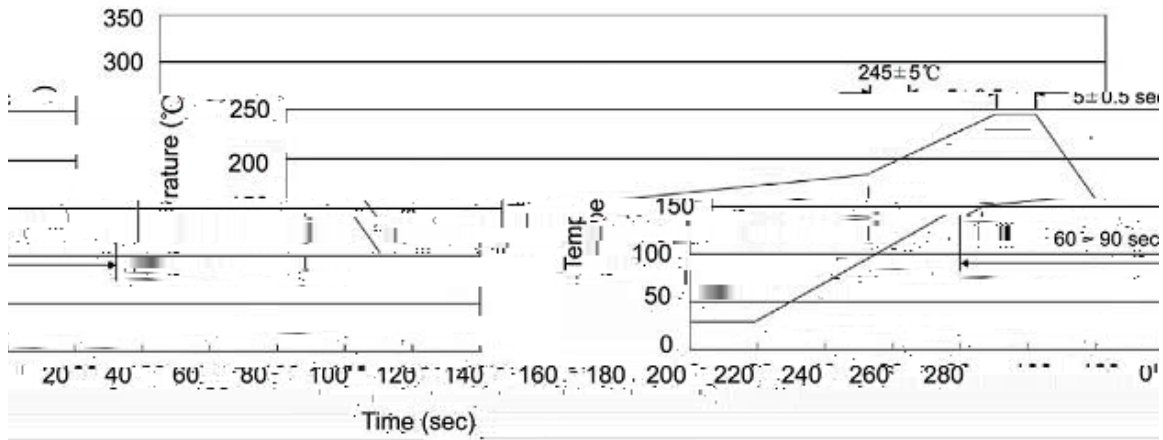
**Note:**

- |   |             |                  |  |
|---|-------------|------------------|--|
| 1 | 150 ~ 180   | 60 ~ 90sec;      | 1.Preheating:150~180 , Time:60~90sec.                  |
| 2 | $245 \pm 5$ | $5 \pm 0.5$ sec; | 2.Peak Temp.: $245 \pm 5$ , Duration: $5 \pm 0.5$ sec. |
| 3 | 2 ~ 10      | /sec.            | 3. Cooling Speed: 2~10 /sec.                           |

 $260 \pm 5$ 
 $10 \pm 1$  sec.

 Temp.: $260 \pm 5$ 

 Time: $10 \pm 1$  sec