

MSB40B-MSB40M



DATA SHEET

100V~1000V


4.0A

/ Electrical Characteristic Curve



/ Package Dimensions

UMSB

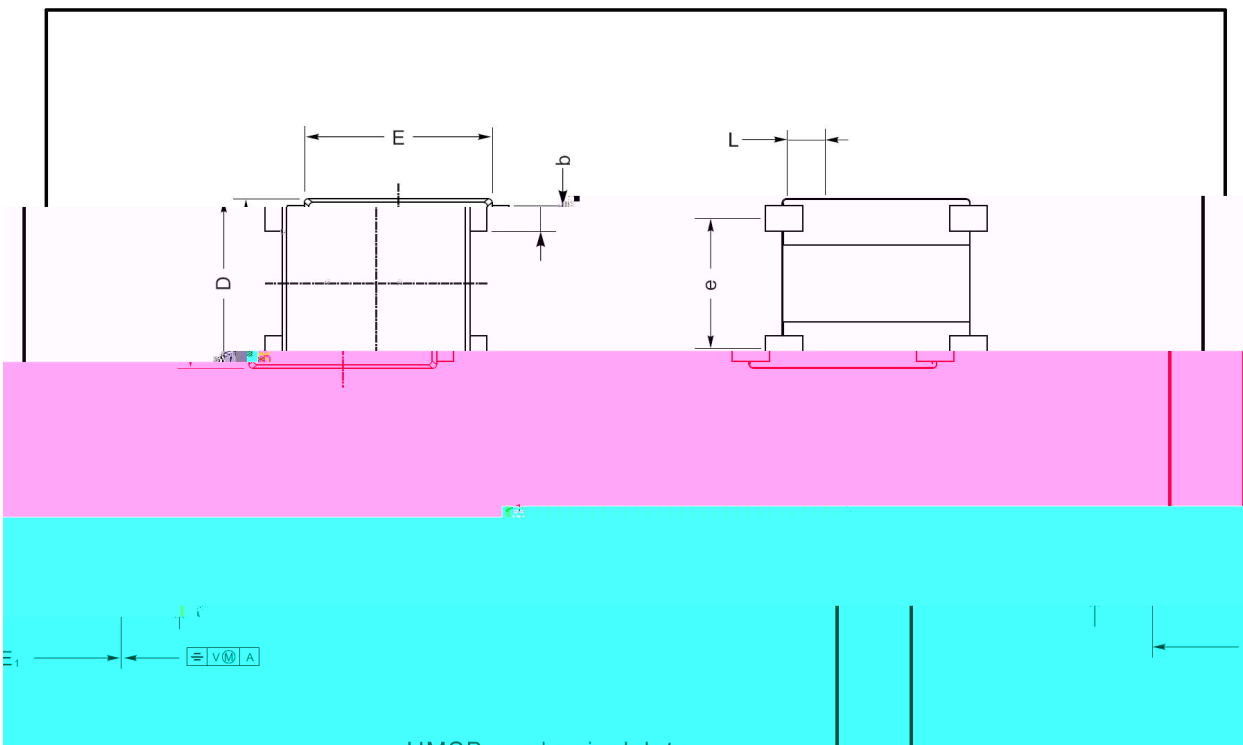

UMSB mechanical data

A	C	D	E	E ₁	L	e	b	∠	UNIT		
0.29	0.29	7.0	7.0	8.9	1.0	0.5	1.13	45°	mm	max	1.1
0.17	0.17	6.2	7.1	8.4	1.0	4.9	0.95	10°	mm	min	1.0
12	276	299	350	55	209	45			mil	max	59
7	244	280	331	31.5	193	37			mil	min	51


/ Marking Instructions

Marking

Number	Marking code
40B	MB40B
40D	MB40D
40G	MB40G
40J	MB40J
40K	MB40K
40M	MB40M

Type number
MSB40B
MSB40D
MSB40G
MSB40J
MSB40K
MSB40M

/ Marking Instructions

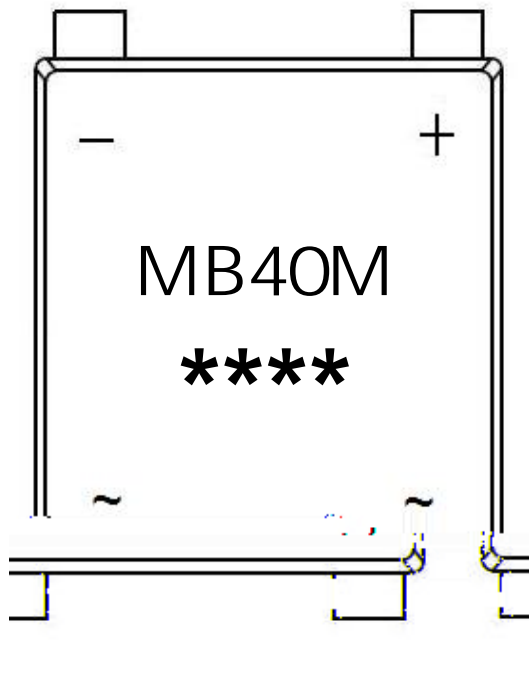

MB40M

1 *


3 *

MB40M

*

*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

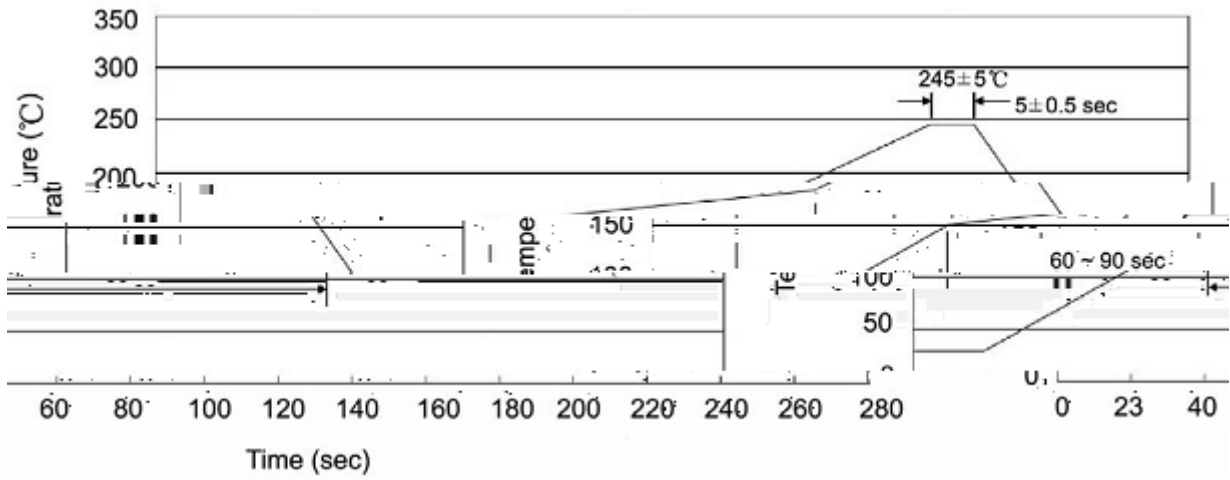

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.