

MUR1060CT

Rev.G Oct.-2018

/ Descriptions

TO-220

Ultrafast Recovery Diode in a TO-220 Plastic Package.


/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode.

/ Equivalent Circuit



/ Pinning



PIN1 Anode

PIN 2 Cathode


PIN 3 Anode

/ h_{FE} Classifications & Marking


See Marking Instructions

/ **Electrical Characteristic Curve**

/ Package Dimensions

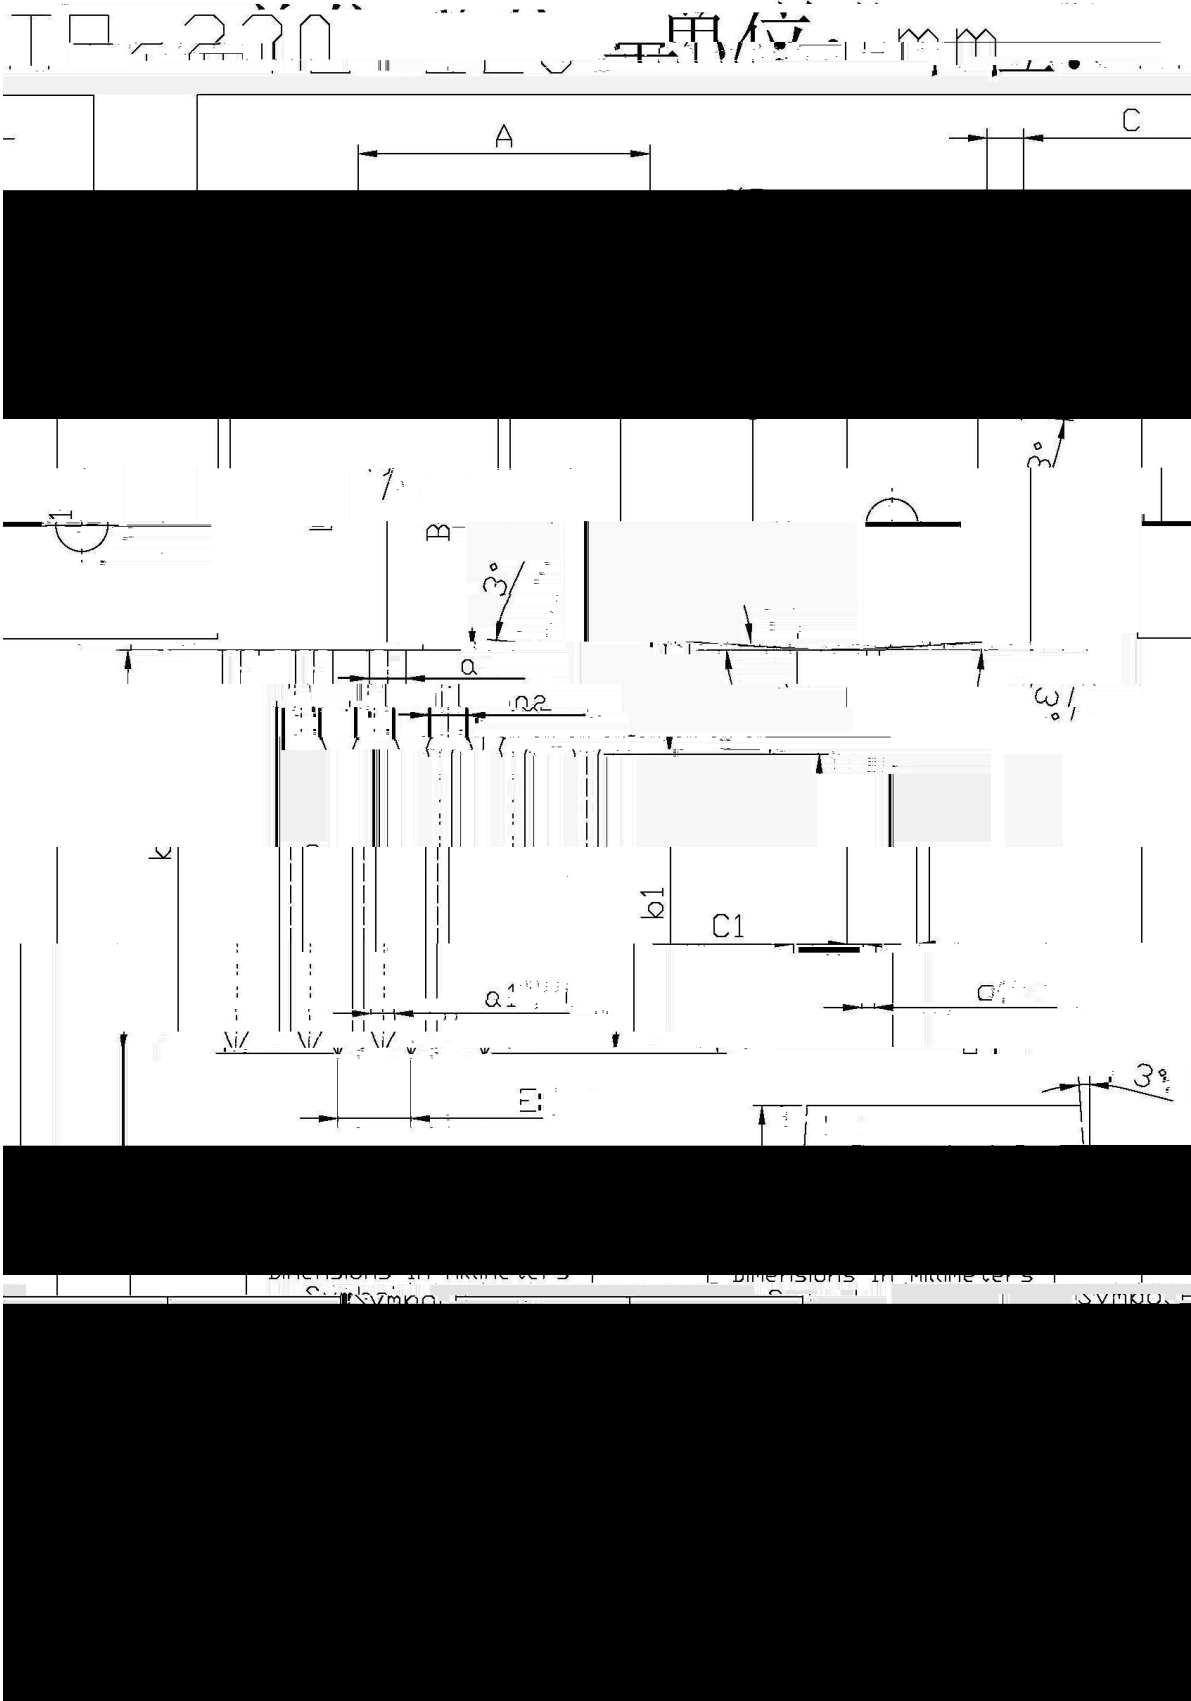

/ Marking Instructions

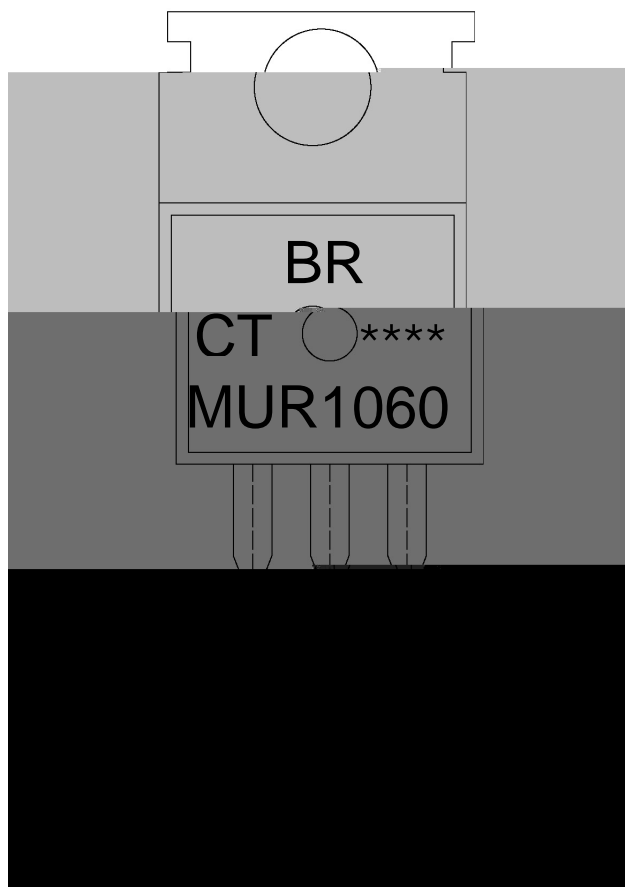

BR

MUR1060

CT:

Note:


BR: Company Code

MUR1060 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

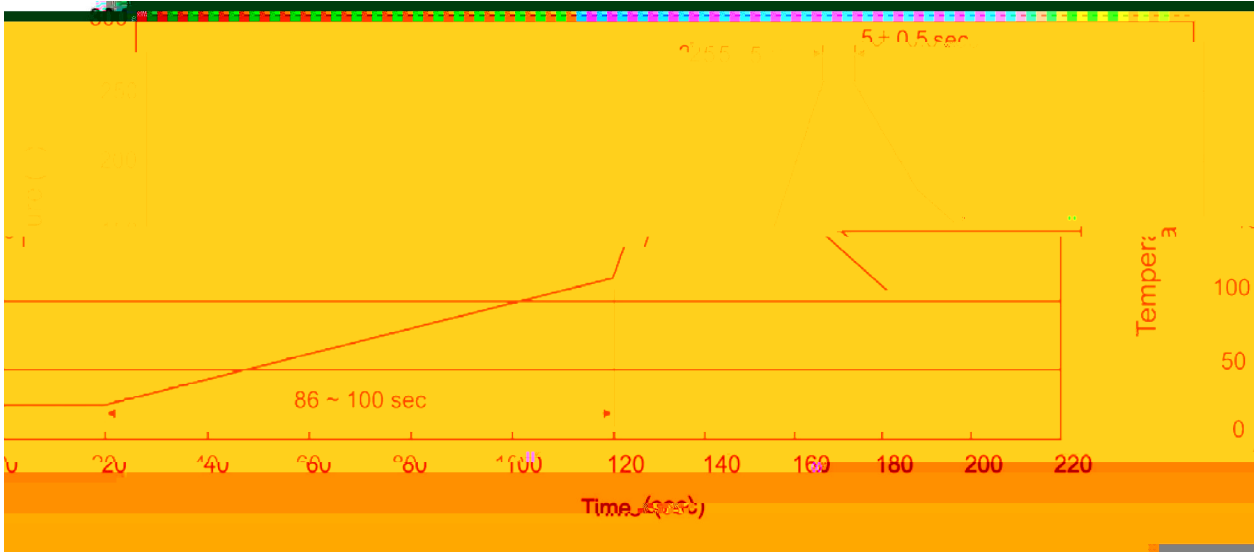

Note:

- | | | | | | |
|---|-------|-----|-----------|---------------------------------------|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. | |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180