

MUR1640CT

DATA SHEET

/ Absolute Maximum Ratings(Ta=25)






| | | | |
|--|--|---|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | × | |
| | | | |
| | | | |
| | | | |

/ Electrical Characteristics(Ta=25)

| | | | | | | |
|--|--|--|--|--|--|--|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

(%


/ Electrical Characteristic Curve

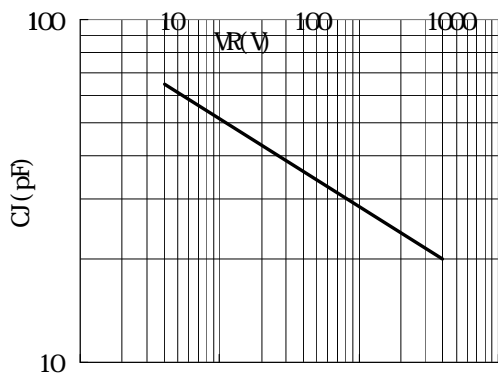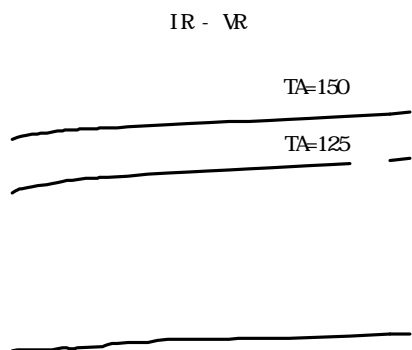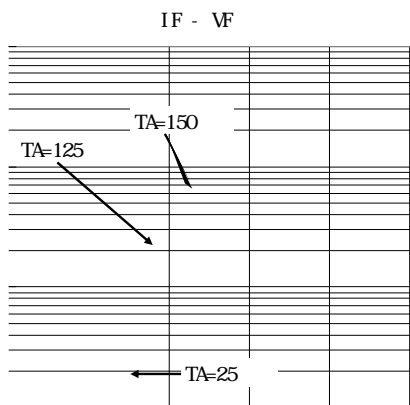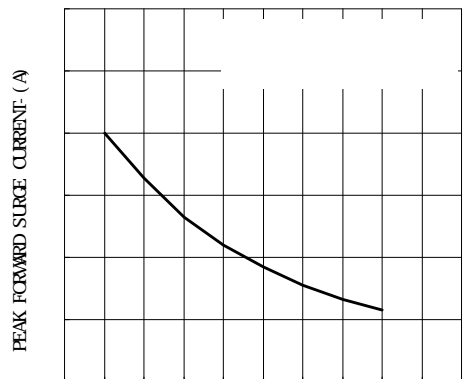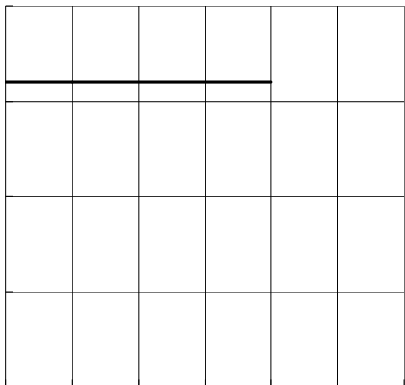

MUR1640CT

DATA SHEET

/ Marking Instructions

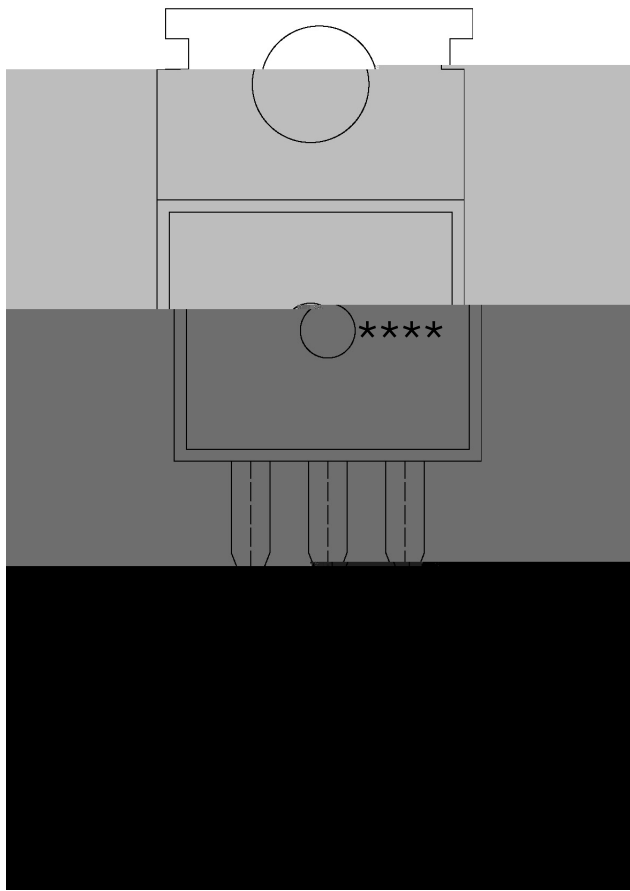


ML R(64'

CK:

ML R(64'

CK

() / Temperature Profile for Dip Soldering(Pb-Free)

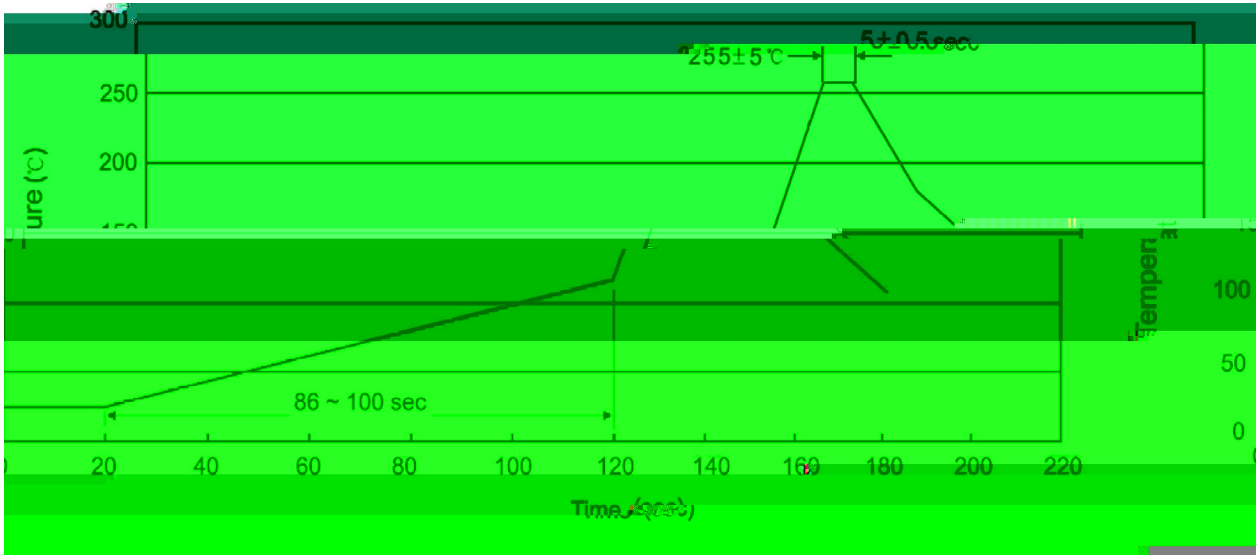

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| | Units/Bag / | Bags/Inner Box / | Units/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Bag | Inner Box | Outer Box |
|----------|-------------|------------------|-------------------|-------------------------|-------------------|---------|-------------|-------------|
| TO-220/F | 200 | 10 | 2,000 | 5 | 10,000 | 135×190 | 237×172×102 | 560×245×195 |

| | Units/Tube / | Tubes/Inner Box / | Units/Inner Box / | Inner Boxes/Outer Box / | Units/Outer Box / | Tube | Inner Box | Outer Box |
|----------|--------------|-------------------|-------------------|-------------------------|-------------------|--------------|------------|-------------|
| TO-220/F | 50 | 20 | 1,000 | 5 | 5,000 | 532×31.4×5.5 | 555×164×50 | 575×290×180 |

/ Notices