

MURB1660CT

Rev.F May.-2016

DATA SHEET






Parameter

Symbol


Rating

Unit

/ Electrical Characteristic Curve

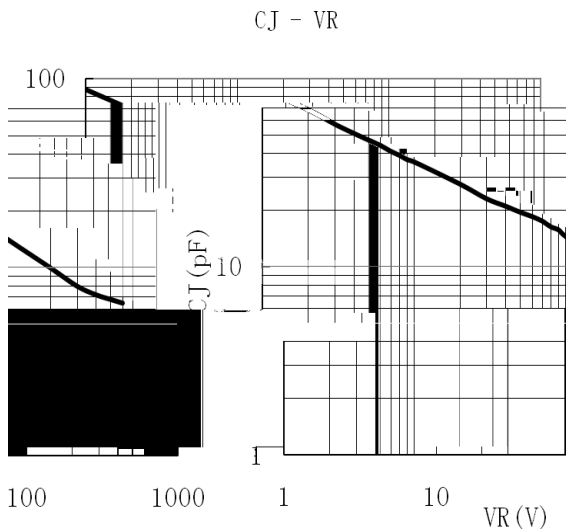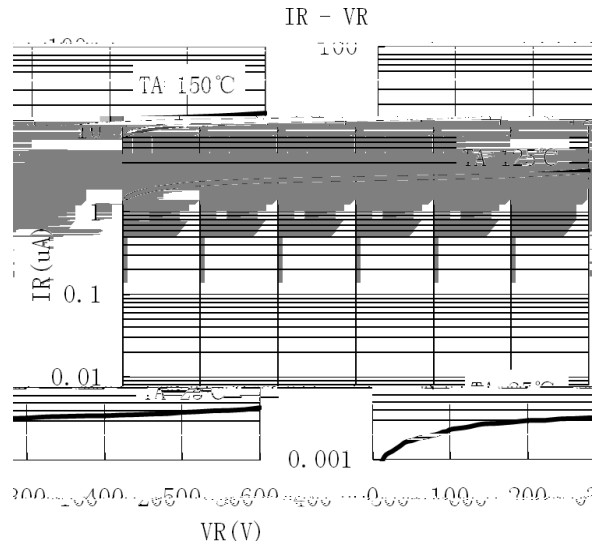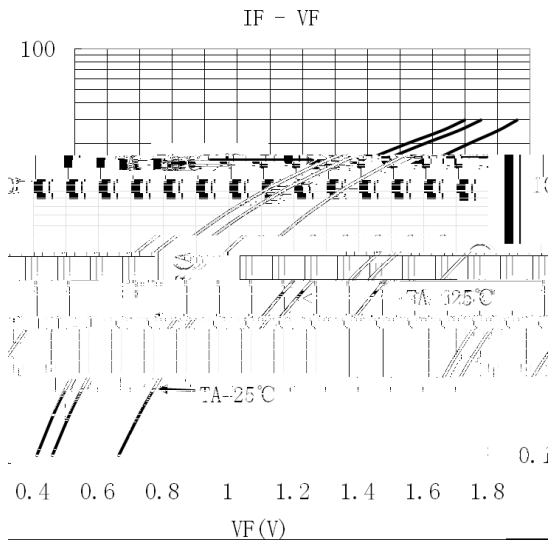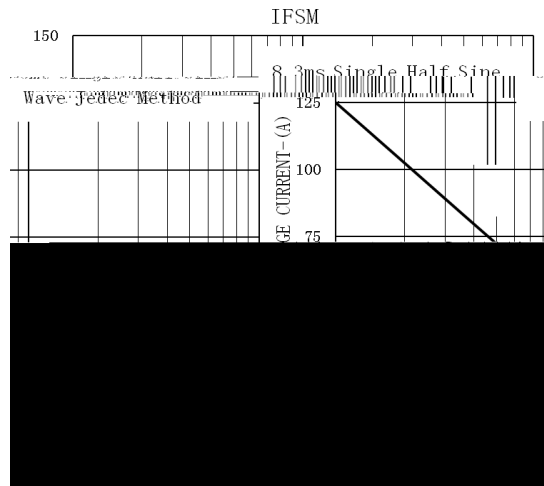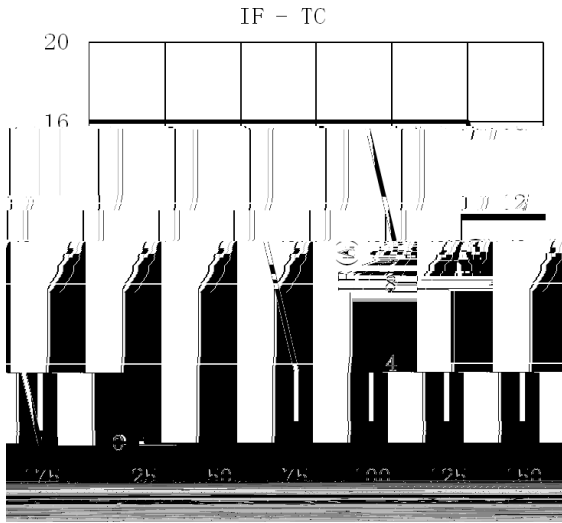

/ Package Dimensions

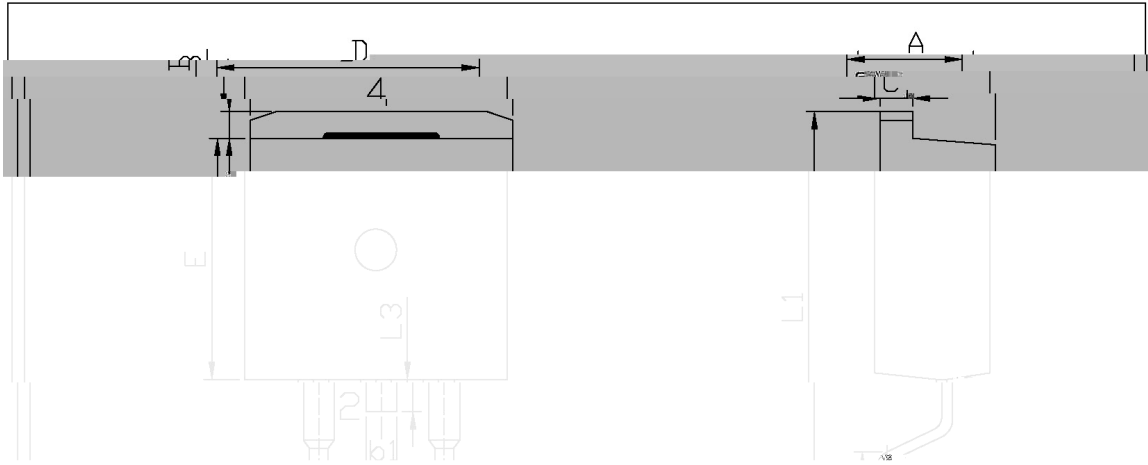


Max		Min		Max		Min	
a 30 _{uv}		A		4.30		a 30 _{uv}	
2.74		B		1.40		e1	
42.88	38.26			0.80	0.80	0.80	0.80
15.00	16.00	b1	1.15	1.35	L1		
2.24	2.84	b2	0.70	0.80	L2		
1.20	1.60	C	1.20	1.40	L3		
		D	9.80	10.20			

T0-263

MURB1660CT

Rev.F May.-2016

/ Marking Instructions

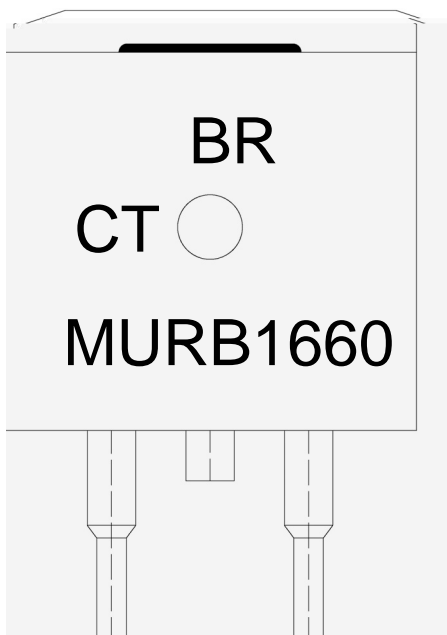

BR

MURB1660

CT:

Note:


BR: Company Code.

MURB1660 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

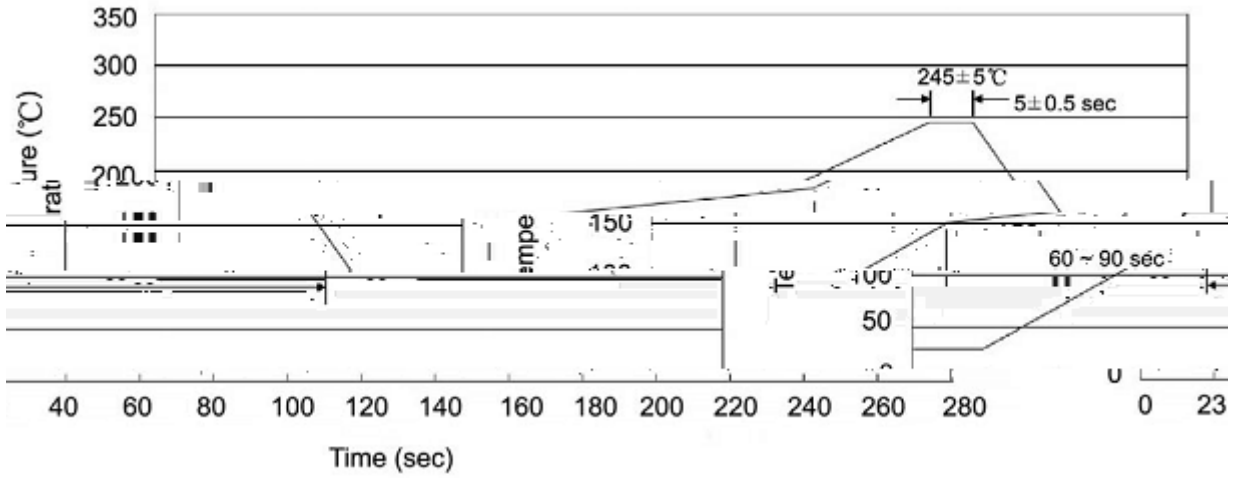

Note:

- | | | | | | |
|---|-------|-----|-------|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5 | sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	

/ TUBE

Package Type 封装形式	Units 包装数量	Dimension 包装尺寸 (unit: mm ³)
只套管		