
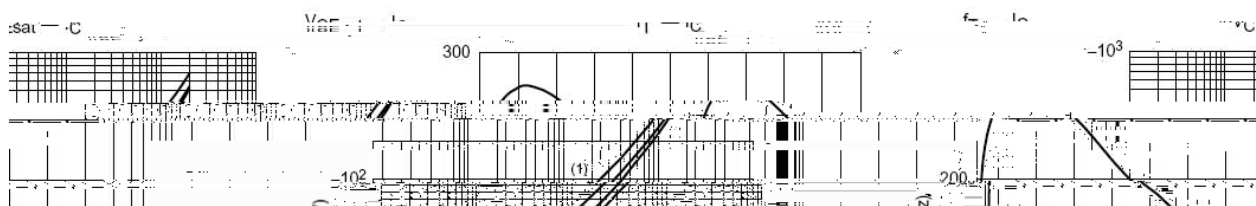


SOT-23 PNP Silicon PNP transistor in a SOT-23 Plastic Package.

Low $V_{CE(sat)}$, high current, HF product.


γ ' Н '

/ Electrical Characteristic Curve

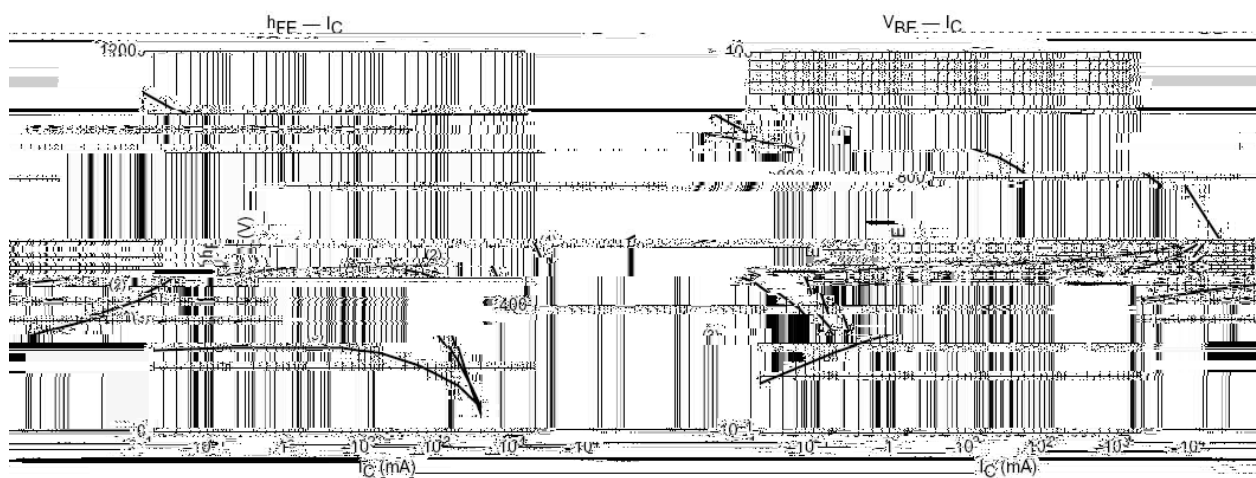


SOT-23

单位:  

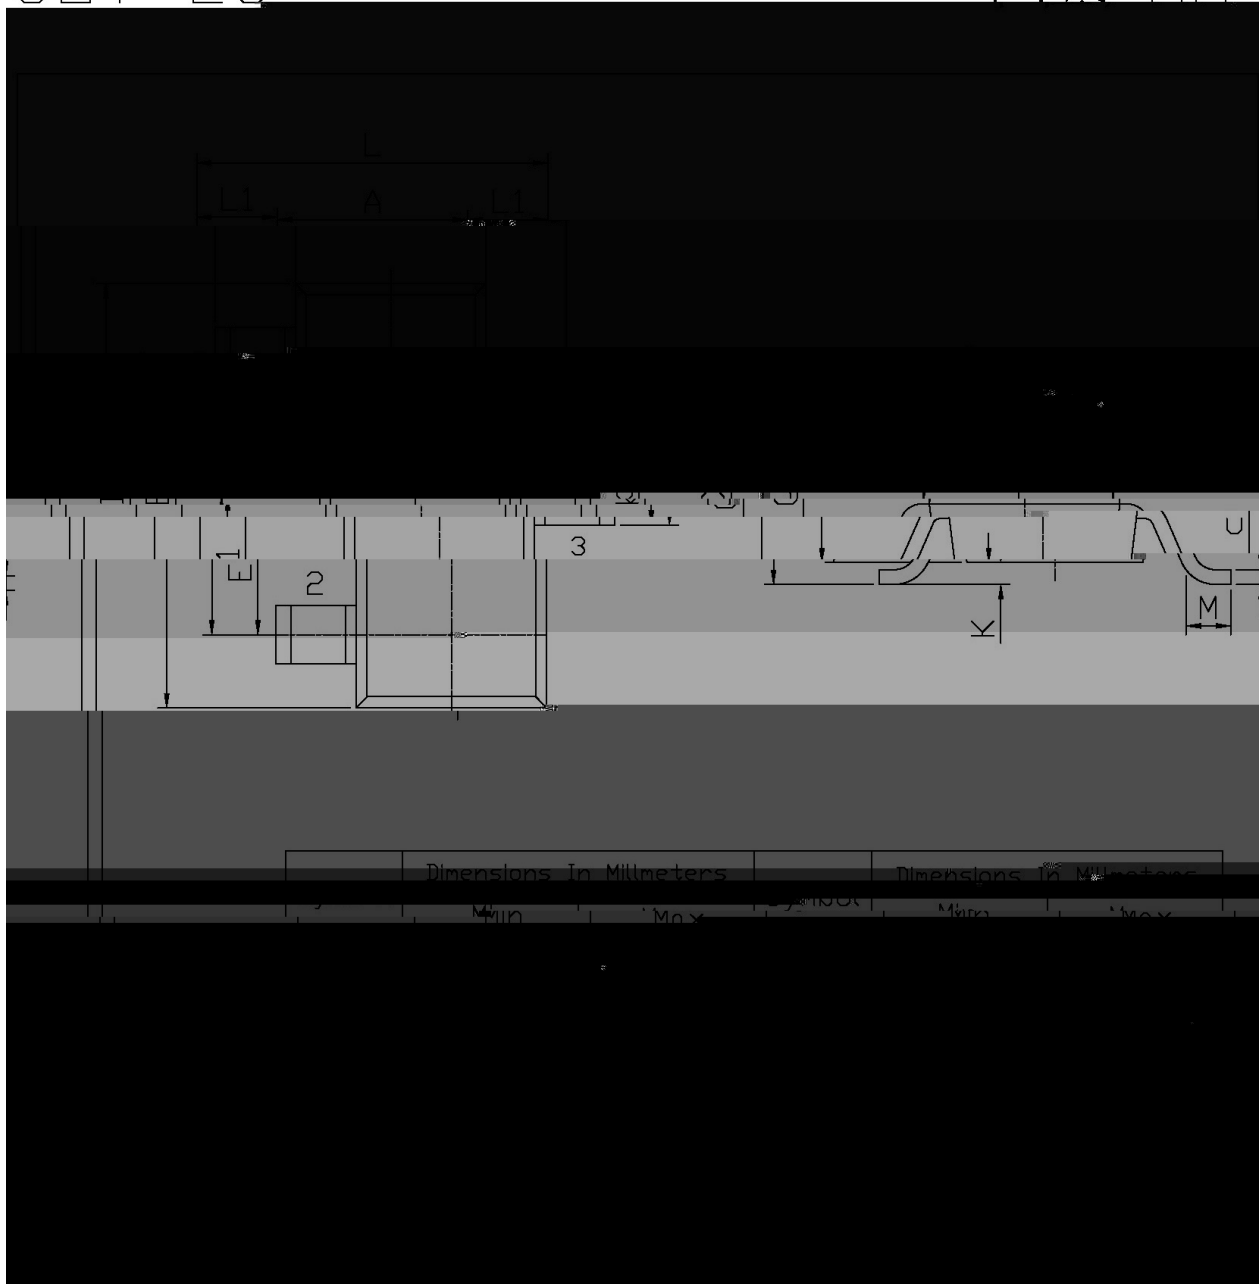

/ Marking Instructions

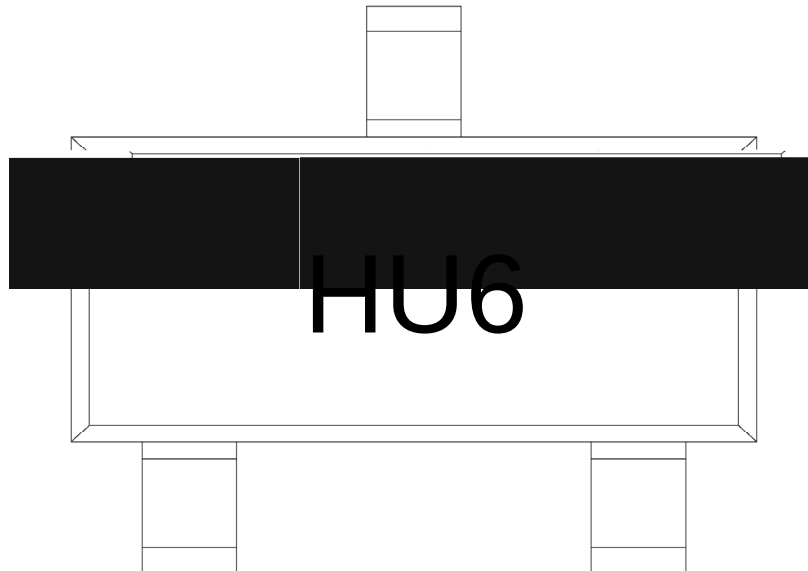

H

U6

Note:

H Company Code

U6 Product Type Code

() / **Temperature Profile for IR Reflow Soldering(Pb-Free)**

Note:

- | | | | |
|---|-----------|-------------|---|
| 1 | 150 ~ 180 | 60 ~ 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ **Resistance to Soldering Heat Test Conditions**

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ **Packaging SPEC.**

/ REEL r