


RS3AC~RS3MC

Rev.B Feb.-2021


RS3AC~RS3MC

Rev.B Feb.-2021






DATA SHEET

Parameter	Symbol	Rating							Unit
		RS3AC	RS3BC	RS3DC	RS3GC	RS3JC	RS3KC	RS3MC	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum A	$I_{um A}$		u	m					



\$, - 1 2 3 / Electrical Characteristic Curve

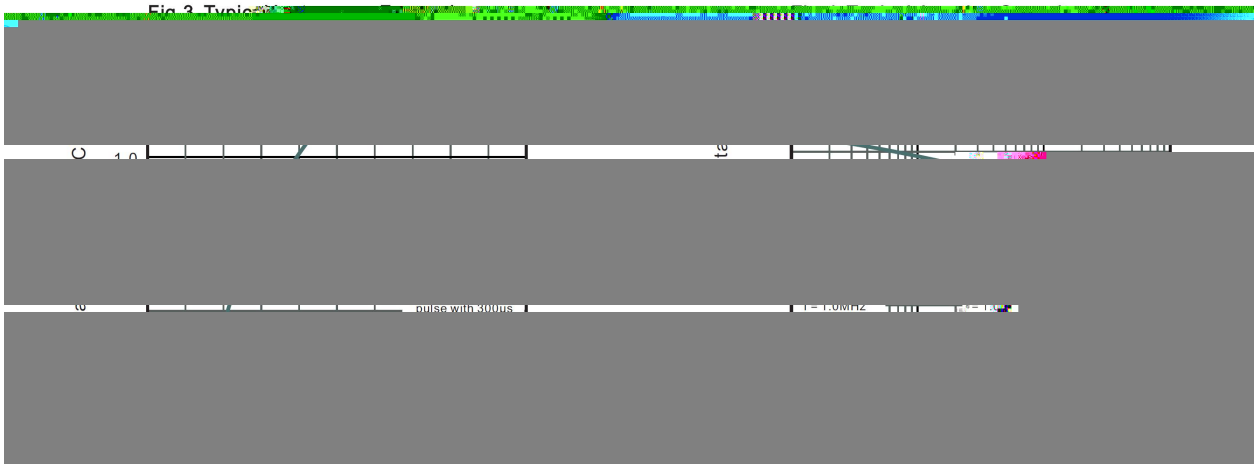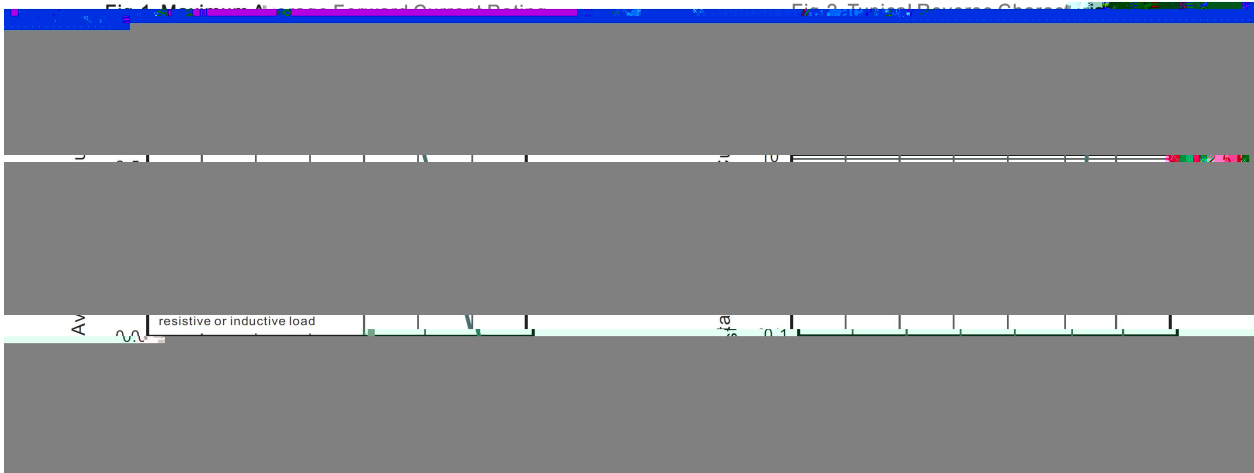




89 / Marking Instructions




RS3AC~RS3MC

Rev.B Feb.-2020



DATA SHEET

< = > ? @ 1 2 3 (A B) / CDE FDGH I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b c d e f g h i j k l m n o p q r s t u v w x y z { | } ~

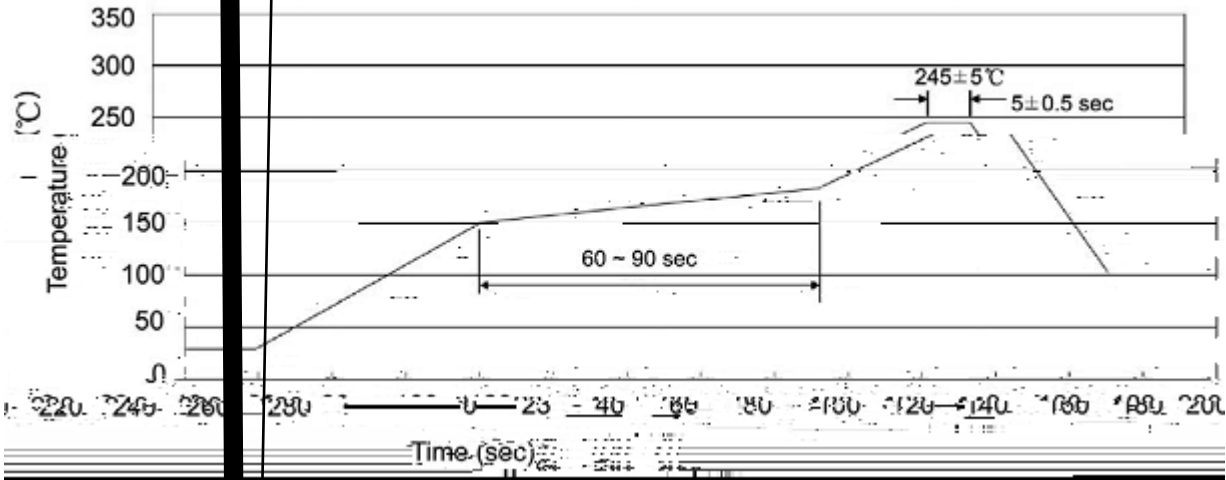

Note:

- 1. Preheating: 25~150°C, Time: 60~90sec.
- 2. Peak Temp.: 245±5°C, Duration: 5±0.5sec.
- 3. Cooling Speed: 2~10°C/sec.

Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.: 260±5°C Time: 10±1 sec

Packaging SPEC.

/ REEL

Package Type	Units				Units/Outer Box 只/箱	Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱		Reel	Inner Box	Outer Box