



Rev. A Nov.-2019

@ A B C D E ? F G H I J K L M N O P Q 3 R K S M N G P 2 T 3 1 K U V W X C Y

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage P 60V, Forward Current: 2.0A ,SMB package.

Z [\ K] ^ _ K] S M ` a N G b c K d e @ A B C Y f g h i Y



Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.

j k e l T

General purpose.





Rev. A Nov.-2019

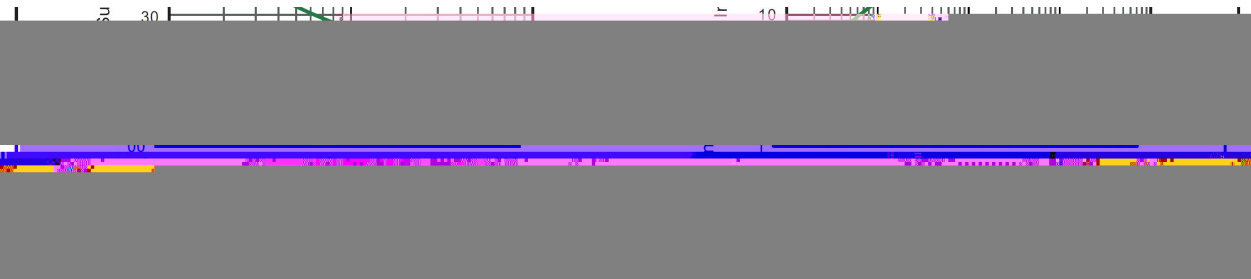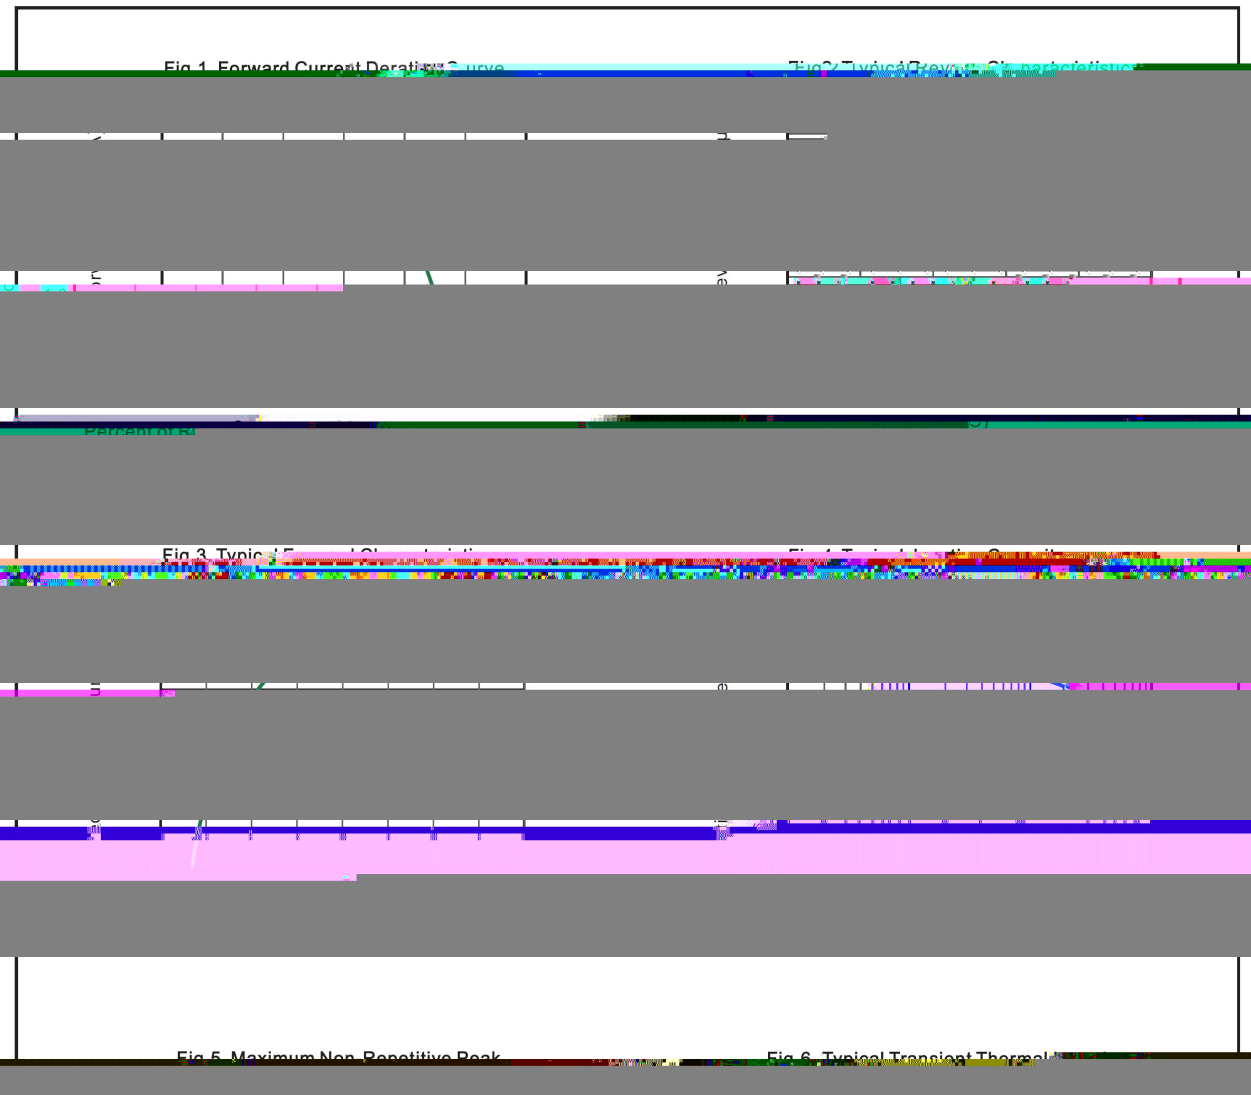




SMB

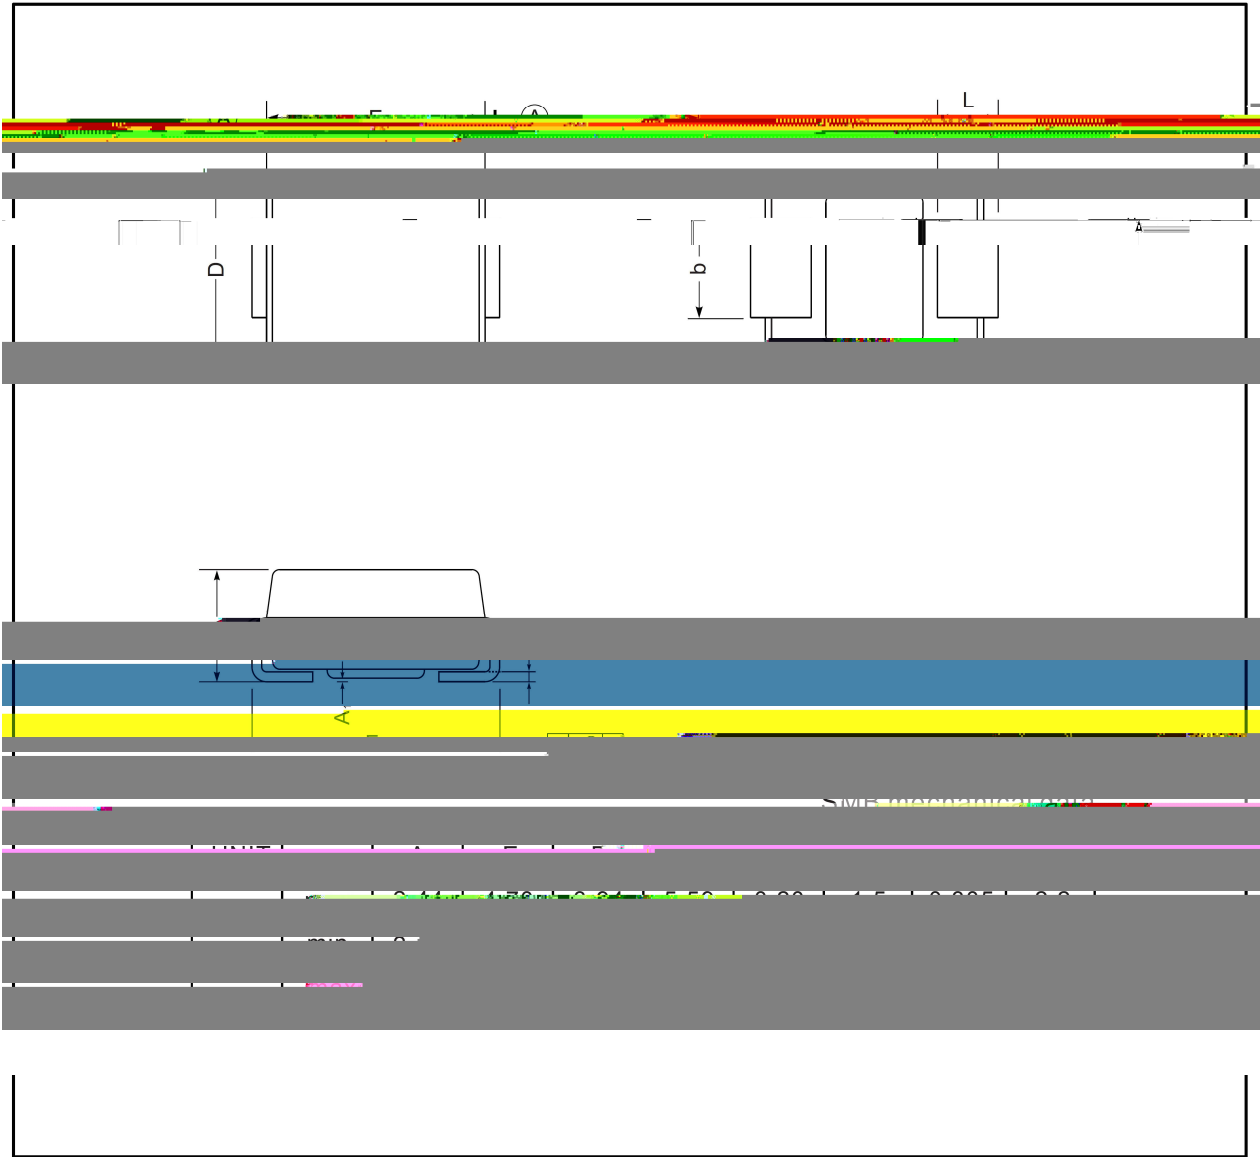

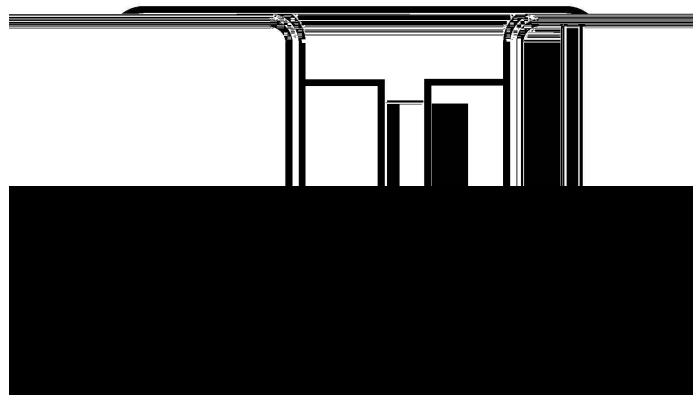

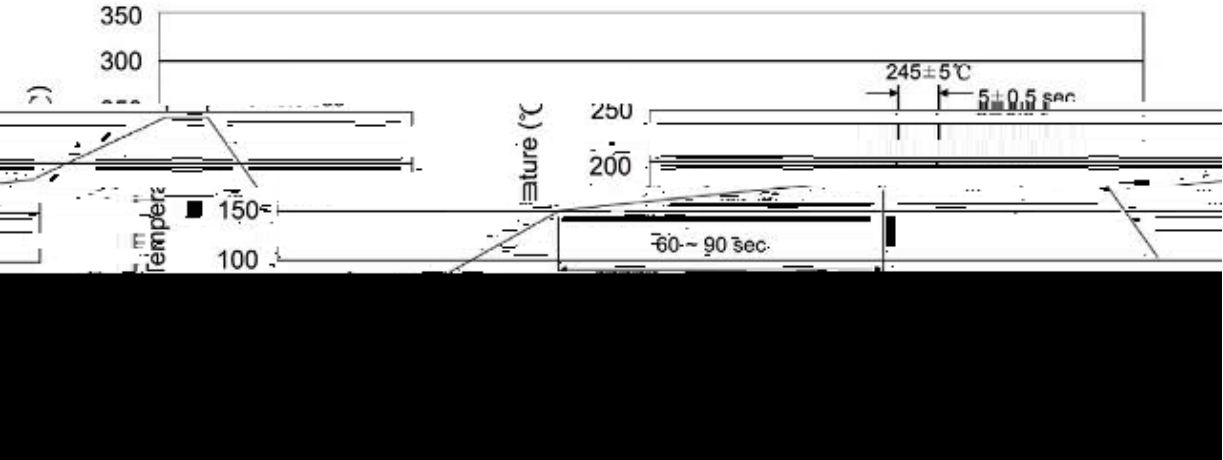

- 1

150 180

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10 /sec.
- Note:

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units / Reel 只 / 卷盘	Units / Reel 只 / 卷盘	Units / Reel 只 / 卷盘	Units / Reel 只 / 卷盘	Units / Reel 只 / 卷盘	Length mm	Width mm	Height mm
SMB	3000	5	15000	5	75000	7" ×11	185X180X105	390X385X205