


A	2020-6-3	ALL	SMA-S-SSL34-3A40V		



" " (" " # * - 0 / , 9 : , 1 7 - "

40V 3.0A SMA

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40V, Forward Current: 3.0A ,SMA thin package.

" " (" " ; * 5 : < / * - "


Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.

"

" " (" " \$ 9 9 = , 0 5 : , 1 7 - " "

General purpose.

" " (" " ' > < , + 5 - * 7 : " ? , / 0 < , : "




" " (" " @ , 7 7 , 7 8 "



" " (" " 4 5 / 6 , 7 8 "

See Marking Instructions.



"

参数
Parameter

符号
Symbol

数值
Rating




!"
Rev.A Jun.-2020

#\$%\$" & ' '%

" " (" " 45/6,78"j7-:/<0:,17 - "

SSL 34	SSI 34
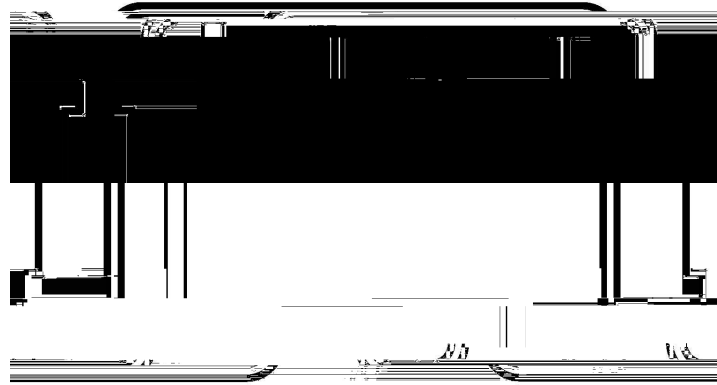
$$\begin{array}{ccccccc} & & & & & & d \\ & & & & & & d \\ & & & & & & d \\ & & & & & & \\ & & & & & & d \\ & & & & & & \\ & & & & & & d \\ & & & & & & d \\ & & & & & & d \\ S & & & & & & d \end{array}$$


LLL"

1 *

3 *

LLLL Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No

!"