

**5 é / Descriptions**

n μ É xRK Ô Â ... v 8 â ' k F g 9 y < k 3 g v y ' k 9 3 ( / xož  
Surface Mount Schottky Barrier Rectifiers, Reverse Voltage y 40V, Forward Current: 3.0A ,SMB package.

**α<sup>a</sup> / Features**

z ô k ä | ä k ä 3 g ~ ... v k n μ É x k —) í D } ož  
Low power loss, High efficiency, High forward surge current capability, For surface mounted applications, HF Product.

**Đ ÷ / Applications**

%<sup>2</sup> " (ož  
General purpose.

**Ã W] Ô · / Equivalent Circuit**




**• Ū - æ / Pinning**



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

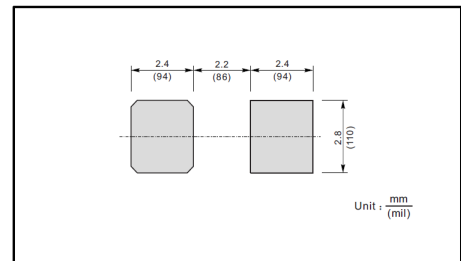


**, M V / Marking**


Type number	Marking
SSL34B	SSL34



Ô ? d • Ž ϕ / Electrical Characteristic Curve

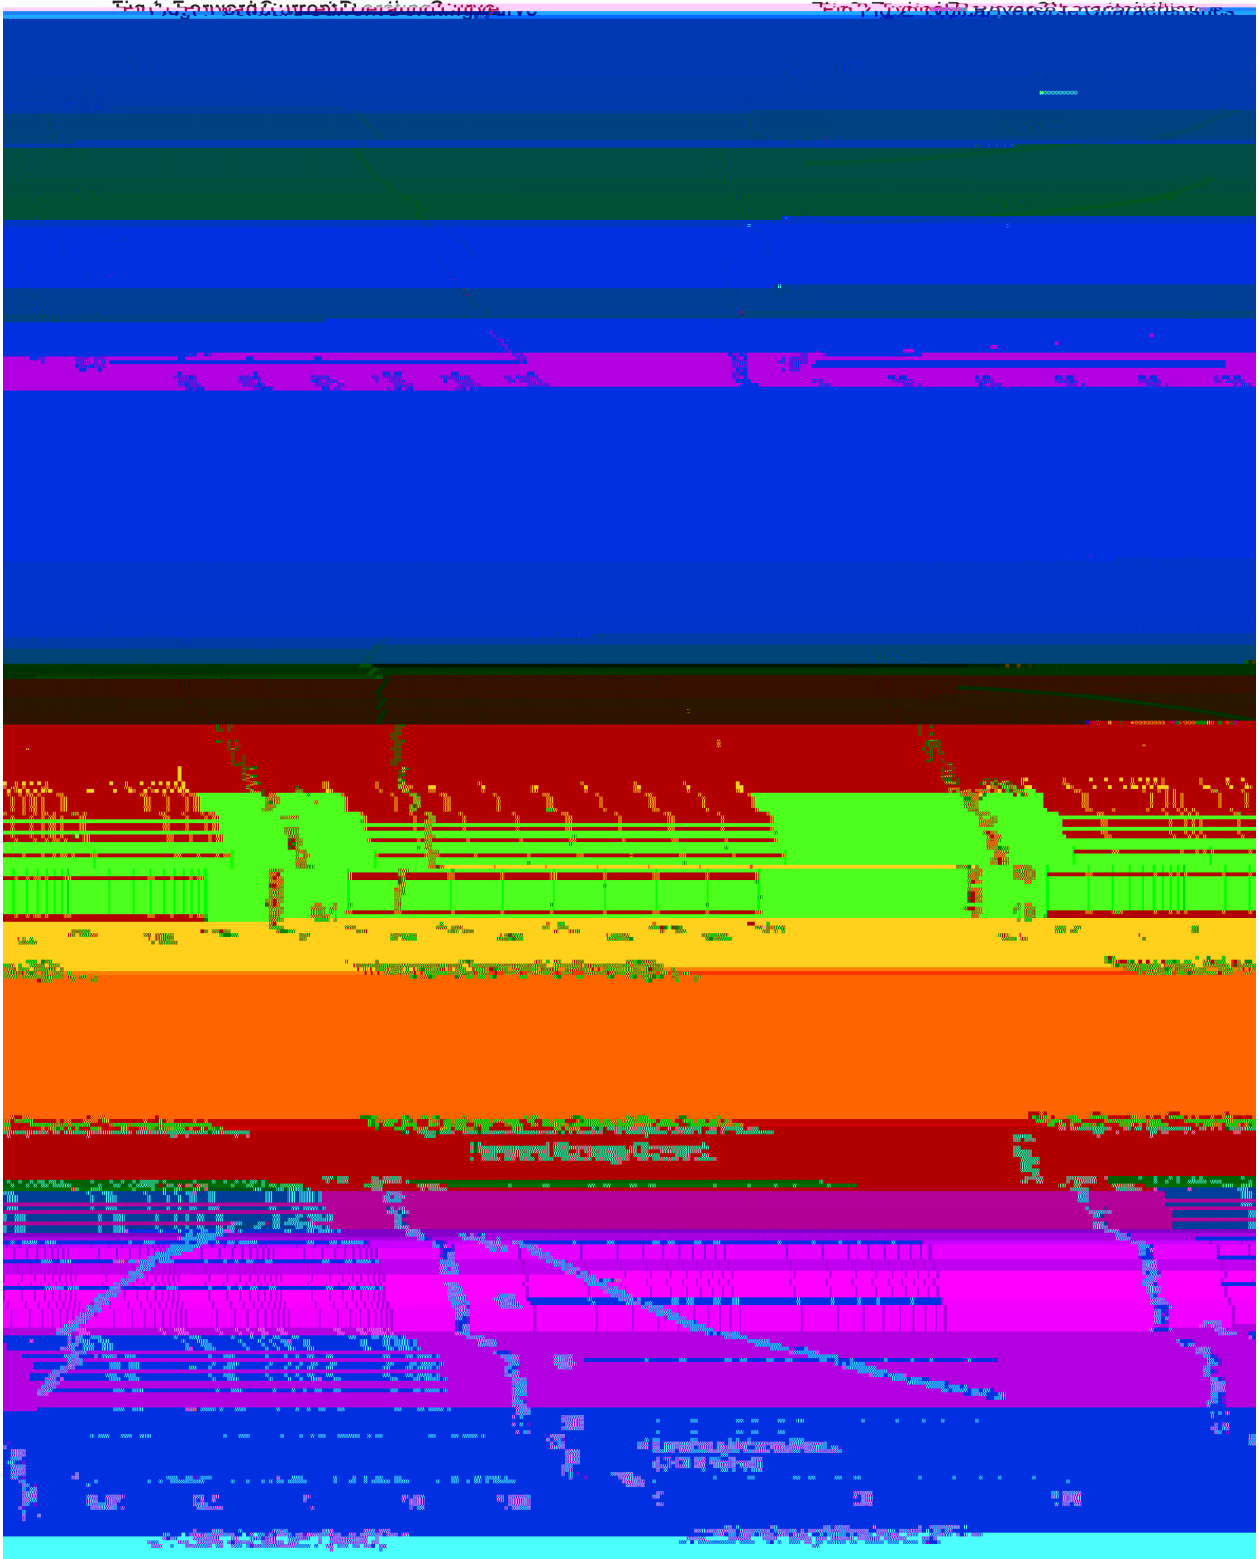

Ø ≡ ) ϕ / Package Dimensions

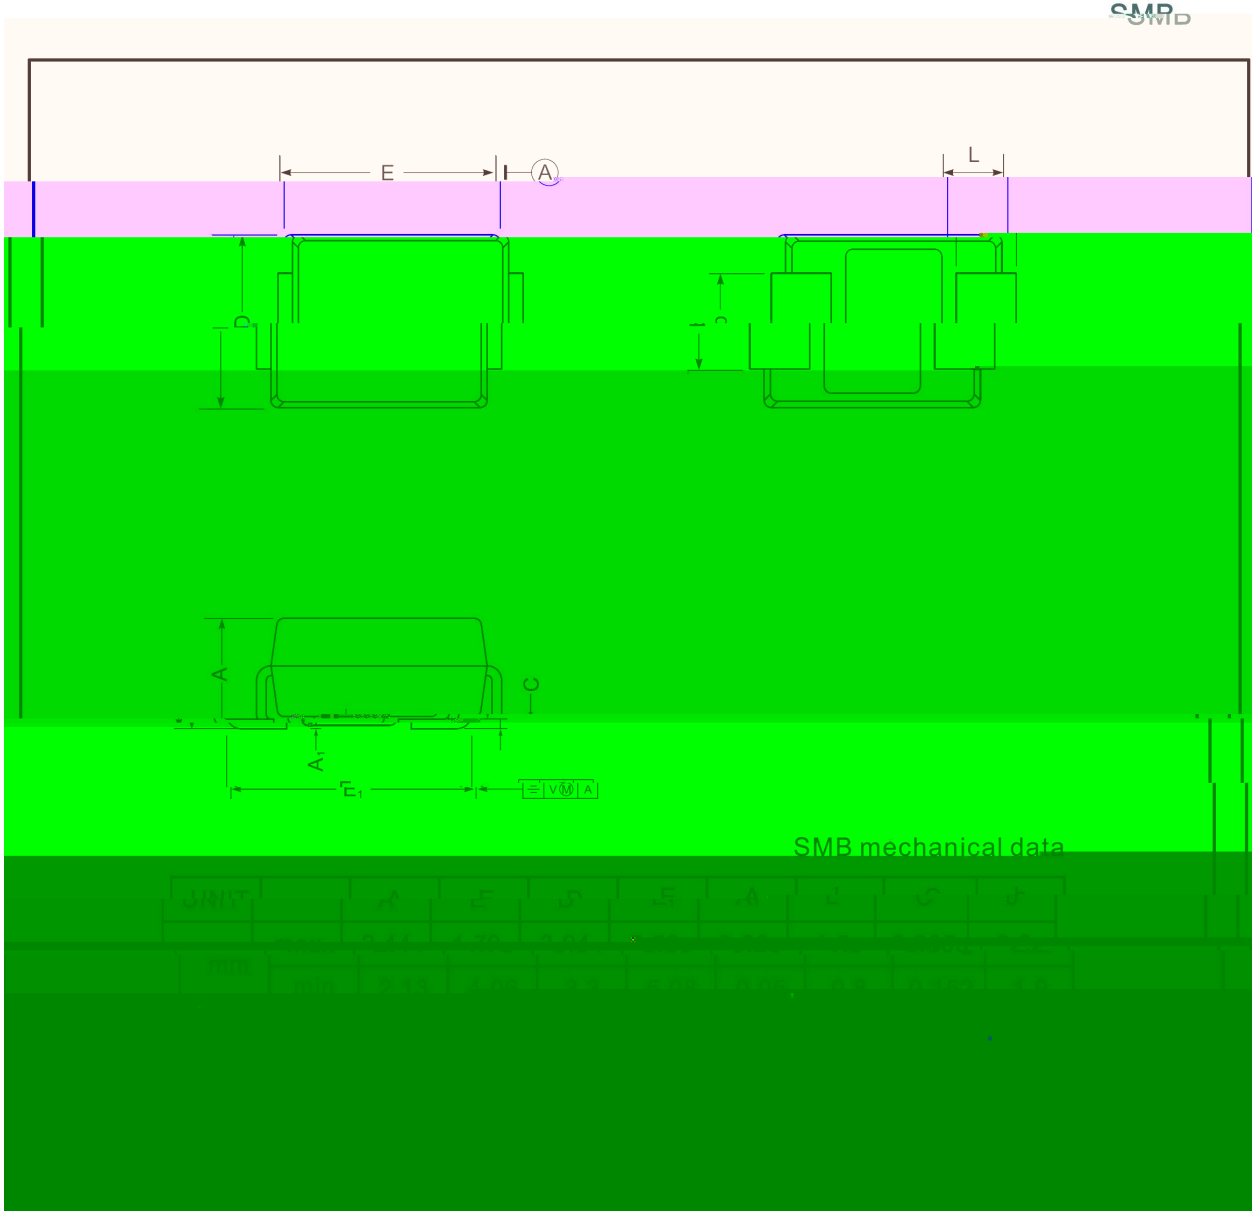

, M y f / Marking Instructions



<sup>a</sup> ç y  
9 9 2 y ° Z W A  
\*\*\*\* y ý D Z W A k š ý D Z J

Note:

9 9 2 y Product Type Code  
\*\*\*\* y Lot No. Code, code change with Lot No Code

