

5 é / Descriptions

n μ É xRK Ô Â 8 â ' k F g 9 y < k 3 g v y ' k V ° SMBF / xož
Surface Mount Schottky Barrier Rectifier, Reverse Voltage:40V,Forward Current:3.0A,SMBF thin package.

□ª / Features

z ô k ä | ä k ~ ... v Ý k 9 z 9 k ä È y â Å ' k 9 n μ É xož —)í D }ož
Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.


Đ ÷ / Applications

%² " (
General purpose.


Ã W] Ô · / Equivalent Circuit



• Ů - æ / Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

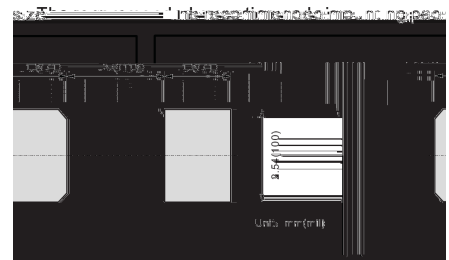

, M V / Marking

• - ~ª ¢ož See Marking Instructions.

Table 1 / Absolute Maximum Ratings(Ta=25 °C ;)

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS voltage	V_{RMS}	28	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Rectified Current at $T_c=100$	I_{FAV}	3.0	A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	80	A
Typical Junction Capacitance ¹	C_j	350	pF
Typical Thermal Resistance ²	R_{JA}	47	/W
Operating Junction Temperature Range	T_j	-55~+150	
Storage Temperature Range	T_{stg}	-55~+150	

Note:

1 Measured at 1MHz and applied reverse voltage of 4 V D.C.

2 P.C.B. mounted with 2.0 X 2.0" (5 X 5 cm) copper pad areas.

Table 2 / Electrical Characteristics(Ta=25 °C ;)

Parameter	Symbol	Test condition	Rating	Unit
Max Instantaneous Forward Voltage	V_F	$I_F=3.0A$	0.45	V
Maximum DC Reverse Current at Rated DC Reverse Voltage	I_R	$T_a=25$	0.3	mA
		$T_a=100$	5	

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ø □ =) ¢ / Package Dimensions

, M y f / Marking Instructions

9 2 (

^a ¢ y

SL34B y ° Z W A

**** y ¨ D Z A Ç A k † 1 * v Ã W A k e μ 3 * ¢ Ã 4 Z W A

Note:

SL34B y Product Type Code

**** y Lot No. Code k The 1st * means:YM Code k The last 3 * means:little Lot No
Code

šWD t...•Ž¢ (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

^a¢y

- 1o•Ä½“† 150½180 - kž• 60½90sec;
- 2o•Q>“† 245 r5 - kž•4 Ò 5 r0.5sec;
- 3o•D Nò i Ò 0 , † 2½10 - /sec.

Note:

- 1.Preheating:150~180 - , Time:60~90sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3.