

SMAF


Surface Mount Schottky Barrier Rectifier, Reverse Voltage 60V, Forward Current 3.0A ,SMAF thin

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current at $T_c = 100\text{ }^{\circ}\text{C}$	$I_{F\text{ }AV}$	3.0	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	80	A


Typical Junction Capacitance¹⁾

/ Electrical Characteristic Curve





/ Marking Instructions

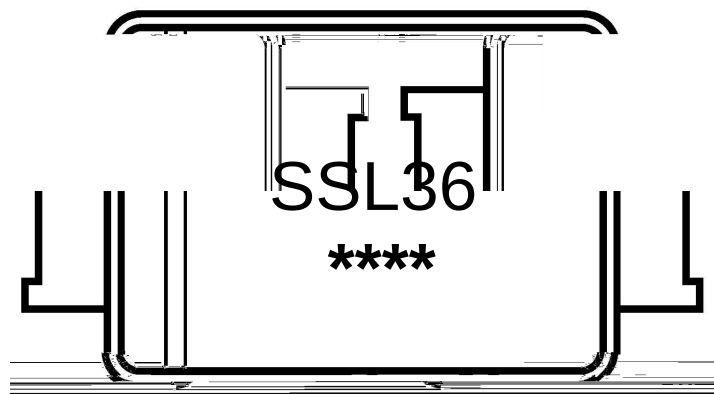

Note:

Product Type Code

Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

- Note:
- 1

150 180 60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245 5 5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------