

BRS2AFQ~BRS2MFQ
Rev.A Jun.-2024

50V ~ 1000V





2.0A SMAF

Note:


- 1 Measured at 1 MHz and applied reverse voltage of 4 V D.C
- 2 P.C.B. mounted with 2.0 X 2.0" (5 X 5 cm) copper pad areas.

Parameter	Symbol	Test condition	Rating	Unit
Maximum Instantaneous Forward Voltage	V_F	$I_F=2.0A$	1.1	V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	I_R	$T_a=25$	5.0	uA
		$T_a=125$	100 a	

/ Electrical Characteristic Curve

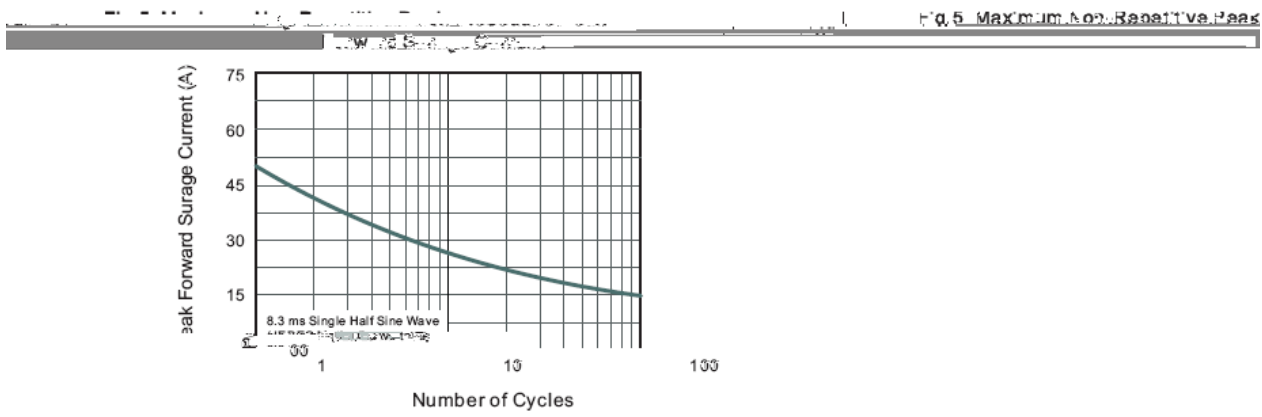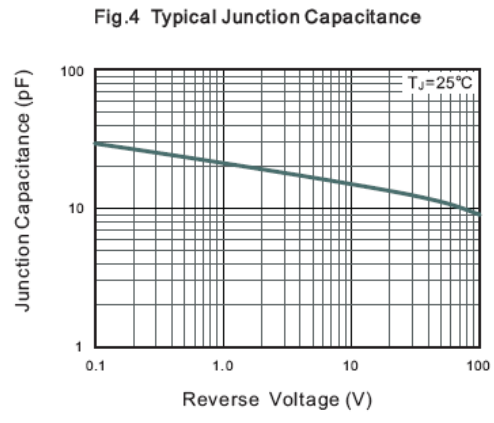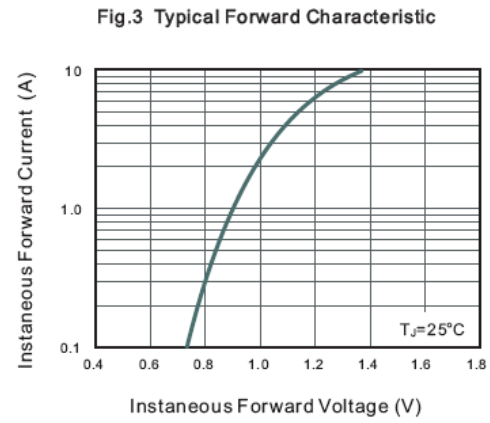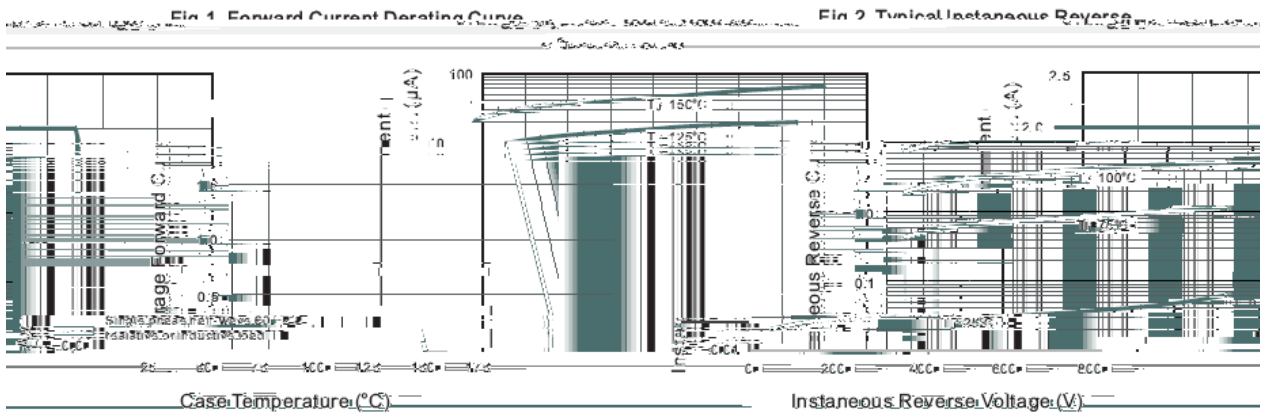

/ Package Dimensions

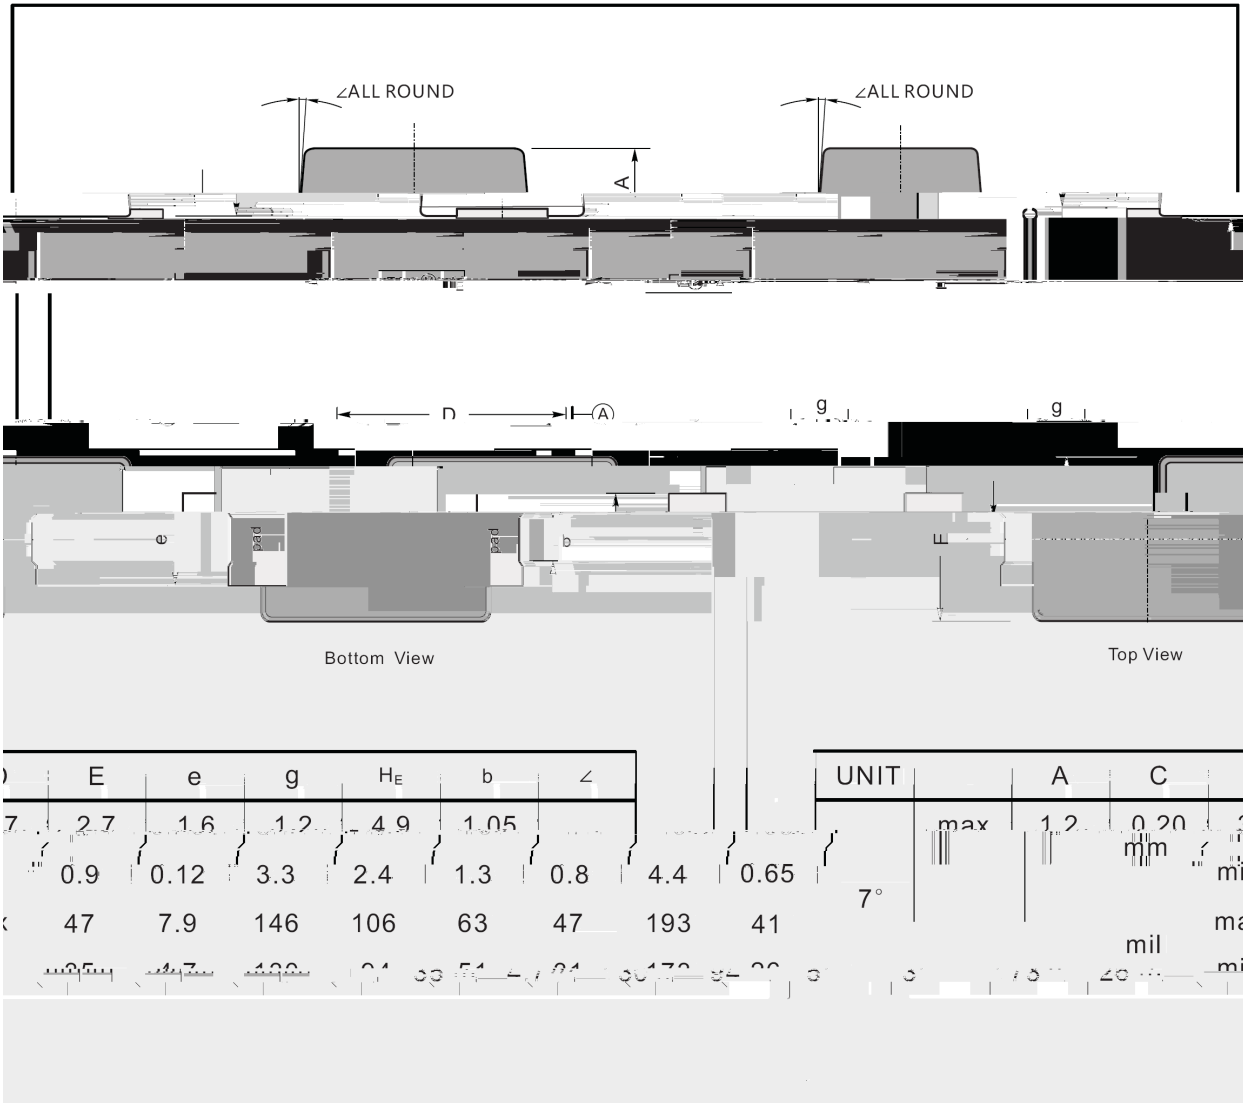

BRS2AFQ~BRS2MFQ

Rev.A Jun.-2024

DATA SHEET

